

M-SERIES CATALOG

ZONED COMFORT SOLUTIONS®



MAKE YOURSELF **COMFORTABLE**

It's more than just a tagline or marketing slogan. We work hard every day to ensure that you will be able to make yourself comfortable. No other company is as committed to creating environmentally friendly and affordable technology that's ideal for today's home, no matter the size or shape. With over 30 years of industry leadership, we are proud to be America's #1 selling brand of Zoned Comfort Solutions®.

QUALITY

Mitsubishi Electric is consistently recognized by HVAC contractors as the #1 preferred brand with the highest quality rating among manufacturers. Our products provide extraordinary service life, extending years beyond the norm, and have the lowest failure rate in the industry.

PERFORMANCE

We deliver a complete range of compact and powerful cooling and heating products that are also intelligent, energy efficient and quiet. And you can control it all with the kumo cloud® app.

PROFESSIONAL INSTALLATION

The best products on the market wouldn't mean much without a trusted base of Diamond Contractors®. When you're ready to learn more about a Mitsubishi Electric Zoned Comfort Solution® simply find one of our certified Diamond Contractors at www.mitsubishicomfort.com.

*For more information, please visit
www.mitsubishicomfort.com, or call 1-800-433-4822.*


*For warranty and registration information,
please visit www.registermehvac.com*

MAKE YOURSELF **COMFORTABLE**



THE PERSONALIZED COMFORT SOLUTION	4
THE FUTURE OF COMFORT TECHNOLOGY	5
ENERGY-EFFICIENT OPERATION	6
HYPER-HEATING INVERTER® TECHNOLOGY	8
CONSTANT COMFORT	9
BREATHE EASY	10
SMART COMFORT TECHNOLOGY	11
3D i-see Sensor™	
Multi-Flow Vane	
UNDERSTANDING YOUR MODEL NUMBER	12
SINGLE-ZONE SYSTEMS	13
MSY (COOLING ONLY)	
MSZ/MUZ-FH	
MSZ/MUZ-GL/D	
MSZ/MUZ-HM	
MSZ-WR	
MSZ-JP	
MFZ-KJ	
SLZ/SUZ	
MLZ/SUZ	
SEZ/SUZ	
PEAD/SUZ	
SVZ	
MULTI-ZONE SYSTEMS	20
MXZ	
GL	
FH	
EF	
KJ	
SVZ	
SEZ	
PEAD	
SLZ MODEL FOUR-WAY CEILING CASSETTE	24
MLZ ONE-WAY CEILING CASSETTE HEAT PUMPS	26
CONTROLLERS	28
kumo cloud®	
MHK1	
Portable Central Controller	
Outside Air Sensor	
Wireless Remote Controller	
Touch MA	
Back-lit MA Remote Controller	
Simple MA Controller	
Thermostat Interface	
BACnet® & MODBUS® Interface	
System Control Interface	
M-SERIES ACCESSORIES	34
SPECIFICATION TABLES	45
ADDITIONAL M-SERIES INFORMATION	72

THE PERSONALIZED COMFORT SOLUTION

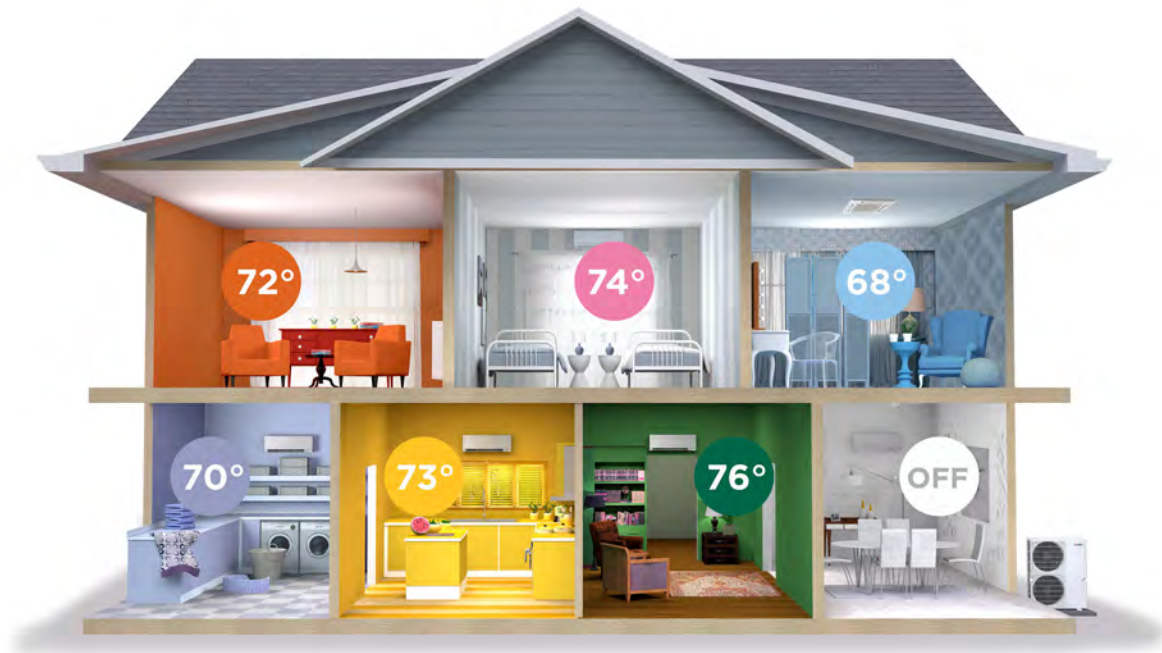

Mitsubishi Electric brings unmatched energy efficiency, performance and control to home cooling and heating. It's never been easier to keep everyone in your house comfortable, without spending a fortune on your energy bills. Mitsubishi Electric Zoned Comfort Solutions® are perfect for any situation, from a hot or cold room to a whole-home renovation. These systems give you more control over the temperatures in your home, and do it better than central air.

- ▶ Up to 40% more efficient than central air
- ▶ Up to 8 individual zones (per system)
- ▶ Improves air quality, reducing dust, mold and allergens
- ▶ Quieter than a human whisper
- ▶ Remote control technology via kumo cloud® app or other smart home-connected devices
- ▶ The #1 selling zoned brand
- ▶ Professional installation
- ▶ Financing available

Learn more about multi-zone and single-zone products in the sections that follow.

THE FUTURE OF COMFORT TECHNOLOGY

Whether it's for that always-stuffy sun room or the entire home, Zoned Comfort Solutions® are the perfect fit.



FEATURES	BENEFITS
INVERTER-DRIVEN COMPRESSORS	Maximizes energy savings by using only the energy needed to perfectly cool or heat an area
EASY INSTALLATION	Installs quickly and easily, without the need for major construction and remodeling
COMPLETE ZONE CONTROL	Realizes maximum control and energy efficiency by cooling and heating only those spaces in use
PERSONAL COMFORT CONTROL	Complete comfort control of temperature, fan speed, and air direction in each room or zone via kumo cloud® or other smart home devices
CLEANER AIR WITH WASHABLE ANTI-ALLERGEN FILTERS	Improves air quality and saves money
HYPER-HEATING INVERTER® (H2i®) HEAT PUMPS	Provides instant warmth even in extreme climates (down to -13° F)
ULTIMATE ENERGY EFFICIENCY	With higher SEER and HSPF ratings

ENERGY-EFFICIENT OPERATION

ENERGY-EFFICIENT AND ENVIRONMENTALLY FRIENDLY

Do you want to live in constant comfort or maintain a reasonable energy bill? You don't have to choose. Zoned Comfort Solutions® utilize green technologies and are up to 40% more efficient than central air. Don't sacrifice comfort over worries about high energy costs.

- ▶ INVERTER-driven compressor technology results in substantial energy and utility savings
- ▶ Zoned control for improved comfort and decreased energy usage
- ▶ Many ENERGY STAR® certified systems
- ▶ SEER ratings as high as 33.1—dramatically better than conventional systems
- ▶ Local and state utility rebates and incentive opportunities
- ▶ 83% of system components are recyclable
- ▶ Washable filters made from natural materials

Let energy rebate programs work for you. Learn more at www.mitsubishicomfort.com and choose the Rebates & Financing tab.

SAVINGS OPPORTUNITIES

Mitsubishi Electric Zoned Comfort Solutions are so energy efficient that a majority of our INVERTER-driven systems have received ENERGY STAR® certification. This can mean big savings. Add in local government and utility rebates, and you have an opportunity to enjoy comfort at substantial savings. These rebates come in many forms, from property and sales tax exemptions to loans and grants. There are thousands of such programs in the U.S., but they are often not widely promoted or publicized. With Mitsubishi Electric, you truly can Make Comfort Personal® (and save some money, too).

For details on qualifying systems, go to www.mitsubishicomfort.com/taxcredit. Visit www.dsireusa.org for information on available local rebate opportunities from state governments or utility companies.

ENERGY STAR® CERTIFIED SYSTEMS

RESIDENTIAL AIR CONDITIONER					
AHRI Reference #	Outdoor	Indoor	EER	SEER	HSPF
201754333	MUY-GL09NA	MSY-GL09NA	15.40	24.60	N/A
201754330	MUY-GL12NA	MSY-GL12NA	13.00	23.10	N/A
201754331	MUY-GL15NA	MSY-GL15NA	13.00	21.60	N/A
201754334	MUY-GL18NA	MSY-GL18NA	13.40	20.50	N/A
201754332	MUY-GL24NA	MSY-GL24NA	12.5	20.5	N/A

ENERGY STAR® CERTIFIED SYSTEMS

RESIDENTIAL HEAT PUMP					
AHRI Reference #	Outdoor	Indoor	EER	SEER	HSPF
201754416	MUFZ-KJ09NAHZ	MFZ-KJ09NA	15.80	28.20	13.00
201754291	MUFZ-KJ12NAHZ	MFZ-KJ12NA	13.60	25.50	12.00
201754292	MUFZ-KJ15NAHZ	MFZ-KJ15NA	13.50	21.80	11.60
201754293	MUFZ-KJ18NAHZ	MFZ-KJ18NA	12.60	21.00	11.30
201754426	MUZ-FH06NA	MSZ-FH06NA**	19.10	33.10	13.50
201754427	MUZ-FH06NAH	MSZ-FH06NA**	19	33.10	12.50
201754296	MUZ-FH09NA	MSZ-FH09NA	16.10	30.50	13.50
201754297	MUZ-FH09NAH	MSZ-FH09NA**	16.10	30.50	12.50
201754298	MUZ-FH12NA	MSZ-FH12NA	13.80	26.10	12.50
201754299	MUZ-FH12NAH	MSZ-FH12NA**	13.80	26.10	11.50
201754300	MUZ-FH15NA	MSZ-FH15NA	12.50	22.00	12.00
201754301	MUZ-FH15NAH	MSZ-FH15NA**	12.50	22.00	11.00
201754302	MUZ-FH18NA2	MSZ-FH18NA**	12.50	21.00	12.00
201754303	MUZ-FH18NAH2	MSZ-FH18NA**	12.50	21.00	11.00
201754648	MUZ-GL09NA	MSZ-GL09NA	15.40	24.60	12.80
201754311	MUZ-GL12NA	MSZ-GL12NA	13.00	23.10	12.50
201754313	MUZ-GL15NA	MSZ-GL15NA	13.00	21.60	11.70
201754315	MUZ-GL18NA	MSZ-GL18NA	13.40	20.50	11.20
201754316	MUZ-GL24NA	MSZ-GL24NA	12.50	20.50	10.00
201754642	MXZ-2C20NA2	Non-ducted Indoor Units	12.70	20.00	10.00
201754925	MXZ-2C20NAHZ2	Non-ducted Indoor Units	13.50	17.00	9.80
201754902	MXZ-3C24NA2	Non-ducted Indoor Units	13.60	20.00	9.80
201754904	MXZ-3C24NAHZ2	Non-ducted Indoor Units	13.50	19.00	10.00
201754908	MXZ-3C30NAHZ2	Non-ducted Indoor Units	12.50	18.00	11.00
201754911	MXZ-4C36NAHZ	Non-ducted Indoor Units	14.00	19.10	11.30
201755020	MXZ-4C36NAHZ	Mixed Ducted and Non-ducted Indoor Units	12.65	17.45	10.70
201754926	MXZ-5C42NAHZ	Non-ducted Indoor Units	13.40	19.00	11.00
201754637	MXZ-8C60NA	Non-ducted Indoor Units	12.5	17.4	10.5
202392018	SUZ-KA09NA2	MLZ-KP09NA	12.6	19.5	13.3
202392021	SUZ-KA09NA2	SLZ-KF09NA	13.4	22.4	12.2
202392027	SUZ-KA09NA2	SEZ-KD09NA4	12.8	18.8	11
202392038	SUZ-KA09NA2	PEAD-A09AA7	12.5	19.7	12.6
202392019	SUZ-KA12NA2	MLZ-KP12NA	12.5	19.8	12.1
202392053	SUZ-KA12NA2	SVZ-KP12NA	12.7	18	12.1
202392022	SUZ-KA12NA2	SLZ-KF12NA	13.3	22	11.4
202392028	SUZ-KA12NA2	SEZ-KD12NA4	12.9	20.5	12.4
202392039	SUZ-KA12NA2	PEAD-A12AA7	12.9	20.5	13
202392029	SUZ-KA15NA2	SEZ-KD15NA4	13	19	11.4
202392040	SUZ-KA15NA2	PEAD-A15AA7	13	19.2	11.6
202392020	SUZ-KA18NA2	MLZ-KP18NA	12.5	22.3	12.4
202392054	SUZ-KA18NA2	SVZ-KP18NA	13.2	18	12.6
202392023	SUZ-KA18NA2	SLZ-KF18NA	12.5	20.7	11.6
202392030	SUZ-KA18NA2	SEZ-KD18NA4	13.7	22	13.1
202392041	SUZ-KA18NA2	PEAD-A18AA7	14.1	19.8	12.9
202392024	SUZ-KA24NA2	SVZ-KP24NA	12.5	18	10.4
202392042	SUZ-KA24NA2	PEAD-A24AA7	12.5	18	11.2
202392025	SUZ-KA30NA2	SVZ-KP30NA	12.5	18	13.6
202392043	SUZ-KA30NA2	PEAD-A30AA7	12.5	18	12.6



Note: List is current as of this printing.

ENERGY STAR® MOST EFFICIENT 2018 (with kumo cloud® controller)

HYPER-HEATING INVERTER® TECHNOLOGY

HEAT...AND LOTS OF IT

Mitsubishi Electric Hyper-Heating INVERTER® systems feature the most advanced heat pump technology for delivering exceptional heating performance. Single-zone and multi-zone systems give you year-round comfort control of one room to every room of the home.

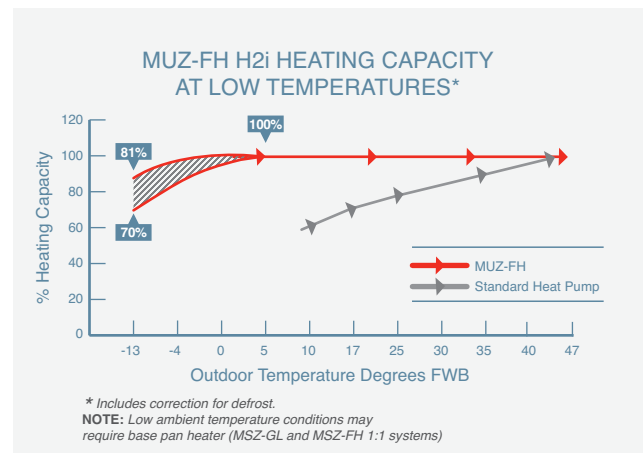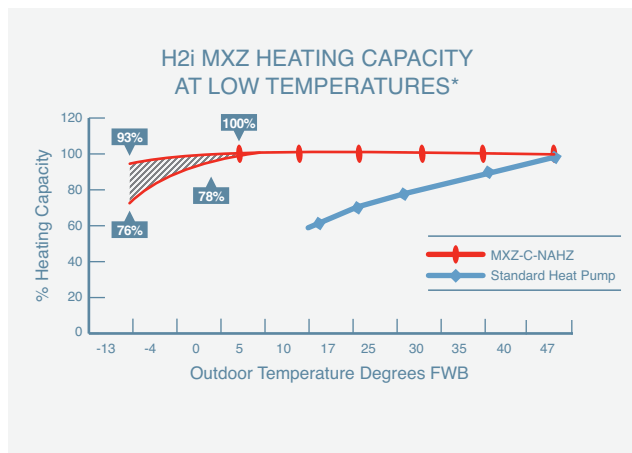

POWERFUL HEAT PUMP

Stay warm even when it's -13° F outdoors. Our units produce up to 100% heating capacity down to 5° F.

YEAR-ROUND COMFORT

When the weather breaks, you'll rest easy knowing that your heating technology is also the most efficient A/C on the market.

HOT-START TECHNOLOGY

Warm your desired comfort zone more quickly, fighting drafts and cold winters.

MINIMAL MAINTENANCE

Thanks to easily accessible filters, little or no ductwork to clean, and simple wiring between the indoor and outdoor units, you'll spend more time enjoying the technology, not fixing it.

QUIETER THAN A HUMAN WHISPER


Do you hear that? No? Mitsubishi Electric Zoned Comfort Solutions® operate at low sound levels. Our indoor units produce decibels barely at the level of a whisper. Compare to other common sounds:



SOURCE: NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH

*SMALLEST TO LARGEST CAPACITY INDOOR UNIT AT LOW SPEED

CONSTANT COMFORT

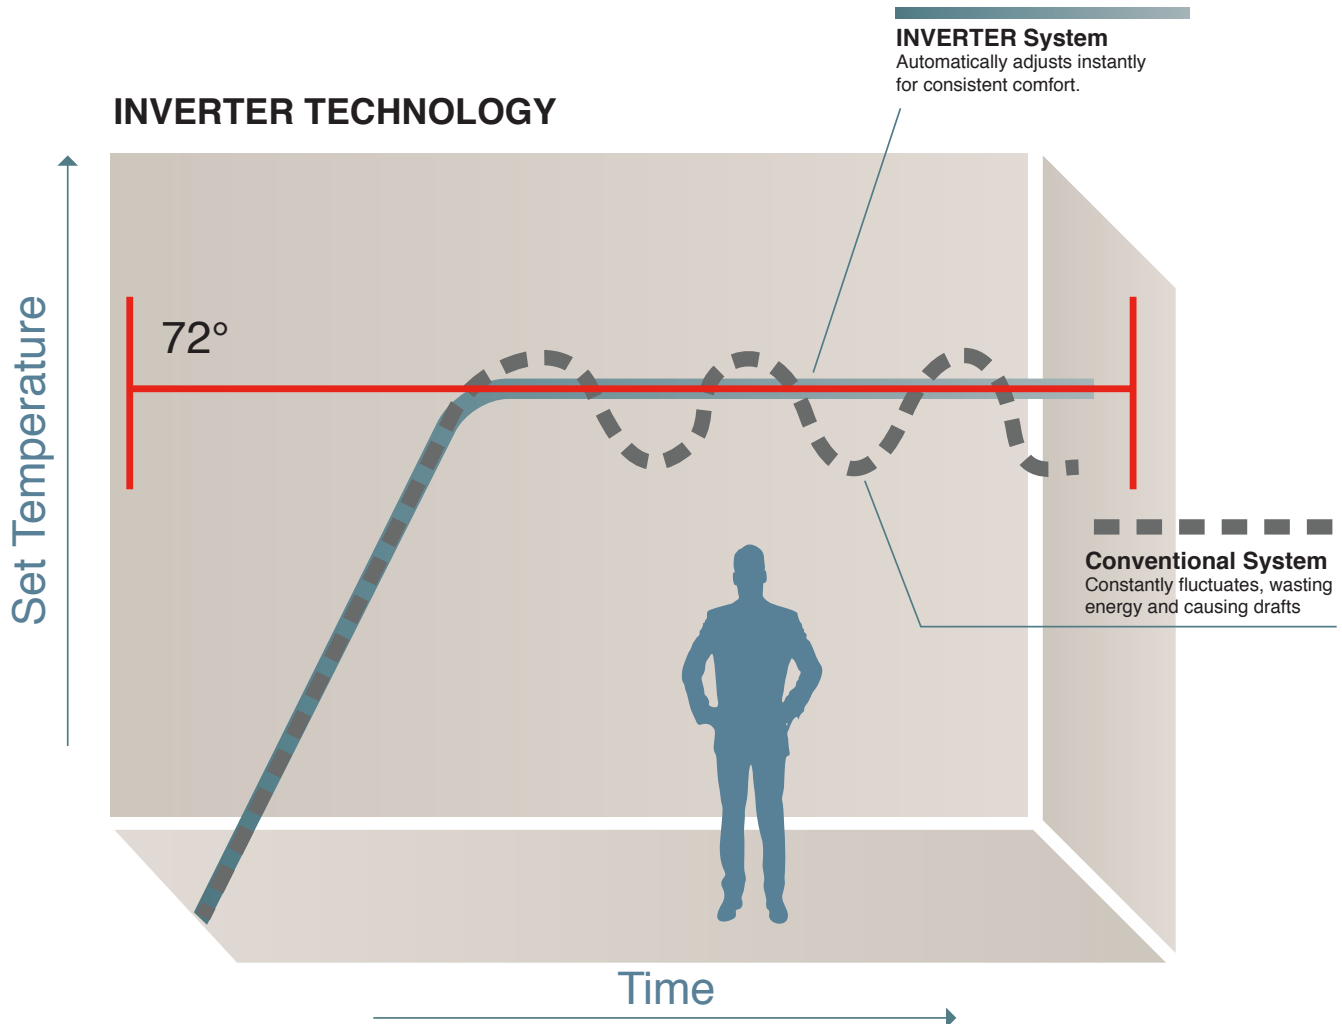

INVERTER

Sophisticated, electronic control systems detect any change in zone temperature and—like a car's cruise control—automatically adjust the speed of the outdoor unit's INVERTER-driven compressor for precise capacity and temperature control. That means you get the temperature you want, all the time.

BREATHE EASY

Zoned Comfort Solutions® use a sophisticated multi-part filtration system to reduce contaminants such as allergens, viruses and bacteria from the air. This combination of filters provides a healthier breathing environment for the home.

1 NANO PLATINUM FILTER

- ▶ Ceramic and platinum nanoparticles are incorporated into the filter material to provide antibacterial and deodorizing characteristics to improve air quality


2 DEODORIZING FILTER

Available on select systems, Platinum Deodorizing filters use nanotechnology to absorb odors to neutralize the worst smells.

- ▶ Periodic cleaning, following the recommended procedures, will maintain filter effectiveness

3 ELECTROSTATIC ANTI-ALLERGEN ENZYME FILTER. AVAILABLE ON MSZ-FH06/09/12/15NA AND MSZ-FH18NA2

- ▶ Reduces germs, bacteria and viruses
- ▶ Helps trap dust, pollens, mites and other particles
- ▶ Utilizes an enzyme catalyst to help break down the sulfur atom bonds in allergen proteins, transforming them into non-allergen proteins, which effectively clean the air (filter should be cleaned regularly to maintain effectiveness)

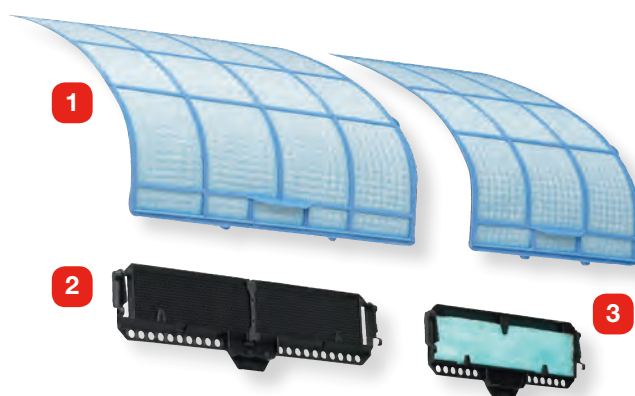

SMART COMFORT TECHNOLOGY

All M-Series systems detect room temperature fluctuations and automatically adjust performance for ultimate comfort in any room.

- ▶ All indoor models feature a return air sensor that constantly monitors and maintains room temperature
- ▶ Continuous fan operation ensures temperature consistency
- ▶ Auto changeover feature automatically switches between cooling and heating modes as needed to maintain a consistent temperature—just set it and forget it (MUZ and SUZ outdoor units)
- ▶ Seven horizontal airflow directions provide 150° of lateral airflow for greater conditioned air circulation (wide vane or swing mode, available on the MSZ/Y-GL24 and MSZ/Y-D30/36NA)

CONSTANT COMFORT WITH 3D I-SEE SENSOR™

Wouldn't it be nice if you had cooling and heating right when you needed it? For select units, the 3D i-see Sensor measures the floor temperature in real time, observing the room vertically for better management of sensible temperature (temperature felt by the occupant). The 3D i-see Sensor measures the infrared rays generated from the surrounding wall and floor surface at an angle of 360°. The infrared ray energy is converted into a temperature value. The 3D i-see Sensor slowly rotates 90° in five-second intervals for correct measurement of temperature to cover the full floor space. When combined with the auto fan speed mode, air can be directed to the farthest corners of the room for enhanced temperature coverage.

- ▶ Measures infrared radiation generated from surrounding walls and surface angles
- ▶ Efficiently adjusts temperatures to ideal comfort levels for occupants

MULTI-FLOW VANE FOR FASTER HEATING

Multi-flow vane technology uses the lower portion of the multi-flow vane to discharge warmed air into the return vent where it is recirculated through the heat exchanger. The rapidly heated air is then released into the room through the top portion of the multi-flow vane. This process significantly reduces the time needed to heat the room, ensuring superior warmth and comfort.



i-see Sensor™
3D




UNDERSTANDING YOUR MODEL NUMBER

The tables below will help you understand Mitsubishi Electric's model naming system so that you and your contractor can make the right product selection for your personal need.

M-SERIES

1. Designed for residential applications.
2. User-friendly, zoned cooling and heating solutions for single- or multi-room applications or the whole home
3. Hyper-Heating INVERTER® (H2i®) outdoor units can provide high heating performance at lower ambient temperatures
4. Many ENERGY STAR® certified models

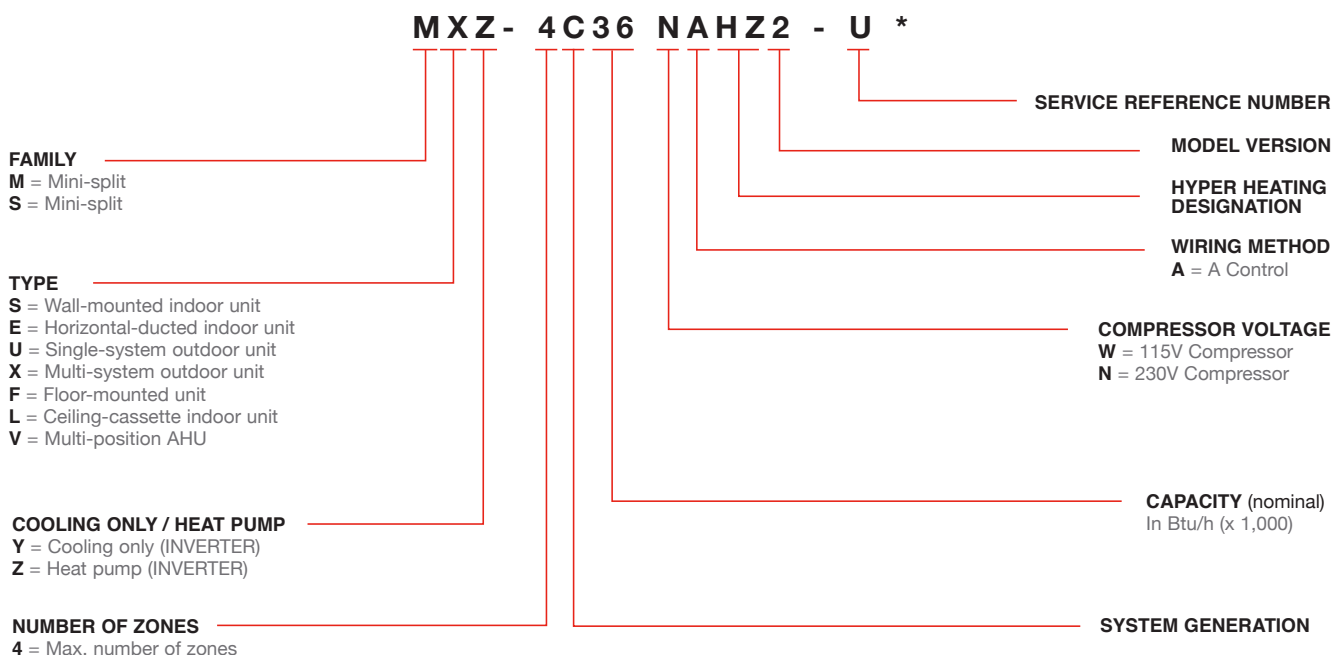

SINGLE-ZONE SYSTEMS

COOLING-ONLY

MSY AIR CONDITIONERS

Mitsubishi Electric offers solutions for every need, including situations where heating is not necessary. The MSY line of air conditioners is ENERGY STAR® certified and offers up to 24.6 SEER.



- ▶ Available capacities in kBtu/h: 09, 12, 15, 18, 24, 30, 36
- ▶ Offers a wide vane for a wider angle of airflow, 150° from left to right
- ▶ Motorized vertical vanes on GL24/D30/D36 models
- ▶ SEER: 15.1 to 24.6
- ▶ Compatible with the MUY outdoor unit



M-Series systems are not recommended for critical room and low ambient cooling applications.
Use professional-grade P-Series with full cooling capacity down to 0° F with wind baffle.

SINGLE-ZONE PRODUCTS

HEATING AND COOLING

WALL-MOUNTED HEAT PUMPS

Slim, wall-mounted indoor units provide zone comfort control. INVERTER-driven compressors and electronic LEVs provide higher efficiency with controlled power usage. The indoor unit is powered by the outdoor unit and should a power outage occur, the system is automatically restored when power returns.



MSZ/MUZ-FH HIGH EFFICIENCY HEAT PUMPS

- ▶ Available capacities in kBtu/h: 06, 09, 12, 15, 18
- ▶ 100% heating at 5° F
- ▶ Industry-leading efficiency of 33.1 SEER (MSZ-FH06NA)
- ▶ Hyper-heating performance down to -13° F outdoor ambient
- ▶ Double-vane air delivery for enhanced circulation
- ▶ 3D i-see Sensor™
- ▶ Infrared human sensing technologies to measure location of human heat signatures
- ▶ Multi-function wireless controller
- ▶ Compatible with kumo cloud® control app and Thermostat Interface



MSZ/MUZ-GL/D HEAT PUMPS

- ▶ Available capacities in kBtu/h: 09, 12, 15, 18, 24, 30, 36
- ▶ 14.5 to 24.6 SEER, 8.2 to 12.8 HSPF, INVERTER-driven compressor
- ▶ Auto restart and auto cooling/heating changeover
- ▶ Vertical air swing on all units
- ▶ Compatible with kumo cloud® control app and Thermostat Interface
- ▶ All GL models ENERGY STAR® certified



MSZ/MUZ-HM PRO LINE HEAT PUMPS

- ▶ Available capacities in kBtu/h: 09, 12, 15, 18, 24
- ▶ Efficiency: 18 SEER/9.5–10.0 HSPF
- ▶ Four fan speeds
- ▶ Anti-mold filter
- ▶ INVERTER-driven heat pump
- ▶ Heating operation range: -4° F to 75° F
- ▶ Cooling operation range: 14° F to 115° F
- ▶ Compatible with kumo cloud® control app and Thermostat Interface

SINGLE-ZONE PRODUCTS

HEATING AND COOLING



MSZ/MUZ-WR HEAT PUMP

- ▶ Available capacities in kBtu/h: 09, 12, 18, 24
- ▶ Efficiency: SEER 16.0 / EER 9.0 / HSPF 8.5
- ▶ Four fan speeds
- ▶ Anti-mold filter
- ▶ INVERTER-driven heat pump
- ▶ Heating operation range: 5° F to 75° F
- ▶ Cooling: 32° F to 115° F
- ▶ Compatible with kumo cloud® control app and Thermostat Interface



MSZ/MUZ-JP 115V HEAT PUMP

- ▶ Available capacities in kBtu/h: 09, 12
- ▶ Efficiency: SEER 17.0 / EER 9.9 to 12.0 / HSPF 8.5
- ▶ Four fan speeds
- ▶ Anti-mold filter
- ▶ INVERTER-driven heat pump
- ▶ Heating operation range: -4° F to 75° F
- ▶ Cooling operation range: 14° F to 115° F
- ▶ Compatible with kumo cloud® control app and Thermostat Interface

SINGLE-ZONE PRODUCTS

HEATING AND COOLING

FLOOR-MOUNTED INDOOR UNITS


These indoor units mount to the floor, or up to 5" above the floor, and have front panel access to the filter for ease of cleaning. They are perfect for difficult areas that may be smaller or don't have usable space on the walls.




MFZ-KJ HEAT PUMPS

- ▶ Available capacities in kBtu/h: 09, 12, 15, 18
- ▶ 21.0 to 28.2 SEER
- ▶ Rapid heating
- ▶ Operates with 25% less power than competing models
- ▶ Recessing is an option


SEER (vs Competitor)

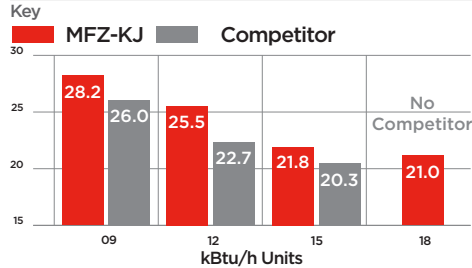


HSPF (vs Competitor)

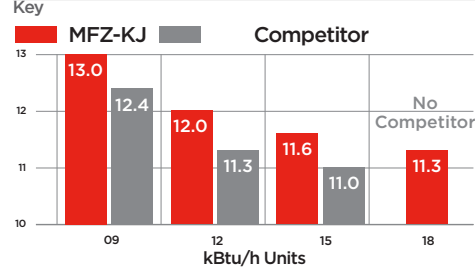

Cooling Airflow Patterns




Heating Airflow Pattern





MFZ-KJ15NA

Competitor

10 minutes on




30 minutes on



60 minutes on



Warm air covers the entirety of the room.



The ground level is left cold.

SINGLE-ZONE PRODUCTS

HEATING AND COOLING

CEILING CASSETTE HEAT PUMPS

SLZ 2'x2' ceiling-recessed cassette units offer a wide airflow pattern for better air distribution in a less obtrusive style. Install SLZ in a hard ceiling (with an access panel for servicing) or in 2'x2' drop ceiling.



SLZ/SUZ HEAT PUMPS

- ▶ Available capacities in kBtu/h: 09, 12, 15, 18
- ▶ 19.8 to 22.4 SEER, 11.2 to 12.2 HSPF, INVERTER-driven compressor
- ▶ Provides cooling and heating in a wide range of capacities
- ▶ Ventilation air knockouts
- ▶ Built-in condensate lift mechanism (up to 33")
- ▶ Multiple airflow adjustments
- ▶ 3D i-See Sensor™
- ▶ Individual vane control



MLZ ONE-WAY CEILING CASSETTE/SUZ HEAT PUMPS

The MLZ one-way cassette can easily be mounted between the joists, making this product ideal for retrofit or new construction projects.

- ▶ Available capacities in kBtu/h: 09, 12, 18
- ▶ 19.5 to 20.3 SEER, 11.9-13.0 HSPF, INVERTER-driven compressor
- ▶ Built-in condensate lift mechanism (19-11/16")
- ▶ Flexible air flow direction: left/right and up/down
- ▶ 4 fan speeds plus auto fan mode

SINGLE-ZONE PRODUCTS

HORIZONTAL-DUCTED HEAT PUMPS

SEZ ducted units provide comfort and efficiency while staying hidden either in the ceiling or beneath the floor.



SEZ/SUZ HEAT PUMPS

- ▶ Available capacities in kBtu/h: 09, 12, 15, 18
- ▶ 18.8 to 22 SEER, 10.8 to 12.6 HSPF, INVERTER-driven compressor
- ▶ Provides cooling and heating in a wide range of capacities
- ▶ Built-in condensate lift mechanism (up to 21-11/16")
- ▶ Static capability up to 0.20 in. wg
- ▶ Optional filter box with MERV-8 filters



PEAD/SUZ HEAT PUMPS

- ▶ Available capacities in kBtu/h: 09, 12, 15, 18, 24, 30, 36
- ▶ 18.6 to 19.4 SEER, 10.9 to 12.1 HSPF, INVERTER-driven compressor
- ▶ Built-in condensate lift mechanism (up to 27-9/16")
- ▶ Static capability up to 0.60 in. wg
- ▶ Optional filter box with MERV-13 filters
- ▶ Interlock with Lossnay®
- ▶ 2-stages of supplemental heat control


SINGLE-ZONE PRODUCTS

HEATING AND COOLING

SVZ DUCTED AIR HANDLER

This air handler is ideal for both system replacement and efficient cooling and heating in ducted applications.

- ▶ Available capacities in kBtu/h: 12, 18, 24, 30, 36
- ▶ Up to 18 SEER
- ▶ Upflow, horizontal left, horizontal right configurations
- ▶ Optional electric heat kits
- ▶ Optional downflow kit
- ▶ Condensation overflow switch connection
- ▶ Humidifier and ERV interface connections
- ▶ Auxiliary heat control connections

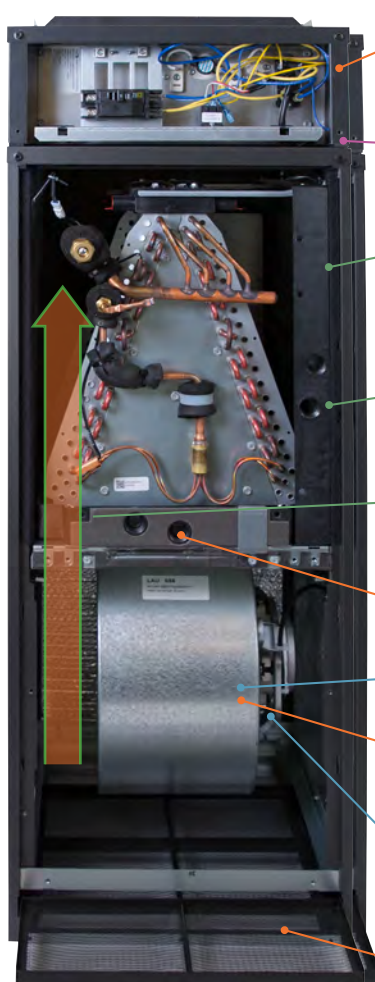

Optional auxiliary heat kit can be mounted on top of the air handler, simplifying field installation



Black ZAM material is highly corrosion-resistant coated steel (zinc, aluminum and magnesium)



1 inch R4.2 fiberglass-free insulation is not compressed and there is no screw penetration through the insulation, resulting in minimal condensation on the exterior



Cabinet air leakage is less than 2.0% at 1.0 in. w.g. (tested in accordance with ASHRAE Standard 193)



Unique blow-through design results in a positive pressure cabinet and allows simple coil cleaning when the blower is removed



No trap required for drain



Forward curved blower ensures quiet operation



Selectable external static pressure: 0.30, 0.50 and 0.80 in w.g., with three fan speeds at each static setting



Highly efficient, totally enclosed EC motor positioned to prevent sound from traveling through the ductwork



Washable, standard-sized filter

MULTI-ZONE SYSTEMS

MXZ OUTDOOR UNITS

With the MXZ-C multi-zone standard and H2i® systems, you can enjoy ideal levels of comfort in the rooms you use most while reducing energy costs. Each zone operates independently. People in different rooms—like the kitchen, master bedroom or living room—can set temperatures for personalized comfort.

THE MULTI-ZONE SYSTEMS INCLUDE

- ▶ Mix and match flexibility of indoor unit styles and combinations
- ▶ A wide range of indoor unit capacities that match the room size and requirements
- ▶ Flexible options to tackle the most challenging multi-room installations
- ▶ High-efficiency, multiple ENERGY STAR® combinations
- ▶ Four- and five-ton outdoor unit can support up to eight indoor units using branch boxes
- ▶ New five-ton outdoor unit for large residential home applications
- ▶ Auto restart following a power outage
- ▶ Self-check function offering integrated diagnostics



MXZ AND INDOOR UNIT COMPATIBILITY CHART

MULTI-ZONE OUTDOOR UNIT		BRANCH BOX	SVZ	MSZ-GL	MFZ-KJ	MSZ-EF9, 12, 15, 18	MSZ-FH	SEZ-KD	MLZ	SLZ	PCA	PLA	PEAD*
			12, 18, 24, 30, 36	6, 9, 12, 15, 18, 24	9, 12, 15, 18	9, 12, 15, 18	6, 9, 12, 15, 18	9, 12, 15, 18	9, 12, 18	9, 12, 15, 18	24, 30, 36, 42	12, 18, 24, 30, 36, 42	9, 12, 15, 18, 24, 30, 36, 42
HYPER-HEATING EQUIPMENT	MXZ-2C20NAHZ2		12 ✓	6, 9, 12, 15 ✓	9, 12, 15 ✓	9, 12, 15 ✓	6, 9, 12, 15 ✓	9, 12, 15 ✓	9, 12 ✓	9, 12 ✓			9, 12, 15 ✓
	MXZ-3C24NAHZ2		12, 18 ✓	6, 9, 12, 15, 18 ✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		18 ✓	9, 12, 15, 18 ✓
	MXZ-3C30NAHZ2		12, 18, 24 ✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓	24 ✓	18 ✓	9, 12, 15, 18, 24 ✓
	MXZ-4C36NAHZ	✓	12, 18, 24 ✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		12, 18, 24, 30, 36 ✓	9, 15, 12, 18, 24, 30, 36 ✓
	MXZ-5C42NAHZ	✓	12, 18, 24 ✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		12, 18, 24, 30, 36 ✓	9, 15, 12, 18, 24, 30, 36 ✓
	MXZ-8C48NAHZ	✓	✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		12, 18, 24, 30, 36 ✓	9, 15, 12, 18, 24, 30, 36 ✓
STANDARD EQUIPMENT	MXZ-2C20NA2		12 ✓	6, 9, 12, 15 ✓	9, 12, 15 ✓	9, 12, 15 ✓	6, 9, 12, 15 ✓	9, 12, 15 ✓	9, 12 ✓	9, 12 ✓			9, 12, 15 ✓
	MXZ-3C24NA2		12, 15 ✓	6, 9, 12, 15, 18 ✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		18 ✓	9, 12, 15, 18 ✓
	MXZ-3C30NA2		12, 18, 24 ✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓	24 ✓	18 ✓	9, 12, 15, 18, 24 ✓
	MXZ-4C36NA2		✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓	24 ✓	18 ✓	9, 12, 15, 18, 24 ✓
	MXZ-5C42NA2		✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓	24 ✓	18 ✓	9, 12, 15, 18, 24 ✓
	MXZ-8C48NA	✓	✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		12, 18, 24, 30, 36 ✓	9, 15, 12, 18, 24, 30, 36 ✓
	MXZ-8C60NA	✓	✓	✓	✓	✓	✓	✓	✓	9, 12, 15 ✓		12, 18, 24, 30, 36 ✓	9, 15, 12, 18, 24, 30, 36 ✓

✓ COMPATIBLE

*Please refer to the installation manual and full compatibility chart for restrictions on the maximum number of indoor units that can be connected for ducted air handlers.

Information is current as of this printing. Minimum installed capacity cannot be less than 12,000 Btu/h.

**A minimum of two indoor units must be connected to all MXZ-C outdoor units.
Minimum installed capacity cannot be less than 12,000 Btu/h.**

MULTI-ZONE SYSTEMS

INDOOR UNITS FOR MULTI-ZONE SYSTEMS (MXZ-C COMPATIBLE)

MSZ-GL HEAT PUMPS

Our standard wall-mounted units, the GL series offers a slim profile and provides enhanced, industry-leading performance for the multi-zone product category. With washable long-life filters, features such as auto-restart and compatibility with the kumo cloud® app, you'll experience comfort as you never have before. And all models are ENERGY STAR® certified, helping to save you money on your energy bills.

- ▶ Available capacities in kBtu/h: 6, 9, 12, 15, 18, 24
- ▶ Whisper-quiet operation
- ▶ Also available for single-zone application



MSZ-FH HIGH-EFFICIENCY HEAT PUMPS

Let the FH line of wall-mounted units create personalized home comfort at its absolute best. The FH features industry-leading efficiency and triple-action filtration for a healthier home. The 3D i-see Sensor™ uses infrared technology to sense your heat signature, directing cool and warm air where it's needed most, and helping to save you even more on your energy bills. Control all of these great features with the kumo cloud® app for the ultimate in home comfort.

- ▶ Available capacities in kBtu/h: 6, 9, 12, 15, 18
- ▶ Double-vane air delivery for enhanced circulation
- ▶ Optional Thermostat Interface (PAC-US444CN-1) to allow for operation with third-party thermostats
- ▶ Whisper-quiet operation
- ▶ Also available for single-zone application



MULTI-ZONE SYSTEMS

INDOOR UNITS FOR MULTI-ZONE SYSTEMS (MXZ-C COMPATIBLE)

MSZ-EF DESIGNER HEAT PUMPS

The MSZ-EF Designer Series wall-mounted units combine the ultimate in aesthetic standards with the most innovative cooling and heating technology. Available in four capacities, they are perfect for almost any size room. The three available model colors and sleek design allow seamless integration into interior architecture and décor. Their whisper-quiet operation enables the units to be used in noise-sensitive residential properties and work spaces as well. And, last but not least, the environment can breathe a sigh of relief: these Designer Series wall-mounted units, as part of a Zoned Comfort Solution®, are extremely energy efficient.



- ▶ Available capacities in kBtu/h: 9, 12, 15, 18
- ▶ Three colors to choose from: glossy white, matte silver and glossy black

MFZ-KJ FLOOR-MOUNTED HEAT PUMPS

The MFZ-KJ floor-mounted unit features a contemporary slimline design and dramatically reduced depth while introducing a significant innovation in multi-flow vane technology that contributes to a faster heating process. This technology efficiently recirculates air to quickly raise room temperature during the cooler months of the year. MFZ-KJ floor-mounted units are the perfect solution for unobtrusive heating or cooling at floor level. New advanced technology offers heating performance during low temperatures in the shortest amount of time (and with more even heat distribution), all while maintaining maximum energy efficiency.



- ▶ Available capacities in kBtu/h: 9, 12, 15, 18
- ▶ Hot-start technology
- ▶ Whisper-quiet operation

MULTI-ZONE SYSTEMS

INDOOR UNITS FOR MULTI-ZONE SYSTEMS (MXZ-C COMPATIBLE)

SVZ DUCTED AIR HANDLER

This air handler is ideal for both system replacement and efficient cooling and heating in ducted applications.

- ▶ Available capacities in kBtu/h: 12, 18, 24, 30, 36
- ▶ Upflow, horizontal left, horizontal right configurations
- ▶ Optional electric heat kits
- ▶ Condensation overflow switch connection
- ▶ Humidifier and ERV interface connections
- ▶ Auxiliary heat control connections



SEZ HORIZONTAL-DUCTED HEAT PUMPS

SEZ ducted units provide comfort and efficiency while staying hidden either in the ceiling or beneath the floor and work well with existing ductwork

- ▶ Available capacities in kBtu/h: 9, 12, 15, 18
- ▶ Built-in condensate lift mechanism (up to 21-11/16")
- ▶ Also available for single-zone application



PEAD HORIZONTAL-DUCTED HEAT PUMPS

- ▶ Available capacities in kBtu/h: 9, 12, 15, 18, 20, 24, 30, 36
- ▶ INVERTER-driven compressor
- ▶ Built-in condensate lift mechanism (up to 27-9/16")
- ▶ Static capability up to 0.60 in. wg
- ▶ Option filter box with MERV-13 filters
- ▶ Interlock with Lossnay®
- ▶ 2-stages of supplemental heat control



Select PLA and PCA models are also compatible with select multi-zone MXZ-C systems.
For full MXZ-C combinations list, visit www.mitsubishicomfort.com/products/outdoor-units/multi-zone-cooling-and-heating/compare

MULTI-ZONE SYSTEMS

INDOOR UNITS FOR MULTI-ZONE SYSTEMS (MXZ-C COMPATIBLE) SLZ MODEL FOUR-WAY CEILING CASSETTE

New SLZ ceiling-recessed cassette new design easy to install enables fitting into narrow ciling space.

- ▶ Available capacities in kBTu/h: 9, 12, 15, 18
- ▶ Energy savings Performance
- ▶ Easy installation
- ▶ Quietness
- ▶ New Design


Temporary Hanging Hook

The structure of the panel has been revised and is now equipped with a temporary Hanging Hook. This has improved work efficiency during temporary panel installation



MULTI-ZONE SYSTEMS


3D i-see Sensor™

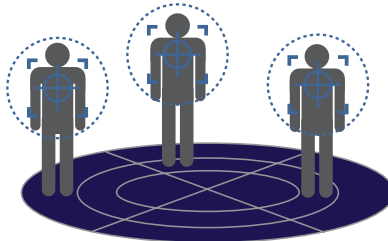

- 3D i-see Sensor™ detects the number of people in the room and sets temperature accordingly
- Automatic power-saving operation
- Enhanced power-saving mode



Four-way Vane Control

- Two-way, three-way and four-way airflow pattern selection
- Direct/Indirect airflow
- Seasonal airflow mode

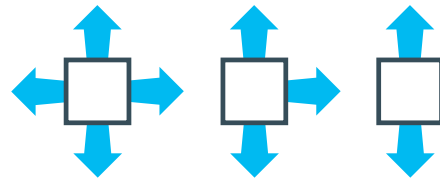

Quietness

The sound level has been reduced by 2-4dB thanks to the introduction of a 3D turbo fan, for quieter and more comfortable air conditioning. temporary panel installation

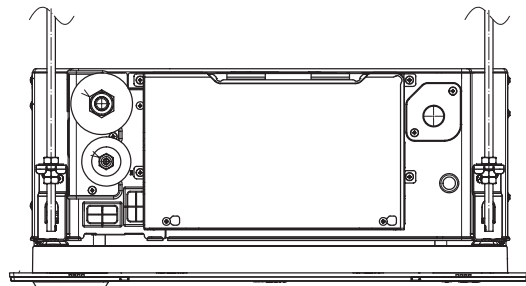

- Lowest profile 9-5/8" height above ceiling
- Panel size reduced:
W x D: 25 -9/16" (650mm) x 25 9/16" (650mm)
W x D: 24-5/8" (625mm) x 24-5/8" (625mm)

MULTI-ZONE SYSTEMS


INDOOR UNITS FOR MULTI-ZONE SYSTEMS (MXZ-C COMPATIBLE)

MLZ ONE-WAY CEILING CASSETTE HEAT PUMPS

The MLZ one-way cassette can easily be mounted between the joists, making this product ideal for retrofit or new construction projects.

- ▶ Built-in condensate lift mechanism (19-11/16")
- ▶ Available capacities in kBtu/h: 09, 12, 18
- ▶ Flexible air flow direction: left/right and up/down
- ▶ 4 fan speeds plus auto fan mode


Interior pocket to hold Wireless Interface for kumo cloud® app.

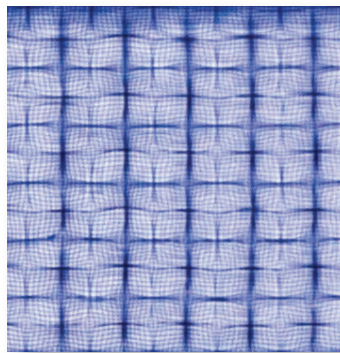

Washable antibacterial and deodorizing filter. 3D surface provides better dust collection.

Optional silver-iodized air purifier filter available (MAC-408FT-E). This filter captures and neutralizes bacteria, pollen and other airborne allergens.

MULTI-ZONE SYSTEMS

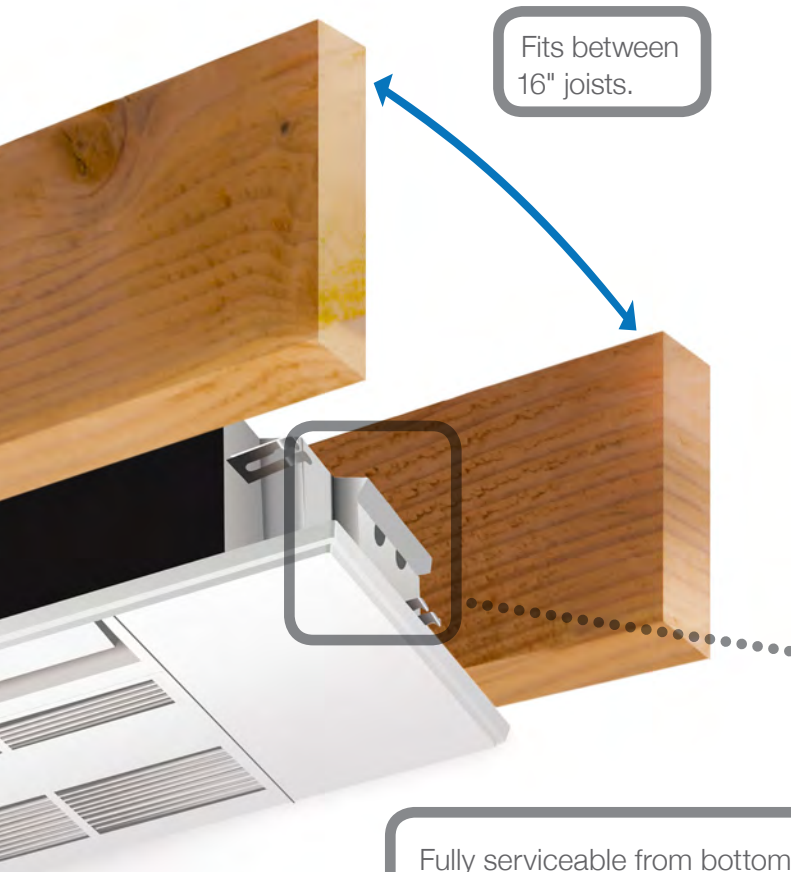

MANAGE YOUR COMFORT FROM ANYWHERE WITH kumo cloud



PAC-USWHS002-WF-2

Apple and the App Store are registered trademarks of Apple, Inc.
Amazon, Alexa, Fire and all related logos are trademarks of Amazon.com, Inc. or its affiliates.
Google play is a registered trademark of Google, Inc.

Did you forget to turn off your unit before leaving for vacation? You don't have a worry in the world when you have the kumo cloud app. You can change temperatures, set and store a schedule, and much more from anywhere. It really is comfort made personal.

Anytime, Anywhere Control

kumo cloud gives you the ability to effortlessly control your home's comfort. Whether you're out for the day or the month, looking to cool down or warm up, kumo cloud gives you control from any smart phone, tablet or web browser.

Program and Schedules

kumo cloud walks you through a five-step process to easily schedule the mode, set temperature and fan speed, for an individual zone or several zones at once.

Easily Zoned

Once your Wireless Interface is installed on your indoor unit by a trained HVAC professional, the indoor unit will discover the app. Name your indoor units, create groups, and organize multiple properties from one user-friendly app. A trained HVAC professional installs a Wireless Interface for each indoor unit.

Check Filter Status

You never have to manually check a filter again. kumo cloud can tell you the status of any filter in your system at any time.

SPECIFICATIONS AND REQUIREMENTS

- ▶ Now compatible with M-Series, P-Series and CITY MULTI® systems
- ▶ kumo cloud allows for a Mitsubishi Electric indoor unit to be controlled remotely or locally with the app and web service
- ▶ For product information go to kumocloud.com
- ▶ Ability to group units and organize groups into sites
- ▶ Batch command units
- ▶ Ability to program events and scheduling into the unit itself
- ▶ Available in Fahrenheit or Celsius
- ▶ Easy to connect the device to your router using the kumo cloud app
- ▶ Each indoor unit must be equipped with a Mitsubishi Electric Wireless Interface (PAC-USWHS002-WF-1) installed by a licensed contractor
- ▶ Secure boot to prevent unauthorized reprogramming of Wireless Interface
- ▶ Intuitive initial settings feature for M- & P-Series equipment

CONTROLLERS

Mitsubishi Electric offers a wide variety of options when it comes to controlling your comfort. Whatever your need, we have the solution to effortlessly adjust your Zoned Comfort Solutions®.

MHK1 WIRELESS REMOTE CONTROLLER KIT

With the MHK1 Wireless Remote Controller Kit, comfort control has never been easier. It installs anywhere with a simple wall-mounted design, and its large, back-lit screen makes it very easy to read. Operation modes include cool, drying, auto, heat, and fan. Optimal start eliminates the guesswork when setting a schedule. This function allows the remote controller to “learn” how long your Zoned Comfort Solution takes to reach the programmed temperature setting, so the temperature is reached at the time you set.

The basic MHK1 Wireless Remote Controller Kit includes a Wireless Wall-mounted Remote Controller and a Wireless Receiver located with the indoor wall or ceiling-mounted unit. You may choose to enhance your control convenience and flexibility with an optional Portable Central Controller and Outside Air Sensor.



PORTABLE CENTRAL CONTROLLER

When paired with the MHK1 Wall-Mounted Controller, the Portable Central Controller (MCCH1) can monitor and control on/off mode and set your desired temperature. It also has scheduled override capability and displays outside air temperature and humidity when paired with the outside air sensor.



OUTSIDE AIR SENSOR

The Outside Air Sensor (MOS1) monitors outdoor air temperature and humidity and conveniently displays that information on the Portable Central Controller and the wall-mounted controller.



WIRELESS REMOTE CONTROLLER

- ▶ **MODE:** HEAT, COOL, AUTO, and DRY
- ▶ **FAN:** Adjusts fan speed
- ▶ **STOP/START:** A 24-hour ON/OFF timer
- ▶ **VANE:** Sets horizontal vane position
- ▶ **TIME:** Power off timer and clock adjustment
- ▶ Included with M-Series wall-mounted and floor-mounted systems
- ▶ Optional wall-mounted wireless, fully functional (MHK1) and wall-mounted wired controllers are available. (PAR-33MAA & PAC-YT53CRAU require a MAC-333IF-E interface for MSZ/Y and MFZ indoor units)



ADDITIONAL FEATURES AVAILABLE ON CERTAIN MODELS

- ▶ “Powerful Mode” function permits system to temporarily run at a lower/higher temperature with an increased fan speed, which quickly brings the room to the optimum comfort level
- ▶ Wide Vane setting provides a wider horizontal air distribution on select models with wider cabinets
- ▶ Features vary by indoor model

CONTROLLERS

PAR-CT01MAU-SB TOUCH MA REMOTE CONTROLLER

- ▶ User-friendly, customizable full color touch panel display
- ▶ Ability to add a custom logo on the display
- ▶ Large icons with 180 color patterns
- ▶ Daily and weekly timers
- ▶ Password protected
- ▶ Requires MAC-333IF-E for use with M-Series products
- ▶ The MELRemo app and Bluetooth® Low Energy (BLE) technology supports communication with smartphones or tablets in multiple languages.



PAR-33MAA BACK-LIT MA REMOTE CONTROLLER

- ▶ Room Temperature: displays room temperature sensed either at the indoor unit (default) or at the remote controller
- ▶ Set temperature range limit: from the Back-lit MA Controller, the set temperature range can be reduced for cool and heat modes
- ▶ Dimensions: 4-3/4" (w) x 3/4" (d) x 4-3/4" (h) (120 x 19 x 120mm)
- ▶ Requires MAC-333IF-E to use with M-Series. (refer to compatibility table for details)
- ▶ Setting screen for i-see Sensor™ 3D, draft reduction mode



PAC-YT53CRAU SIMPLE MA CONTROLLER

- ▶ Controls group operation for up to 16 indoor units in a single group
- ▶ Set temperature range limit: simple MA-allowable set temperature range can be reduced for cool and heat modes
- ▶ Room temperature can be sensed either at the indoor unit (default) or at the Simple MA Controller
- ▶ Dimensions: 2-3/4" (w) x 9/16" (d) x 4-3/4" (h) (70 x 14.5 x 120 mm)
- ▶ Requires MAC-333IF-E to use with M-Series



PAC-US444CN-1 THERMOSTAT INTERFACE

- ▶ Control your Zoned Comfort Solution using a third-party 24VAC transformer
- ▶ Wires back to the indoor unit using CN105 to replace the return air temperature sensor
- ▶ Maximum wiring length: 39' (12 m)
- ▶ Dimensions: 3.17 in (w) x 3.96 in (h) x 0.93 in (d) (80.6 x 100.6 x 23.7 mm)
- ▶ Exterior shell made of ABS resin
- ▶ Environment Conditions — operating temperature range: Installation manual states that the temperature should be between 32° F and 104° F (0° C to 40° C)



PAC-UKPRC001-CN-1 BACNET® & MODBUS® INTERFACE

- ▶ Allows for a third-party Building Energy Management System (BEMS) to control a Mitsubishi Electric Cooling & Heating City Multi, M-Series or P-Series indoor unit
- ▶ Monitor and control one indoor unit with one BACnet & Modbus Interface
- ▶ Small, compact design
- ▶ Works with Mitsubishi Electric Cooling & Heating centralized and remote controllers
- ▶ Does not work with MHK1, Thermostat Interface or Wireless Interface
- ▶ Home/Commercial automation systems



MAC-333IF-E SYSTEM CONTROL INTERFACE

- ▶ Allows M-Series indoor units to communicate with the CITY MULTI® Controls Network via M-Net
- ▶ Provides an input to allow remote On/Off control of indoor unit
- ▶ Allows M-Series indoor units to connect to MHK1 Wall-Mounted Wireless Controller when using other MAC-333IF-E functions
- ▶ Allows M-Series indoor units to connect to a MA controller
- ▶ Power: 12V DC (supplied from indoor unit)



M-SERIES ACCESSORIES

BASE PAN HEATERS

In colder climates where outdoor temperatures can drop to below freezing for longer than 72 hours straight, a base pan heater is a great way to limit ice buildup. Base pan heaters prevent freezing before water drains from the base pan.



- ▶ Heater is energized below 36° F
- ▶ Prevents ice from building up on the outdoor unit base when operating in heating mode for an extended period of time in a very low temperature, high humidity condition
- ▶ Controlled by outdoor unit

DRAIN PAN LEVEL SENSOR

The DPLS2 Diamondback™ Drain Pan condensate control sensor shuts down your Zoned Comfort Solutions® if high condensate levels are detected in the drain pan, preventing possible leaks and damage.

- ▶ Meets the intent of International Mechanical Code “allowed exception to the secondary drain pan” requirement
- ▶ All solid state—no floats or other moving parts—draws power from indoor unit
- ▶ Compact size with no additional energy consumption



QUICKSLING STANDS AND BRACKETS

Strong and reliable mini-split stands are the mount of choice for M-Series outdoor units.


- ▶ Quick and easy to assemble
- ▶ Manufactured with heavy gauge steel
- ▶ Color-matched with thermally fused powder coat finish



FILTER BOXES

Improve the air quality in your home with FB series filter boxes for the SEZ line of horizontal ducted units.

- ▶ FBL1 filter boxes include 1" thick, pleated MERV 8 filter(s) installed
- ▶ Tested in accordance with ANSI/ASHRAE Standard 52.2 and Rated Class 2 under U.L. Standard 900
- ▶ Screw-through design for easy mounting to an indoor unit
- ▶ Dimensions: 15-3/4" (l) x 3-1/4" (w) x 3-1/4" (h)

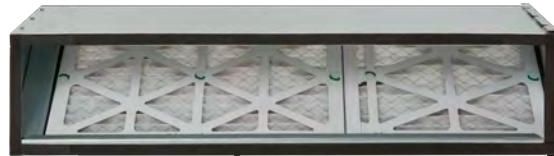

- Meets UL94v-0 for interior applications
- Has snap-on covers and a full selection of couplings, elbows, T-joints, caps, and more for any application: complex or simple
- Offers high-quality PVC with UV inhibitors for outdoor service in all weather conditions
- Can be painted with most house paints to match exterior decors
- Is not just for HVAC—Hides any exterior cabling, piping, or wiring
- Is available in four sizes: 3", 4", and 6" tubes
- One-year warranty

Download a brochure at www.line-hide.com to find out more information.

For a complete list of accessories, please visit www.mitsubishicomfort.com

M-SERIES ACCESSORIES

SERIES NAME			INDOOR UNIT					
			MSY-GL 6, 9, 12, 15, 18, 24	MSY-D 30, 36	MSZ-FH 6, 9, 12, 15, 18	MSZ-GL 6, 9, 12, 15, 18, 24	MSZ-D 30, 36	
FILTER	DEODORIZING FILTER	MAC-3000FT-E			✓			
	ANTI-ALLERGY ENZYME FILTER	MAC-408FT-E	✓			✓		
	ANTI-ALLERGY ENZYME FILTER	MAC-1415FT-E		✓			✓	
	ELECTROSTATIC ANTI-ALLERGY ENZYME FILTER	MAC-2330FT-E			✓			
	ELECTROSTATIC ANTI-ALLERGY ENZYME FILTER	MAC-2320FT-E						
	ELECTROSTATIC ANTI-ALLERGY ENZYME FILTER	MAC-2310FT-E	24 ✓			24 ✓		
FILTER BOX	FILTER BOX WITH MERV 8 FILTERS	FBL 1-1						
	FILTER BOX WITH MERV 8 FILTERS	FBL 1-2						
	FILTER BOX WITH MERV 8 FILTERS	FBL 1-3						
	FILTER BOX WITH MERV 13 FILTERS	FBM2-2						
	FILTER BOX WITH MERV 13 FILTERS	FBM2-3						
	FILTER BOX WITH MERV 13 FILTERS	FBM2-4						
WIRELESS SIGNAL RECEIVER	WIRELESS SIGNAL RECEIVER	PAR-SA9CA-E						
	WIRELESS SIGNAL RECEIVER	PAR-FA32MA-W						
	WIRELESS SIGNAL RECEIVER	PAR-FA32MA-E						
	WIRELESS REMOTE RECEIVER PANEL	PAR-SF9FA-E						
WIRELESS REMOTE CONTROLLER	WIRELESS REMOTE CONTROLLER	PAR-SL100A-E						
	WIRELESS REMOTE CONTROLLER	PAR-FL32MA-E				✓		
	BACKLIT, WALL-MOUNTED, WIRELESS CONTROLLER	MHK1	✓	✓	✓	✓	✓	
	PORTABLE CENTRAL CONTROLLER	MCCH1	✓	✓	✓	✓	✓	
WIRED REMOTE CONTROLLER	WIRED MA CONTROLLER ¹	PAR-33MAA	✓	✓	✓	✓	✓	
	SIMPLE MA CONTROLLER ¹	PAC-YT53CRAU	✓	✓	✓	✓	✓	
	TOUCH MA CONTROLLER ¹	PAR-CT01MAU-SB	✓	✓	✓	✓	✓	
	AIRZONE ZBS WIRED BLUEFACE PRINCIPAL CONTROLLER WHITE	AZZBSBLUEFACECB						
	AIRZONE ZBS WIRED THINK CONTROLLER WHITE	AZZBSTHINKCB						
	AIRZONE ZBS WIRELESS THINK CONTROLLER WHITE	AZZBSTHINKRB						
	AIRZONE ZBS WIRED LITE CONTROLLER WHITE	AZZBSLITECB						
	AIRZONE ZBS WIRELESS LITE CONTROLLER WHITE	AZZBSLITERB						
REMOTE SENSOR	WIRED REMOTE SENSOR	PAC-SE41TS-E	✓	✓	✓	✓	✓	
	WIRED REMOTE SENSOR	M21-EAA-307	✓	✓	✓	✓	✓	
	WIRELESS TEMPERATURE AND HUMIDITY SENSOR	PAC-USWHS003-TH-1	✓	✓	✓	✓	✓	
	OUTSIDE AIR SENSOR FOR MHK1	MOS1	✓	✓	✓	✓	✓	
	FLUSH MOUNT REMOTE TEMPERATURE SENSOR	PAC-USSEN001-FM-1						
INTERFACE	SYSTEM CONTROL INTERFACE ²	MAC-333IF-E	✓	✓	✓	✓	✓	
	WIRELESS INTERFACE	PAC-USWHS002-WF-2	✓	✓	✓	✓	✓	
	THERMOSTAT INTERFACE	PAC-US444CN-1	✓	✓	✓	✓	✓	
	KUMO STATION ¹	PAC-WHS01HC-E	✓	✓	✓	✓	✓	
	USNAP INTERFACE	PAC-WHS01UP-E	✓	✓	✓	✓	✓	
	IT EXTENDER	PAC-WHS01IE-E	✓	✓	✓	✓	✓	
	BACNET [®] AND MODBUS [®] INTERFACE	PAC-UKPRC001-CN-1	✓	✓	✓	✓	✓	

✓ COMPATIBLE

¹ MSY-D/GL: MSZ-FH/GL/D/HM/EF/JP/WR; MFZ AND MLZ INDOOR UNITS REQUIRES MAC-333IF-E

² ALLOWS MSY-D/GL: MSZ-FH/GL/D/HM/EF/JP/WR; MFZ AND MLZ INDOOR UNITS TO CONNECT TO AN MA CONTROLLER

M-SERIES ACCESSORIES

	MSZ-JP 9, 12	MSZ-HM 6, 9, 12, 15, 18, 24	MSZ-WR 9, 12, 18, 24	MSZ-EF 9, 12, 15, 18	MFZ-KJ 9, 12, 15, 18	MLZ 9, 12, 18	SLZ-KF 9, 12, 15	SEZ-KD 9, 12, 15, 18	SVZ 12, 18, 24, 30, 36	PEAD 9, 12, 15, 18, 24, 30, 36, 42
	✓	✓	✓		✓	✓				
				✓						
								9 ✓		
								12, 15 ✓		
								18 ✓		
										9, 12, 15, 18 ✓
										24, 30 ✓
										36, 42 ✓
								✓		
							✓	✓	✓	✓
							✓	✓	✓	✓
							✓			
							✓			
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
									✓	✓
									✓	✓
									✓	✓
									✓	✓
									✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓				
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
							✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

M-SERIES ACCESSORIES

SERIES NAME			INDOOR UNIT					
			MSY-GL 6, 9, 12, 15, 18, 24	MSY-D 30, 36	MSZ-FH 6, 9, 12, 15, 18	MSZ-GL 6, 9, 12, 15, 18, 24	MSZ-D 30, 36	
CONNECTOR	EXTERNAL FAN / HEATER CONTROL RELAY ADAPTER	CN24RELAY-KIT-CM3			✓			
	WIRE FOR REMOTE ON/OFF WITH CN32 CONNECTOR	PAC-715AD						
	CONNECTOR AND WIRE FOR OPERATION STATUS/ERROR USING CN51	PAC-725AD						
	CONNECTOR CABLE FOR REMOTE DISPLAY	PAC-SA88HA-EP						
	CONNECTOR FOR CN32 (REMOTE ON/OFF)	PAC-SE55RA-E						
	LOCKDOWN BRACKET FOR HAND-HELD REMOTE CONTROLLERS	RCMKP1CB	✓	✓	✓	✓	✓	
	REMOTE OPERATION ADAPTER*	PAC-SF40RM-E						
GRILLE	GRILLE (REQUIRED)	MLP-444W						
	GRILLE (REQUIRED)	SLP-18FAU						
BOTTOM RE-TURN PLATE	(CONVERTS LOW-PROFILE DUCTED INDOOR UNIT FROM REAR RETURN TO BOTTOM RETURN)	BRP-1						
		BRP-2						
		BRP-3						
CONDENSATE	BLUE DIAMOND SENSOR EXTENSION CABLE – 15 FT.	C13-103	✓	✓	✓	✓	✓	
	BLUE DIAMOND ALARM EXTENSION CABLE – 6.5 FT.	C13-192	✓	✓	✓	✓	✓	
	BLUE DIAMOND MULTITANK – COLLECTION TANK FOR USE WITH MULTIPLE PUMPS	C21-014	✓	✓	✓	✓	✓	
	BLUE DIAMOND RUBBER FOOT PADS	F10-010	✓	✓	✓	✓	✓	
	MINI CONDENSATE PUMP – 230 VOLT APPLICATION	SI30-230	✓	✓	✓	✓	✓	
	MEGABLUE ADVANCED BLUE DIAMOND CONDENSATE PUMP W/ RESERVOIR & SENSOR	X87-835 - 110 TO 250V	✓	✓	✓	✓	✓	
	MAXIBLUE ADVANCED BLUE DIAMOND MINI CONDENSATE PUMP W/ RESERVOIR & SENSOR (110V) UP TO 48,000 BTU/H [RECOMMENDED]	X87-711 - 110V	✓	✓	✓	✓	✓	
	ADVANCED BLUE DIAMOND MINI CONDENSATE PUMP W/ RESERVOIR & SENSOR (208/230V) [RECOMMENDED]	X87-721 - 208/230V	✓	✓	✓	✓	✓	
	MICROBLUE BLUE DIAMOND MINI CONDENSATE PUMP (110/208/230V) UP TO 18,000 BTU/H	X85-003			✓	✓	✓	
	FASCIA KIT FOR MICROBLUE PUMP – MOUNTS THE MICROBLUE AND SENSOR DIRECTLY BENEATH THE INDOOR UNIT	T18-016			✓	✓	✓	
	DRAIN PAN LEVEL SENSOR	DPLS2	✓	✓	✓	✓	✓	
DISCONNECT SWITCH	(30A/600V/UL) [FITS 2" X 4" UTILITY BOX] - BLACK	TAZ-MS303	✓	✓	✓	✓	✓	
	(30A/600V/UL) [FITS 2" X 4" UTILITY BOX] - WHITE	TAZ-MS303W	✓	✓	✓	✓	✓	
SEPARATE POWER TERMINAL BLOCK KIT		SPTB1						
ELECTRIC HEAT LOCKOUT CONTROL		ETC-211000-000						
DOWN FLOW KIT	DOWNFLOW KIT	DFK-S						
	DOWNFLOW KIT	DFK-M						
ELECTRIC KIT HEATS	3KW ELECTRIC HEATER	EH03-SVZ-S						
	5KW ELECTRIC HEATER	EH05-SVZ-S						
	8KW ELECTRIC HEATER	EH08-SVZ-S						
	5KW ELECTRIC HEATER	EH05-SVZ-M						
	8KW ELECTRIC HEATER	EH08-SVZ-M						
	10KW ELECTRIC HEATER	EH10-SVZ-M						

✓ COMPATIBLE

* UNABLE TO USE WITH WIRELESS REMOTE CONTROLLER

M-SERIES ACCESSORIES

	MSZ-JP 9, 12	MSZ-HM 6, 9, 12, 15, 18, 24	MSZ-WR 9, 12, 18, 24	MSZ-EF 9, 12, 15, 18	MFZ-KJ 9, 12, 15, 18	MLZ 9, 12, 18	SLZ-KF 9, 12, 15	SEZ-KD 9, 12, 15, 18	SVZ 12, 18, 24, 30, 36	PEAD 9, 12, 15, 18, 24, 30, 36, 42
					✓	✓	✓	✓	✓	✓
							✓	✓	✓	✓
							✓	✓	✓	✓
							✓	✓	✓	✓
										✓
	✓	✓	✓	✓	✓	✓				✓
							✓	✓	✓	✓
						✓				
							✓			
								9 ✓		
								12, 15 ✓		
								18 ✓		
	✓	✓	✓	✓	✓		✓	✓		✓
	✓	✓	✓	✓	✓		✓	✓		
	✓	✓	✓	✓	✓		✓	✓		
	✓	✓	✓	✓	✓		✓	✓		
	✓	✓	✓	✓	✓		✓	✓		
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓			✓	
		✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓						
	✓	✓	✓	✓						
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
									✓	
									✓	
									12, 18, 24 ✓	
									30, 36 ✓	
									12, 18, 24 ✓	
									12, 18, 24 ✓	
									18, 24 ✓	
									30, 36 ✓	
									30, 36 ✓	
									30, 36 ✓	

M-SERIES ACCESSORIES

SERIES NAME			OUTDOOR UNIT					
			MUY-GL 6, 9, 12, 15, 18, 24NA	MUY-D 30, 36	MUZ-FH 6, 9, 12, 15, 18NA	MUZ-FH 6, 9, 12, 15, 18NAH	MUZ-GL 9, 12, 15, 18, 24NA	
JOINT PIPE	PORT ADAPTER SIZE: 1/2" X 3/8"***	MAC-A455JP-E						
AIR OUTLET GUIDE	AIR OUTLET GUIDE	MAC-881SG	9, 12, 15 ✓		6, 9, 12 ✓	6, 9, 12 ✓	9, 12, 15 ✓	
	AIR OUTLET GUIDE	MAC-886SG-E	18, 24 ✓		15, 18 ✓	15, 18 ✓	18, 24 ✓	
DRAIN SOCKET	DRAIN SOCKET	MAC-860DS	✓		✓		✓	
	DRAIN SOCKET	MAC-811DS		✓				
OPTIONAL DEFROST HEATER	OPTIONAL DEFROST HEATER	MAC-640BH-U	9, 12, 15 ✓			6, 9, 12 ✓		
	OPTIONAL DEFROST HEATER	MAC-642BH-U1	18, 24 ✓			15, 18 ✓		
HAIL GUARDS	HAIL GUARD	HG-B4	9, 12, 15 ✓		6, 9, 12 ✓	6, 9, 12 ✓	9, 12, 15 ✓	
	HAIL GUARD	HG-A7	18, 24 ✓		15, 18 ✓	15, 18 ✓	18, 24 ✓	
OUTDOOR UNIT MOUNTING PAD	OUTDOOR UNIT 3-1/4 INCH MOUNTING BASE (PAIR) - PLASTIC	DSD-400P	✓	✓	✓	✓	✓	
	CONDENSING UNIT MOUNTING PAD 16" X 36" X 3"	ULTRILITE1	✓	✓	✓	✓	✓	
OUTDOOR UNIT STAND	OUTDOOR UNIT STAND – 12" HIGH	QSMS1201M	✓	✓	✓	✓	✓	
	OUTDOOR UNIT STAND – 18" HIGH	QSMS1801M	✓	✓	✓	✓	✓	
	OUTDOOR UNIT STAND – 24" HIGH	QSMS2401M	✓	✓	✓	✓	✓	
WALL BRACKET	HEAVY DUTY WALL MOUNTING BRACKET – COATED STEEL	QSWB2000M-1	✓	✓	✓	✓	✓	
	HEAVY DUTY WALL MOUNTING BRACKET – 316 SERIES STAINLESS STEEL	QSWBSS	✓	✓	✓	✓	✓	
LINESET	15' X 1/4" X 15' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-15	9, 12 ✓		6, 9, 12 ✓	6, 9, 12 ✓	9, 12 ✓	
	30' X 1/4" X 30' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-30	9, 12 ✓		6, 9, 12 ✓	6, 9, 12 ✓	9, 12 ✓	
	50' X 1/4" X 50' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-50	9, 12 ✓		6, 9, 12 ✓	6, 9, 12 ✓	9, 12 ✓	
	65' X 1/4" X 65' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-65	9, 12 ✓		6, 9, 12 ✓	6, 9, 12 ✓	9, 12 ✓	
	15' X 1/4" X 15' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-15	15, 18 ✓		15, 18 ✓	6, 15, 18 ✓	15, 18 ✓	
	30' X 1/4" X 30' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-30	15, 18 ✓		15, 18 ✓	6, 15, 18 ✓	15, 18 ✓	
	50' X 1/4" X 50' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-50	15, 18 ✓		15, 18 ✓	6, 15, 18 ✓	15, 18 ✓	
	65' X 1/4" X 65' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-65	15, 18 ✓		15, 18 ✓	6, 15, 18 ✓	15, 18 ✓	
	100' X 1/4" X 100' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-100	15, 18 ✓		15, 18 ✓	6, 15, 18 ✓	15, 18 ✓	
	10' X 3/8" X 10' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-10	24 ✓	✓			24 ✓	
	15' X 3/8" X 15' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-15	24 ✓	✓			24 ✓	
	30' X 3/8" X 30' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-30	24 ✓	✓			24 ✓	
	50' X 3/8" X 50' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-50	24 ✓	✓			24 ✓	
	65' X 3/8" X 65' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-65	24 ✓	✓			24 ✓	
	100' X 3/8" X 100' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-100	24 ✓	✓			24 ✓	

✓ COMPATIBLE

*** PEAD12/SUZ-KA12NA2

M-SERIES ACCESSORIES

	MUZ-D 30, 36NA	MUZ-JP 9, 12WA	MUZ-HM 6, 9, 12, 15, 18, 24	MUZ-WR 9, 12, 18, 24NA	MUFZ-KJ 9, 12, 15, 18NAHZ	SUZ 9, 12, 15, 18, 24, 30, 36NA2
						12 ✓
		✓	9, 12, 15, 18 ✓	9, 12, 18 ✓	9, 12 ✓	9, 12, 15 ✓
			24 ✓	24 ✓	15, 18 ✓	18, 24, 30, 36 ✓
		✓		✓		
	✓					
			9, 12, 15, 18 ✓			9, 12, 15 ✓
			24 ✓			18, 24, 30, 36 ✓
		✓	9, 12, 15, 18 ✓	9, 12, 18 ✓	9, 12 ✓	9, 12, 15 ✓
			24 ✓	24 ✓	15, 18 ✓	18, 24, 30, 36 ✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
		✓	9, 12 ✓	9, 12 ✓	9, 12 ✓	9, 12, 15 ✓
		✓	9, 12 ✓	9, 12 ✓	9, 12 ✓	9, 12, 15 ✓
		✓	9, 12 ✓	9, 12 ✓	9, 12 ✓	9, 12, 15 ✓
		✓	9, 12 ✓	9, 12 ✓	9, 12 ✓	9, 12, 15 ✓
			15, 18 ✓	18 ✓	15, 18 ✓	18 ✓
			15, 18 ✓	18 ✓	15, 18 ✓	18 ✓
			15, 18 ✓	18 ✓	15, 18 ✓	18 ✓
			15, 18 ✓	18 ✓	15, 18 ✓	18 ✓
			15, 18 ✓	18 ✓	15, 18 ✓	18 ✓
	✓		24 ✓	24 ✓		24, 30, 36 ✓
	✓		24 ✓	24 ✓		24, 30, 36 ✓
	✓		24 ✓	24 ✓		24, 30, 36 ✓
	✓		24 ✓	24 ✓		24, 30, 36 ✓
	✓		24 ✓	24 ✓		24, 30, 36 ✓
	✓		24 ✓	24 ✓		24, 30, 36 ✓

M-SERIES ACCESSORIES

SERIES NAME			OUTDOOR UNIT							
			MXZ C-SERIES							
			MXZ-							
			2C20NA2	3C24NA2	3C30NA2	4C36NA2	5C42NA2	8C48NA	8C60NA	
DISTRIBUTION PIPE FOR BRANCH BOX	FLARE CONNECTION	MSDD-50AR-E						✓	✓	
	BRAZED	MSDD-50BR-E						✓	✓	
JOINT PIPE	PORT ADAPTER SIZE: 3/8" X 5/8"	PAC-SG76RJ-E	✓	✓	✓	✓	✓	✓	✓	
	PORT ADAPTER SIZE: 1/4" X 3/8"	PAC-493PI	✓	✓	✓	✓	✓	✓	✓	
	PORT ADAPTER SIZE: 3/8" X 1/2"	MAC-A454JP-E	✓	✓	✓	✓	✓	✓	✓	
	PORT ADAPTER SIZE: 1/2" X 3/8"	MAC-A455JP-E	✓	✓	✓	✓	✓	✓	✓	
	PORT ADAPTER SIZE: 1/2" X 5/8"	MAC-A456JP-E	✓	✓	✓	✓	✓	✓	✓	
	PORT ADAPTER SIZE: 5/8" X 3/4"	ADO-5834							✓	
BRANCH BOX	BRANCH BOX	PAC-MKA51BC						✓	✓	
	BRANCH BOX	PAC-MKA31BC						✓	✓	
	BRANCH BOX OUTER COVER	BBE-1						✓	✓	
AIR OUTLET GUIDE	AIR OUTLET GUIDE	MAC-856SG	✓							
	AIR OUTLET GUIDE***	PAC-SH96SG-E		✓	✓	✓	✓	✓***	✓***	
WIND BAFFLE	FRONT WIND BAFFLE	WB-PA3						✓***	✓***	
DRAIN SOCKET	DRAIN SOCKET	PAC-SG60DS-E		✓	✓	✓	✓			
	DRAIN SOCKET	PAC-SG61DS-E						✓	✓	
OPTIONAL DEFROST HEATER	OPTIONAL DEFROST HEATER	PAC-645BH-E		✓	✓	✓	✓			
	OPTIONAL DEFROST HEATER	PAC-646BH-E	✓							
	OPTIONAL DEFROST HEATER	PAC-SJ20BH-E						✓	✓	
CENTRALIZED DRAIN PAN		PAC-SH97DP-E						✓	✓	
M-NET CONVERTER		PAC-IF01MNT-E	✓	✓	✓	✓	✓			
BALL VALVE	REFRIGERATION BALL VALVE-FLARE/SCHRADER/ INSULATED – 1/2" SIZE	BV12FFSI2	✓	✓	✓	✓	✓	✓	✓	
	REFRIGERATION BALL VALVE-FLARE/SCHRADER/ INSULATED – 1/4" SIZE	BV14FFSI2	✓	✓	✓	✓	✓	✓	✓	
	REFRIGERATION BALL VALVE-FLARE/SCHRADER/ INSULATED – 3/8" SIZE	BV38FFSI2	✓	✓	✓	✓	✓	✓	✓	
	REFRIGERATION BALL VALVE-FLARE/SCHRADER/ INSULATED – 5/8" SIZE	BV58FFSI2	✓	✓	✓	✓	✓	✓	✓	
HAIL GUARDS	HAIL GUARD	HG-A1					✓			
	HAIL GUARD	HG-A2						✓	✓	
	HAIL GUARD	HG-A8	✓							
	HAIL GUARD	HG-A9		✓	✓	✓				
OUTDOOR UNIT MOUNTING PAD	OUTDOOR UNIT 3-1/4 INCH MOUNTING BASE (PAIR) - PLASTIC	DSD-400P	✓	✓	✓	✓	✓	✓	✓	
	CONDENSING UNIT MOUNTING PAD 16" X 36" X 3"	ULTRILITE1	✓	✓	✓	✓	✓	✓	✓	
	CONDENSING UNIT MOUNTING PAD 24" X 42" X 3"	ULTRILITE2					✓			

✓ COMPATIBLE

*** 8C48/8C60 REQUIRES TWO (2) PIECES

M-SERIES ACCESSORIES

	MXZ C-SERIES					
	MXZ-					
	2C20NAHZ2	3C24NAHZ2	3C30NAHZ2	4C36NAHZ	5C42NAHZ	8C48NAHZ
				✓	✓	✓
				✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
				✓	✓	✓
				✓	✓	✓
				✓	✓	✓
	✓	✓	✓	✓***	✓***	✓***
				✓***	✓***	✓***
				✓	✓	✓
	✓	✓	✓			
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓			
				✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓		✓
			✓	✓	✓	

M-SERIES ACCESSORIES

SERIES NAME			OUTDOOR UNIT							
			MXZ C-SERIES							
			MXZ-							
			2C20NA2	3C24NA2	3C30NA2	4C36NA2	5C42NA2	8C48NA	8C60NA	
OUTDOOR UNIT STAND	OUTDOOR UNIT STAND – 12" HIGH	QSMS1201M	✓	✓	✓	✓	✓			
	OUTDOOR UNIT STAND – 18" HIGH	QSMS1801M	✓	✓	✓	✓	✓			
	OUTDOOR UNIT STAND – 24" HIGH	QSMS2401M	✓	✓	✓	✓	✓			
	OUTDOOR UNIT STAND – 12" HIGH	QSMS1202M						✓	✓	
	OUTDOOR UNIT STAND – 18" HIGH	QSMS1802M						✓	✓	
	OUTDOOR UNIT STAND – 24" HIGH	QSMS2402M						✓	✓	
WALL BRACKET	HEAVY DUTY WALL MOUNTING BRACKET – COATED STEEL	QSWB2000M-1	✓	✓	✓	✓	✓	✓	✓	
	HEAVY DUTY WALL MOUNTING BRACKET – 316 SERIES STAINLESS STEEL	QSWBSS	✓	✓	✓	✓	✓	✓	✓	
LINESET	15' X 1/4" X 15' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-15	✓	✓	✓	✓	✓			
	30' X 1/4" X 30' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-30	✓	✓	✓	✓	✓			
	50' X 1/4" X 50' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-50	✓	✓	✓	✓	✓			
	65' X 1/4" X 65' / 3/8" LINESET (TWIN-TUBE INSULATION)	MLS143812T-65	✓	✓	✓	✓	✓			
	15' X 1/4" X 15' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-15		✓	✓	✓	✓			
	30' X 1/4" X 30' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-30		✓	✓	✓	✓			
	50' X 1/4" X 50' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-50		✓	✓	✓	✓			
	65' X 1/4" X 65' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-65		✓	✓	✓	✓			
	100' X 1/4" X 100' / 1/2" LINESET (TWIN-TUBE INSULATION)	MLS141212T-100		✓	✓	✓	✓			
	10' X 3/8" X 10' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-10						✓		
	15' X 3/8" X 15' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-15						✓		
	30' X 3/8" X 30' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-30						✓		
	50' X 3/8" X 50' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-50						✓		
	65' X 3/8" X 65' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-65						✓		
	100' X 3/8" X 100' X 5/8" LINESET (TWIN-TUBE INSULATION)	MPLS385812T-100						✓		
	15' X 3/8" X 15' / 3/4" LINESET (TWIN-TUBE INSULATION)	MPLS383412T-15							✓	
	50' X 3/8" X 50' / 3/4" LINESET (TWIN-TUBE INSULATION)	MPLS383412T-50							✓	

✓ COMPATIBLE

M-SERIES ACCESSORIES

MXZ C-SERIES						
MXZ-						
	2C20NAHZ2	3C24NAHZ2	3C30NAHZ2	4C36NAHZ	5C42NAHZ	8C48NAHZ
	✓	✓	✓			
	✓	✓	✓			
	✓	✓	✓			
				✓	✓	✓
				✓	✓	✓
				✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓
	✓	✓	✓			
	✓	✓	✓			
	✓	✓	✓			
	✓	✓	✓			
		✓	✓			
		✓	✓			
		✓	✓			
		✓	✓			
		✓	✓			
				✓	✓	✓
				✓	✓	✓
				✓	✓	✓
				✓	✓	✓
				✓	✓	✓
				✓	✓	✓

SPECIFICATIONS TABLES



SINGLE-ZONE | MSY-GL | COOLING ONLY



Model Name	Indoor Unit		MSY-GL09NA	MSY-GL12NA	MSY-GL15NA	MSY-GL18NA	MSY-GL24NA	
	Outdoor Unit		MUY-GL09NA	MUY-GL12NA	MUY-GL15NA	MUY-GL18NA	MUY-GL24NA	
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,000	18,000	22,500	
	Capacity Range	Btu/h	3,600－12,200	1,500－13,600	3,100－18,200	5,800－22,000	8,200－31,400	
	Rated Power Input	W	585	920	1,080	1,340	1800	
	Energy Efficiency	SEER	24.6	23.1	21.6	20.5	20.5	
	Moisture Removal	Pints/h	1.5	2.5	2.7	2.1	5.1	
	Sensible Heat Factor		0.820	0.770	0.780	0.870	0.750	
Power Supply *2	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V					
Voltage	Indoor-Outdoor S1－S2		AC 208/230V					
	Indoor-Outdoor S2－S3		DC ±24V					
	Indoor-Remote Controller		Wireless Type (Optional Wired Controller: DC 12V)					
Indoor Unit	MCA	A	1.0					
	Blower Motor (ECM)	F.L.A.	0.76			0.67	0.76	
	Airflow at Cooling	DRY (CFM)	145-170-237-321-399		205-272-335-420-533	258-332-417-522-646	388-469-544-628-738	
	(Quiet-Lo-Med-Hi-Super Hi)*1	WET (CFM)	109-134-201-286-364		170-237-300-385-498	232-299-375-470-581	347-420-487-562-661	
	Sound Pressure Level at Cooling	dB(A)	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-45-49-53	
	(Quiet-Lo-Med-Hi-Super Hi)*1							
	External Finish Color		Munsell 1.0Y 9.2 / 0.2					
	Dimension Unit	W: In.	31-7/16			36-5/16		43-5/16
		D: In.	9-1/8			9-13/16		9-3/8
		H: In.	11-5/8			12		12-13/16
	Weight Unit	Lbs.	22			28		37
	Field Drainpipe Size O.D.	In.	5/8					
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®					
Outdoor Unit	MCA	A	7		9	14	17.1	
	MOCP	A	15				20	
	Fan Motor (ECM)	F.L.A.	0.50			0.93		
	Compressor	Model (Type)	DC INVERTER-driven		DC INVERTER-driven Twin Rotary			
		R.L.A.	4.9		6.8	10.0	12.9	
		L.R.A.	6.1		8.5	12.5	16.1	
	Airflow (Cooling)	CFM	1,229/1,172		1,243/1,229	1,691/1,691	1,769/1,701	
	Refrigerant Control		Linear Expansion Valve					
	Sound Pressure Level at Cooling *1	dB(A)	48	49		54	55	
	External Finish Color		Munsell No. 3Y 7.8 / 1.1					
	Dimensions	W: In.	31-1/2			33-1/16		
		D: In.	11-1/4			13		
		H: In.	21-5/8			34-5/8		
	Weight	Lbs.	81			121	119	
Refrigerant	Type	R410A						
	Charge	Lbs., Oz.	2, 9			3, 9	4, 3	
	Oil	Type (fl. oz.)	FV50S (9.1)	FV50S (11.8)			FV50S (13.5)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2		5/8	
	Liquid Side O.D.	In.	1/4				3/8	
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50		
	Length (Max.)	Ft.	65			100		
Connection Method	Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | MSY-D | COOLING ONLY



Model Name	Indoor Unit		MSY-D30NA-8	MSY-D36NA-8
	Outdoor Unit		MUY-D30NA-1	MUY-D36NA-1
Cooling *1	Rated Capacity	Btu/h	30,700	34,600
	Capacity Range	Btu/h	9,800–30,700	9,800–34,600
	Total Input	W	3,380 (620–3,380)	4,240 (620–4,240)
	Energy Efficiency	SEER	16	15.1
	Moisture Removal	Pints/h	9.9	11.9
	Sensible Heat Factor		0.64	0.62
Power Supply *2	Phase, Cycle, Voltage		1-phase, 60Hz, 208/230V	
Voltage	Indoor-Outdoor S1 – S2		AC 208/230V	
	Indoor-Outdoor S2 – S3		DC ±24V	
	Indoor-Remote Controller		Wireless Type (Optional Wired Controller: DC 12V)	
Indoor Unit	MCA	A	1.0	
	Blower Motor (ECM)	F.L.A.	0.76	
	Airflow at Cooling (Lo-Med-Hi-Powerful)*1	DRY (CFM)	389-639-848-887	
		WET (CFM)	350-576-763-798	
	Sound Pressure Level at Cooling (Lo-Med-Hi-Powerful) *1	dB(A)	32-42-49-51	
	External Finish Color		Munsell No. 1.0Y 9.2 / 0.2	
	Dimension Unit	W: In.	46-1/16	
		D: In.	11-5/8	
		H: In.	14-3/8	
	Weight Unit	Lbs.	40	
	Field Drainpipe Size O.D.	In.	5/8	
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®	
Outdoor Unit	MCA	A	21	
	MOCP	A	25	
	Fan Motor (ECM)	F.L.A.	0.93	
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary	
		R.L.A.	16	
		L.R.A.	20	
	Airflow (Cooling)	CFM	1,941	
	Refrigerant Control		Linear Expansion Valve	
	Sound Pressure Level at Cooling *1	dB(A)	55	56
	External Finish Color		Munsell No. 3Y 7.8 / 1.1	
	Dimensions	W: In.	33-1/16	
		D: In.	13	
		H: In.	33-7/16	
	Weight	Lbs.	126	
Refrigerant	Type		R410A	
	Charge	Lbs., Oz.	4	
	Oil	Type (fl. oz.)	NEO22 (29.4)	
Refrigerant Pipe	Gas Side O.D.	In.	5/8	
	Liquid Side O.D.	In.	3/8	
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	50	
	Length (Max.)	Ft.	100	
Connection Method	Indoor/Outdoor		Flared/Flared	

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | MSZ-FH | HEAT PUMP



Model Name	Indoor Unit		MSZ-FH06NA	MSZ-FH09NA	MSZ-FH12NA	MSZ-FH15NA	MSZ-FH18NA2
	Outdoor Unit		MUZ-FH06NA(H)	MUZ-FH09NA(H)	MUZ-FH12NA(H)	MUZ-FH15NA(H)	MUZ-FH18NA(H)2
Cooling *1	Rated Capacity	Btu/h	6,000	9,000	12,000	15,000	17,200
	Capacity Range	Btu/h	1,700–9,000	1,700–12,000	2,500–13,600	6,450–19,000	6,450–21,000
	Rated Power Input	W	315	560	870	1,200	1,375
	Energy Efficiency	SEER	33.1	30.5	26.1	22.0	21.0
	Moisture Removal	Pints/h	0.2	0.6	1.9	4.0	4.8
	Sensible Heat Factor		0.960	0.920	0.830	0.700	0.690
Heating at 47° F *2	Rated Capacity	Btu/h	8,700	10,900	13,600	18,000	20,300
	Capacity Range	Btu/h	1,600–14,000	1,600–18,000	3,700–21,000	5,150–24,000	5,150–30,000
	Rated Power Input	W	545	710	950	1,300	1,720
	HSPF (IV)	Btu/h/W	13.5(12.5)	13.5(12.5)	12.5(11.5)	12.0(11.0)	12.0(11.0)
Heating at 17° F *3	Rated Capacity	Btu/h	5,900	6,700	8,000	11,000	13,700
	Rated Power Input	W	500	600	720	1,020	1,320
	Maximum Capacity	Btu/h	10,700	12,200	13,600	18,000	20,300
Heating at 5° F	Maximum Capacity	Btu/h	8,700	10,900	13,600	18,000	20,300
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V				
Voltage	Indoor — Outdoor S1–S2		AC 208 / 230V				
	Indoor — Outdoor S2–S3		DC ±24V				
	Indoor — Remote Controller		Wireless Type (Optional Wired Controller: DC12V)				
Indoor Unit	MCA	A	1.0				
	Blower Motor (ECM)	F.L.A.	0.67				
	Airflow at Cooling (Quiet — Low — Med. — High — Super Hi) *1	DRY (CFM)	137-167-221-304-381	137-167-221-304-381	137-167-221-304-398	225-262-304-355-411	225-262-304-355-459
		WET (CFM)	117-143-190-261-328	117-143-190-261-328	117-143-190-261-342	194-225-261-305-354	194-225-261-305-395
	Airflow at Heating (Quiet — Low — Med. — High — Super Hi) *2	DRY (CFM)	140-167-225-325-437	140-167-225-325-437	140-167-225-325-454	201-254-317-394-497	201-254-317-394-514
	Sound Pressure Level at Cooling (Quiet — Low — Med. — High — Super Hi) *1	dB(A)	20-23-29-36-40		21-24-29-36-41	27-31-35-39-44	27-31-35-39-47
	Sound Pressure Level at Heating (Quiet — Low — Med. — High — Super Hi) *2	dB(A)	20-24-29-36-42		21-24-29-36-42	25-29-34-39-46	
	External Finish Color		Munsell No. 1.0Y 9.2 / 0.2				
	Dimension Unit	W: In.	36-7/16				
		D: In.	9-3/16				
		H: In.	12(+11/16)				
	Weight Unit	Lbs.	29				
	Field Drainpipe Size O.D.	In.	5/8				
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®				
Outdoor Unit	MCA	A	11			16	16
	MOCP	A	15			20	
	Fan Motor (ECM)	F.L.A.	0.50			0.93	
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary				
		R.L.A.	8.2			12.0	
		L.R.A.	10.3			15.0	
	Airflow (Cooling/Heating)	CFM	1,074/1,202	1,074/1,202		1,692/1,634	
	Refrigerant Control		Linear Expansion Valve				
	Defrost Method		Reverse Cycle				
	Sound Pressure Level at Cooling *1	dB(A)	47	48	49	51	52
	Sound Pressure Level at Heating *2	dB(A)	48	49	51	55	55
	External Finish Color		Munsell No. 3Y 7.8 / 1.1				
	Dimensions	W: In.	31-1/2			33-1/16	
		D: In.	11-1/4			13	
		H: In.	21-5/8			34-5/8	
	Weight	Lbs.	81		83	124	
Refrigerant	Type		R410A				
	Charge	Lbs., Oz.	2, 9			3, 7	
	Oil	Type (fl.oz.)	FV50S (11.8)			FV50S (13.5)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8			1/2	
	Liquid Side O.D.	In.	1/4				
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50	
	Length (Max.)	Ft.	65			100	
Connection Method	Indoor/Outdoor		Flared/Flared				

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring. Specifications are subject to change without notice.

LIMITED WARRANTY I Seven-year warranty on compressor. Five-year warranty on parts.

SINGLE-ZONE | MSZ-GL | HEAT PUMP



Model Name	Indoor Unit		MSZ-GL09NA	MSZ-GL12NA	MSZ-GL15NA	MSZ-GL18NA	MSZ-GL24NA	
	Outdoor Unit		MUZ-GL09NA	MUZ-GL12NA	MUZ-GL15NA	MUZ-GL18NA	MUZ-GL24NA	
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,000	18,000	22,400	
	Capacity Range	Btu/h	3,600–12,200	1,500–13,600	3,100–18,200	5,800–22,000	8,200–31,400	
	Rated Power Input	W	585	920	1,080	1,340	1,800	
	Energy Efficiency	SEER	24.6	23.1	21.6	20.5	20.5	
	Moisture Removal	Pints/h	1.5	2.5	2.7	2.1	5.1	
	Sensible Heat Factor		0.820	0.740	0.800	0.870	0.750	
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	14,400	18,000	21,600	27,600	
	Capacity Range	Btu/h	4,500–15,900	2,000–18,100	4,800– 20,900	5,400–25,000	7,500–36,900	
	Rated Power Input	W	720	1,100	1,600	1,680	2,340	
	HSPF (IV)	Btu/h/W	12.8	12.5	11.7	11.2	10.0	
Heating at 17° F *3	Rated Capacity	Btu/h	6,700	9,200	12,200	13,800	16,000	
	Rated Power Input	W	630	870	1,190	1,435	1,712	
	Maximum Capacity	Btu/h	10,200	12,000	16,400	18,200	24,600	
Heating at 5° F	Maximum Capacity	Btu/h	8,170	9,790	13,680	14,900	19,320	
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V					
Voltage	Indoor-Outdoor S1 – S2		AC 208 / 230V					
	Indoor-Outdoor S2 – S3		DC ±24V					
	Indoor-Remote Controller		Wireless Type (Optional Wired Controller: DC12V)					
Indoor Unit	MCA	A	1.0					
	Blower Motor (ECM)	F.L.A.	0.76			0.67	0.76	
	Airflow at Cooling (Quiet — Lo — Med — Hi — Super Hi) *1	DRY (CFM)	145-170-237-321-399			205-272-335-420-533	258-332-417-522-646	388-469-544-628-738
		WET (CFM)	109-134-201-286-364			170-237-300-385-498	232-299-375-470-581	347-420-487-562-661
	Airflow at Heating (Quiet — Lo — Med — Hi — Super Hi) *2	DRY (CFM)	145-170-237-321-406			205-247-304-367-463	297-385-469-565-646	388-469-544-628-738
	Sound Pressure Level at Cooling (Quiet — Lo — Med — Hi — Super Hi) *1	dB(A)	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-45-49-53	
	Sound Pressure Level at Heating (Quiet — Lo — Med — Hi — Super Hi) *2	dB(A)	19-22-30-37-43	19-22-30-37-43	26-30-35-40-46	28-33-38-43-48	32-41-45-49-52	
	External Finish Color		Munsell 1.0Y 9.2 / 0.2					
	Dimension Unit	W: In.	31-7/16			36-5/16		43-5/16
		D: In.	9-1/8			9-13/16		9-3/8
		H: In.	11-5/8			12		12-13/16
	Weight Unit	Lbs.	22			28		37
Field Drainpipe Size O.D.	In.	5/8						
Remote Controller	TypeV		Compatible with multiple controls options including kumo cloud®					
Outdoor Unit	MCA	A	9		10	14	17.1	
	MOCP	A	15				20	
	Fan Motor (ECM)	F.L.A.	0.5			0.93		
	Compressor	Model (Type)	DC INVERTER-driven			DC INVERTER-driven Twin Rotary		
		R.L.A.	6.2	6.6	7.4	10.0	12.9	
		L.R.A.	7.7	8.2	9.3	12.5	16.1	
	Airflow (Cooling/Heating)	CFM	1,229/1,172	1,229 / 1,172	1,243 / 1,229	1,691 / 1,691	1,769 / 1,701	
	Refrigerant Control		Linear Expansion Valve					
	Defrost Method		Reverse Cycle					
	Sound Pressure Level at Cooling *1	dB(A)	48	49		54	55	
	Sound Pressure Level at Heating *2	dB(A)	50	51		55		
	External Finish Color		Munsell No. 3Y 7.8 / 1.1					
	Dimensions	W: In.	31-1/2			33-1/16		
		D: In.	11-1/4			13		
		H: In.	21-5/8			34-5/8		
	Weight	Lbs.	81			121	119	
	Refrigerant	Type		R410A				
Charge		Lbs., Oz.	2, 5	2, 9		3, 9	4, 3	
Oil		Type (fl. oz.)	FV50S (9.1)	FV50S (11.8)			FV50S (13.5)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2		5/8	
	Liquid Side O.D.	In.	1/4				3/8	
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50		
	Length (Max.)	Ft.	65			100		
Connection Method	Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY I Five years parts and seven years compressor.

SINGLE-ZONE | MSZ-D | HEAT PUMP



Model Name	Indoor Unit		MSZ-D30NA-8	MSZ-D36NA-8
	Outdoor Unit		MUZ-D30NA-1	MUZ-D36NA-1
Cooling *1	Rated Capacity	Btu/h	30,700	33,200
	Capacity Range	Btu/h	9,800–30,700	9,800–33,200
	Total Input	W	3,850 (620–3,850)	4,360 (620–4,360)
	Energy Efficiency	SEER	14.5	
	Moisture Removal	Pints/h	9.9	11.3
Heating at 47° F *2	Sensible Heat Factor		0.64	0.62
	Rated Capacity	Btu/h	32,600	35,200
	Capacity Range	Btu/h	8,700–34,000	8,700–36,000
	Total Input	W	3,360 (520–3,600)	3,840 (520–4,100)
Heating at 17° F *3	HSPF (Region IV)	Btu/h/W	8.2	
	Rated Capacity	Btu/h	19,500	21,800
	Rated Power Input	W	2,620	3,000
	Maximum Capacity	Btu/h	20,800	22,800
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V	
Voltage	Indoor-Outdoor S1–S2		AC 208-230V	
	Indoor-Outdoor S2–S3		DC ±24V	
	Indoor-Remote Controller		Wireless Type (Optional Wired Controller: DC12V)	
Indoor Unit	MCA	A	1.0	
	Blower Motor (ECM)	F.L.A.	0.76	
	Airflow at Cooling (Lo – Med – Hi – Powerful) *1	DRY (CFM)	389-639-848-887	
		WET (CFM)	350-576-763-798	
	Airflow at Heating (Lo – Med – Hi – Powerful) *2	DRY (CFM)	445-639-848-887	
	Sound Pressure Level (Cooling) (Lo – Med – Hi – Powerful) *1	dB(A)	32-42-49-51	
	Sound Pressure Level (Heating) (Lo – Med – Hi – Powerful) *2		34-42-49-50	
	External Finish Color		Munsell No. 1.0Y 9.2 / 0.2	
	Dimension Unit	W: In.	46-1/16	
		D: In.	11-5/8	
		H: In.	14-3/8	
Remote Controller	Weight Unit	Lbs.	40	
	Field Drainpipe Size O.D.	In.	5/8	
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®	
Outdoor Unit	MCA	A	21	
	MOCP	A	25	
	Fan Motor (ECM)	F.L.A.	0.93	
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary	
		R.L.A.	16	
		L.R.A.	20	
	Airflow	CFM	1,941	
	Refrigerant Control		Linear Expansion Valve	
	Defrost Method		Reverse Cycle	
	Sound Pressure Level at Cooling *1	dB(A)	55	56
	Sound Pressure Level at Heating *2	dB(A)	57	
	External Finish Color		Munsell No. 3Y 7.8/1.1	
	Dimensions	W: In.	33-1/16	
		D: In.	13	
		H: In.	33-7/16	
Refrigerant	Weight	Lbs.	141	
	Type		R410A	
	Charge	Lbs., Oz.	4, 10	
Refrigerant Pipe	Oil	Type (Fl. Oz.)	NEO22 (29.4)	
	Gas Side O.D.	In.	5/8	
	Liquid Side O.D.		3/8	
	Height Difference (Max.)	Ft.	50	
Connection Method	Length (Max.)		100	
	Indoor/Outdoor		Flared/Flared	

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | MSZ-JP | HEAT PUMP



Model Name	Indoor Unit		MSZ-JP09WA	MSZ-JP12WA
	Outdoor Unit		MUZ-JP09WA	MUZ-JP12WA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000
	Capacity Range	Btu/h	3,800 –10,000	3,800 –12,000
	Rated Power Input	W	750	1,210
	Energy Efficiency	SEER	17	
	Moisture Removal	Pints/h	1.5	2.5
	Sensible Heat Factor		0.82	0.77
Heating at 47° F *2	Rated Capacity	Btu/h	6,700	7,600
	Capacity Range	Btu/h	4,500 –11,800	4,500 –14,500
	Rated Power Input	W	900	990
	HSPF (Region IV)	Btu/h/W	9.0	9.0
Heating at 17° F *3	Rated Capacity	Btu/h	6,700	7,600
	Rated Power Input	W	700	800
	Maximum Capacity	Btu/h	7,200	9,000
Heating at 5° F	Maximum Capacity	Btu/h	5,990	7,440
Power Supply *4	Phase, Cycle, Voltage		115V, 1 phase, 60Hz	
Voltage	Indoor-Outdoor S1 – S2		AC 115V	
	Indoor-Outdoor S2 – S3		DC ±24V	
	Indoor-Remote Controller		Wireless Type (Optional Wired Controller: DC12V)	
Indoor Unit	MCA	A	1.4	
	Blower Motor (ECM)	F.L.A.	1.07	
	Airflow at Cooling (Lo – Med – Hi – Powerful) *1	DRY (CFM)	170-237-321-399	
		WET (CFM)	134-201-286-364	
	Airflow at Heating (Lo – Med – Hi – Powerful) *2	DRY (CFM)	170-237-321-406	
	Sound Pressure Level (Cooling) (Lo – Med – Hi – Powerful) *1	dB(A)	22-30-37-43	
	Sound Pressure Level (Heating) (Lo – Med – Hi – Powerful) *2		22-30-37-43	
	External Finish Color		Munsell No. 1.0Y 9.2 / 0.2	
	Dimension Unit	W: In.	31-7/16	
		D: In.	9-1/8	
		H: In.	11-5/8	
	Weight Unit	Lbs.	22	
Field Drainpipe Size O.D.	In.	5/8		
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®	
Outdoor Unit	MCA	A	12	14
	MOCP	A	15	
	Fan Motor (ECM)	F.L.A.	0.7	
	Compressor	Model (Type)	DC INVERTER-driven	
		R.L.A.	8.8	10.4
		L.R.A.	11.0	13.0
	Airflow	CFM	1,941	
	Refrigerant Control		Linear Expansion Valve	
	Defrost Method		Revese Cycle	
	Sound Pressure Level at Cooling *1	dB(A)	46	49
	Sound Pressure Level at Heating *2	dB(A)	50	51
	External Finish Color		Munsell No. 3Y 7.8/1.1	
	Dimensions	W: In.	31-1/2	
		D: In.	11-1/4	
H: In.		21-5/8		
Weight	Lbs.	73		
Refrigerant	Type		R410A	
	Charge	Lbs., Oz.	1, 12	
	Oil	Type (Fl. Oz.)	FV50S (9.1)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8	
	Liquid Side O.D.		1/4	
	Height Difference (Max.)	Ft.	65	
	Length (Max.)		40	
Connection Method	Indoor/Outdoor		Flared/Flared	

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | MSZ-HM | HEAT PUMP



Model Name	Indoor Unit		MSZ-HM09NA	MSZ-HM12NA	MSZ-HM15NA	MSZ-HM18NA	MSZ-HM24NA
	Outdoor Unit		MUZ-HM09NA	MUZ-HM12NA	MUZ-HM15NA	MUZ-HM18NA	MUZ-HM24NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,000	17,200	22,500
	Capacity Range	Btu/h	3,800–10,000	3,800–12,200	3,100–16,000	5,800–18,000	5,800–22,500
	Rated Power Input	W	750	1210	1170	1640	2,630
	Energy Efficiency	SEER	18.0	18.0	18.0	18.0	18.0
	Moisture Removal	Pints/h	1.5	2.5	2.7	2.1	2.3
	Sensible Heat Factor		0.82	0.77	0.780	0.860	0.870
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	12,200	18,000	18,000	26,000
	Capacity Range	Btu/h	4,500–11,800	4,500–14,500	4,800–18,500	5,400–20,900	5,400–26,000
	Rated Power Input	W	900	990	1,600	1,590	2,500
	HSPF (IV)	Btu/h/W	10.0	10.0	10.0	10.0	9.5
Heating at 17° F *3	Rated Capacity	Btu/h	6,700	7,600	11,500	11,500	18,500
	Rated Power Input	W	780	800	1,320	1,300	2,300
	Maximum Capacity	Btu/h	7,200	9,000	14,000	15,000	18,500
Heating at 5° F	Maximum Capacity	Btu/h	5,990	7,440	12,240	12,780	15,600
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V				
Voltage	Indoor — Outdoor S1 - S2		AC 208 / 230V				
	Indoor - Outdoor S2 - S3		DC ±24V				
	Indoor - Remote Controller		Wireless Type				
Indoor Unit	MCA	A	1.0				
	Blower Motor (ECM)	F.L.A.	0.76			0.67	
	Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1	DRY (CFM)	170-237-321-399		272-335-420-533	328-431-530-625	353-431-530-702
		WET (CFM)	134-201-286-364		237-300-385-498	295-388-477-562	318-388-477-632
	Airflow at Heating (Quiet-Lo-Med-Hi-Super Hi) *2	DRY (CFM)	170-237-321-406		247-304-367-463	307-431-530-625	346-448-579-702
	Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1	dB(A)	22-30-37-43		32-38-44-49	30-37-42-47	33-38-44-50
	Sound Pressure Level at Heating (Quiet-Lo-Med-Hi-Super Hi) *2	dB(A)	22-30-37-43		30-35-40-46	30-37-42-47	32-38-44-50
	External Finish Color		Munsell 1.0Y 9.2 / 0.2				
	Dimension Unit	W: In.	31-7/16			36-5/16	
		D: In.	9-1/8			9-13/16	
		H: In.	11-5/8			12	
	Weight Unit	Lbs.	22			28	
	Field Drainpipe Size O.D.	In.	5/8				
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®				
Outdoor Unit	MCA	A	9		10		14
	MOCP	A	15				
	Fan Motor (ECM)	F.L.A.	0.5				0.93
	Compressor	Model Type)	DC INVERTER-driven Twin Rotary				
		R.L.A.	6.2		7.4		10
		L.R.A.	7.7		9.3		12.5
	Airflow (Cooling / Heating)	CFM	1,151 / 1,225		1,243/1,229		1,691 / 1,691
	Refrigerant Control		Linear Expansion Valve				
	Defrost Method		Reverse Cycle				
	Sound Pressure Level at Cooling *1	dB(A)	46	49			54
	Sound Pressure Level at Heating *2	dB(A)	50	51			55
	External Finish Color		Munsell No. 3Y 7.8 / 1.1				
	Dimensions	W: In.	31-1/2				33-1/16
		D: In.	11-1/4				13
		H: In.	21-5/8				34-5/8
Weight	Lbs.	73		81		121	
Refrigerant	Type	R410A					
	Charge	Lbs., Oz.	1, 12		2, 9	2, 10	3, 9
	Oil	Type (fl. oz.)	NEO22 (10.8)		FV50S (11.8)		
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2		5/8
	Liquid Side O.D.	In.	1/4			3/8	
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50	
	Length (Max.)	Ft.	65			100	
Connection Method	Indoor/Outdoor		Flared/Flared				

Specifications are subject to change without notice. LIMITED WARRANTY I Five years parts and seven years compressor.

SINGLE-ZONE | MSZ-WR | HEAT PUMP



Model Name	Indoor Unit		MSZ-WR09NA	MSZ-WR12NA	MSZ-WR18NA	MSZ-WR24NA
	Outdoor Unit		MUZ-WR09NA	MUZ-WR12NA	MUZ-WR18NA	MUZ-WR24NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	17,200	22,500
	Capacity Range	Btu/h	3,800 – 10,000	3,800 – 12,200	5,800 – 18,000	5,800 – 22,500
	Rated Power Input	W	820	1,330	1,720	2,810
	Energy Efficiency	SEER	16.0	16.0	16.0	16.0
	Moisture Removal	Pints/h	1.5	2.5	2.1	2.3
	Sensible Heat Factor		0.82	0.77	0.86	0.89
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	12,200	18,000	26,000
	Capacity Range	Btu/h	4,500–11,800	4,500–14,500	5,400–20,900	5,400–26,000
	Rated Power Input	W	980	1,090	1,670	2,680
	HSPF (IV)	Btu/h/W	8.5	8.5	8.5	8.5
Heating at 17° F *3	Rated Capacity	Btu/h	6,700	7,600	11,500	18,500
	Rated Power Input	W	760	880	1,360	2,460
	Maximum Capacity	Btu/h	7,200	9,000	15,000	18,500
Heating at 5° F	Maximum Capacity	Btu/h	5,990	7,440	12,780	15,600
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V			
Voltage	Indoor – Outdoor S1 - S2		AC 208 / 230V			
	Indoor - Outdoor S2 - S3		DC ±24V			
	Indoor - Remote Controller		Wireless Type			
Indoor Unit	MCA	A	1.0			
	Blower Motor (ECM)	F.L.A.	0.76		0.67	
	Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1	DRY (CFM)	170-237-321-399		328-431-530-625	353-43-530-702
		WET (CFM)	134-201-286-364		295-388-477-562	318-388-477-632
	Airflow at Heating (Quiet-Lo-Med-Hi-Super Hi) *2	DRY (CFM)	170-237-321-406		307-431-530-625	346-448-579-702
	Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1	dB(A)	22-30-37-43		30-37-42-47	33-38-44-50
	Sound Pressure Level at Heating (Quiet-Lo-Med-Hi-Super Hi) *2	dB(A)	22-30-37-43		30-37-42-47	32-38-44-50
	External Finish Color		Munsell 1.0Y 9.2 / 0.2			
	Dimension Unit	W: In.	31-7/16		36-5/16	
		D: In.	9-1/8		9-13/16	
		H: In.	11-5/8		12	
	Weight Unit	Lbs.	22		28	
	Field Drainpipe Size O.D.	In.	5/8			
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Outdoor Unit	MCA	A	9		10	14
	MOCP	A	15			
	Fan Motor (ECM)	F.L.A.	0.5			0.93
	Compressor	Model Type)	DC INVERTER-driven		DC INVERTER-driven Twin Rotary	
		R.L.A.	6.2		7.4	10.0
		L.R.A.	7.7		9.3	12.5
	Airflow (Cooling / Heating)	CFM	1,151 / 1,225		1,243 / 1,229	1,691 / 1,691
	Refrigerant Control		Linear Expansion Valve			
	Defrost Method		Reverse Cycle			
	Sound Pressure Level at Cooling *1	dB(A)	48	51	53	57
	Sound Pressure Level at Heating *2	dB(A)	50	51	51	55
	External Finish Color		Munsell No. 3Y 7.8 / 1.1			
	Dimensions	W: In.	31-1/2		33-1/16	
		D: In.	11-1/4		13	
		H: In.	21-5/8		34-5/8	
	Weight	Lbs.	73		81	121
Refrigerant	Type	R410A				
	Charge	Lbs., Oz.	1, 12		2, 10	3, 9
	Oil	Type (fl. oz.)	FV50S (9.1)		FV50S (11.8)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	5/8
	Liquid Side O.D.	In.	1/4		1/4	3/8
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	65		65	100
	Length (Max.)	Ft.	40		40	50
Connection Method	Indoor/Outdoor		Flared/Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and five years compressor.

SINGLE-ZONE | MFZ-KJ | HEAT PUMP



Model Name	Indoor Unit		MFZ-KJ09NA	MFZ-KJ12NA	MFZ-KJ15NA	MFZ-KJ18NA
	Outdoor Unit		MUFZ-KJ09NAHZ	MUFZ-KJ12NAHZ	MUFZ-KJ15NAHZ	MUFZ-KJ18NAHZ
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	15,000	17,000
	Capacity Range	Btu/h	2,300–14,000	2,300–15,000	5,300–19,000	5,300–22,500
	Rated Power Input	W	570	890	1,120	1,350
	Energy Efficiency	SEER	28.2	25.5	21.8	21.0
	Moisture Removal	Pints/h	1.4	2.7	3.9	4.4
	Sensible Heat Factor		0.790	0.700	0.660	0.650
Heating at 47° F *2	Rated Capacity	Btu/h	11,000	13,000	18,000	21,000
	Capacity Range	Btu/h	2,900–19,000	2,900–22,800	5,700–25,000	5,700–29,000
	Rated Power Input	W	750	900	1,410	1,730
	HSPF (IV)	Btu/h/W	13	12	11.6	11.3
Heating at 17° F *3	Rated Capacity	Btu/h	7,500	8,800	12,000	12,800
	Rated Power Input	W	810	930	1,300	1,430
	Maximum Capacity	Btu/h	13,400	14,800	20,500	23,000
Heating at 5° F	Maximum Capacity	Btu/h	11,000	13,000	18,000	21,000
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208/230V			
Voltage	Indoor-Outdoor S1–S2		AC 208 / 230V			
	Indoor-Outdoor S2–S3		DC ±24V			
	Indoor-Remote Controller		Wireless Type (Optional Wired Controller: DC12V)			
Indoor Unit	MCA	A	1.0			
	Fan Motor FLA	A	0.62			0.72
	Fan Motor Output	W	30			40
	Airflow at Cooling (Quiet — Lo — Med — Hi — Super Hi) *1	DRY (CFM)	138-198-272-360-417		198-254-311-392-431	198-254-328-420-491
		WET (CFM)	117-168-231-306-354		168-216-264-333-366	168-216-279-357-417
	Airflow at Heating (Quiet — Lo — Med — Hi — Super Hi) *2	DRY (CFM)	138-191-254-328-417		212-268-328-399-470	212-268-328-399-470
	Sound Pressure Level at Cooling (Quiet — Lo — Med — Hi — Super Hi) *1	dB(A)	21-27-34-41-46		28-33-38-43-47	28-33-39-45-50
	Sound Pressure Level at Heating (Quiet — Lo — Med — Hi — Super Hi) *2	dB(A)	21-27-34-40-46		29-35-40-45-49	
	External Finish Color		Munsell 1.0Y 9.2 / 0.2			
	Dimension Unit	W: In.	29-17/32			
		D: In.	8-15/32			
		H: In.	23-5/8			
	Weight Unit	Lbs.	33			
	Field Drainpipe Size O.D.	In.	5/8			
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Outdoor Unit	MCA	A	11		16	
	MOCP	A	15		20	
	Fan Motor FLA	A	0.50		0.93	
	Fan Motor Output	W	50		77	
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary			
		R.L.A.	8.2			
		L.R.A.	10.3			
	Airflow (Cooling / Heating)	CFM	1,215 / 1,201		1,653 / 1,730	
	Refrigerant Control		Linear Expansion Valve			
	Defrost Method		Reverse Cycle			
	Sound Pressure Level at Cooling *1	dB(A)	48		51	
	Sound Pressure Level at Heating *2	dB(A)	50		55	
	External Finish Color		Munsell No. 3Y 7.8 / 1.1			
	Dimensions	W: In.	31-1/2		33-1/16	
		D: In.	11-1/4		13	
		H: In.	21-5/8		34-5/8	
	Weight	Lbs.	83		124	
Refrigerant	Type	R410A				
	Charge	Lbs., Oz.	2, 10		3, 5	
	Oil	Type (fl. oz.)	FV50S (11.8)		FV50S (13.5)	
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.	In.	1/4			
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40		50	
	Length (Max.)	Ft.	65		100	
Connection Method	Indoor/Outdoor		Flared / Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice. LIMITED WARRANTY I Five years parts and seven years compressor.

SINGLE-ZONE | SVZ AIR-HANDLER | HEAT PUMP



Model Name	Indoor Unit		SVZ-KP12NA	SVZ-KP18NA	SVZ-KP24NA	SVZ-KP30NA	SVZ-KP36NA
	Outdoor Unit		SUZ-KA12NA2	SUZ-KA18NA2	SUZ-KA24NA2	SUZ-KA30NA2	SUZ-KA36NA2
Cooling *1	Rated Capacity	Btu/h	12,000	18,000	24,000	27,000	33,000
	Capacity Range	Btu/h	4,300 – 12,000	6,200 – 18,000	12,400 – 24,000	13,500 – 27,000	11,600 – 33,000
	Rated Power Input	W	940	1,360	1,920	2,160	3,720
	Energy Efficiency	SEER	18.0	18.0	18.0	18.0	16.0
	Moisture Removal	Pints/h	1.2	2.4	4.1	2.4	4.7
	Sensible Heat Factor		0.89	0.85	0.81	0.90	0.84
Heating at 47° F *2	Rated Capacity	Btu/h	15,000	21,600	25,000	30,000	33,500
	Capacity Range	Btu/h	4,700 – 16,700	8,300 – 26,000	14,600 – 28,000	12,640 – 33,000	13,260-36,000
	Rated Power Input	W	1,210	1,600	1,910	2,060	3,030
	HSPF (IV)	Btu/h/W	12.1	12.6	10.4	13.6	11.7
Heating at 17° F *3	Rated Capacity	Btu/h	9,900	14,000	14,600	21,400	23,200
	Rated Power Input	W	1,120	1,460	1,590	1,950	2,710
	Maximum Capacity	Btu/h	9,900	14,000	14,600	21,400	23,200
Heating at 5° F	Maximum Capacity	Btu/h	7,800	12,200	-	-	-
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V				
Voltage	Indoor-Outdoor S1 – S2		AC 208-230V				
	Indoor-Outdoor S2 – S3		DC ±24V				
Indoor Unit	MCA	A	3			4.13	
	Fan Motor (ECM)	F.L.A.	2.4			3.3	
	Airflow at Cooling (Lo – Med – Hi)	DRY (CFM)	278-381-448	471-573-675	515-625-735	613-744-875	767-910-910
	Airflow at Heating (Lo – Med – Hi)	DRY (CFM)	278-381-448	471-573-675	515-625-735	613-744-875	767-910-910
	External Static Pressure *3	In. W.G.	0.3 - 0.5 - 0.8				
	Sound Pressure Level	dB(A)	29-36-39	33-36-41	30-34-38	32-46-40	35-39-43
	External Finish		Black				
	Dimension Unit (Grille)	W: In.	17			21	
		D: In.	21-5/8				
		H: In.	39-13/16			43-3/4	
	Weight Unit (Grille)	Lbs.	93			119	
	Field Drainpipe Size O.D.	In.	3/4				
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®				
Outdoor Unit	MCA	A	9	14	17		
	MOCP	A	16	24	31		
	Fan Motor (ECM)	F.L.A.	0.5	0.67	1		
	Compressor	Model (Type)	DC INVERTER-driven Twin Rotary		DC INVERTER-driven	DC INVERTER-driven Twin Rotary	
		R.L.A.	6.6	10.0	13.0		
		L.R.A.	8.2	12.5	16.0		
	Airflow (Cooling/Heating)	CFM	1,229 / 1,172	1,691 / 1,691	2,020 / 1,930		
	Refrigerant Control		Linear Expansion Valve				
	Defrost Method		Reverse cycle				
	Sound Pressure Level at Cooling *1	dB(A)	49	54	55		
	Sound Pressure Level at Heating *2	dB(A)	51	55			
	External Finish Color		Munsell No. 3Y 7.8/1.1				
	Dimensions	W: In.	31-1/2	33-1/6			
		D: In.	11-1/4	13			
		H: In.	21-5/8	34-5/8			
	Weight	Lbs.	81	127	129		
Refrigerant	Type		R410A				
	Charge	Lbs., Oz.	2, 9	3, 9	4, 14		
	Oil	Type (fl. oz.)	FV50S (11.8)		FV50S (15.6)		
Refrigerant Pipe	Gas Side O.D.	In.	3/8	1/2	5/8		
	Liquid Side O.D.	In.	1/4		3/8		
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40	50	100		
	Length (Max.)	Ft.	65	100	100		
Connection Method	Indoor/Outdoor		Flared/Flared				

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | SLZ SYSTEM | HEAT PUMP



Model Name	Indoor Unit		SLZ-KF09NA	SLZ-KF12NA	SLZ-KF15NA	SLZ-KF18NA
	Outdoor Unit		SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA15NA2	SUZ-KA18NA2
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,100	17,700
	Capacity Range	Btu/h	3,600 – 9,000	3,900 – 12,000	5,100 – 14,100	6,100 – 17,700
	Rated Power Input	W	670	900	1,150	1,410
	Energy Efficiency	SEER	22.4	22.0	19.8	20.7
	Moisture Removal	Pints/h	1.0	2.8	3.2	4.7
	Sensible Heat Factor		0.87	0.74	0.75	0.71
Heating at 47° F *2	Rated Capacity	Btu/h	11,000	13,000	18,000	19,700
	Capacity Range	Btu/h	4,010-12,000	4,800-13,000	5,100-19,000	8,400-20,900
	Rated Power Input	W	810	1,310	1,730	1,850
	HSPF (IV)	Btu/h/W	12.2	11.4	11.2	11.6
Heating at 17° F *3	Rated Capacity	Btu/h	6,900	8,900	11,900	12,900
	Rated Power Input	W	810	1,130	1,290	1,410
	Maximum Capacity	Btu/h	6,900	8,900	11,900	12,900
Heating at 5° F	Maximum Capacity	Btu/h	5,600	6,100	8,900	9,800
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V			
Voltage	Indoor-Outdoor S1 – S2		AC 208-230V			
	Indoor-Outdoor S2 – S3		DC ±24V			
Indoor Unit	MCA	A	0.25	0.30	0.40	0.54
	Fan Motor (ECM)	F.L.A.	0.20	0.24	0.32	0.43
	Airflow at Cooling (Lo — Med — Hi)	DRY (CFM)	230-265-300	230-265-335	245-315-405	300-420-475
		WET (CFM)	207-239-270	207-252-302	221-284-365	270-378-429
	Airflow at Heating (Lo — Med — Hi)	DRY (CFM)	230-265-335	230-265-335	245-315-405	300-420-475
	Sound Pressure Level at Cooling *1	dB(A)	25-28-31	25-30-34	27-34-39	32-40-43
	Sound Pressure Level at Heating *2	dB(A)				
	External Finish		Galvanized Steel Sheets; Grille: Munsell 1.0Y 9.2/0.2			
	Dimension Unit (Grille)	W: In.	22-7/16 (25-5/8)			
		D: In.	22-7/16 (25-5/8)			
		H: In.	9-1/4 (13/16)			
	Weight Unit (Grille)	Lbs.	37 (TBD)			
	Drain-lift Mechanism (Included)	H: In.	33			
	Field Drainpipe Size O.D.	In.	1-1/4			
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Outdoor Unit	MCA	A	9		10	14
	MOCP	A	15	16	18	24
	Fan Motor (ECM)	F.L.A.	0.50			0.67
	Compressor	Model (Type)	DC INVERTER-driven	DC INVERTER-driven Twin Rotary		
		R.L.A.	6.2	6.6	7.4	10.0
		L.R.A.	7.7	8.2	9.3	12.5
	Airflow (Cooling/Heating)	CFM	1,229 / 1,172		1,243 / 1,229	1,691 / 1,691
	Refrigerant Control		Linear Expansion Valve			
	Defrost Method		Reverse Cycle			
	Sound Pressure Level at Cooling *1	dB(A)	48	49		54
	Sound Pressure Level at Heating *2	dB(A)	50	51		55
	External Finish Color		Munsell No. 3Y 7.8/1.1			
	Dimensions	W: In.	31-1/2			33-1/6
		D: In.	11-1/4			13
		H: In.	21-5/8			34-5/8
	Weight	Lbs.	81			127
Refrigerant	Type		R410A			
	Charge	Lbs., Oz.	2, 5	2, 9		3, 9
	Oil	Type (fl. oz.)	FV50S (9.1)	FV50S (11.8)		
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.	In.	1/4			
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50
	Length (Max.)	Ft.	65			100
Connection Method	Indoor/Outdoor		Flared/Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | MLZ | HEAT PUMP



Model Name	Indoor Unit		MLZ-KP09NA	MLZ-KP12NA	MLZ-KP18NA
	Outdoor Unit		SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA18NA2
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	18,000
	Capacity Range	Btu/h	3,600 – 9,000	3,900 – 12,000	6,600 – 18,000
	Rated Power Input	W	710	960	1,440
	Energy Efficiency	SEER	19.5	19.8	22.3
	Moisture Removal	Pints/h	1.5	2.8	5.3
	Sensible Heat Factor		0.82	0.74	0.67
Heating at 47° F *2	Rated Capacity	Btu/h	12,000	15,400	20,000
	Capacity Range	Btu/h	4,010 – 13,000	4,600 – 17,000	8,200 – 20,000
	Rated Power Input	W	860	1,300	1,170
	HSPF (I/V)	Btu/h/W	13.3	12.1	12.4
Heating at 17° F *3	Rated Capacity	Btu/h	7,700	9,900	13,100
	Rated Power Input	W	700	1,020	1,340
	Maximum Capacity	Btu/h	7,700	9,900	13,100
Heating at 5° F	Maximum Capacity	Btu/h	6,100	7,900	10,700
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V		
Voltage	Indoor-Outdoor S1 – S2		AC 208-230V		
	Indoor-Outdoor S2 – S3		DC ±24V		
Indoor Unit	MCA	A	1		
	Fan Motor (ECM)	F.L.A.	0.76		
	Airflow at Cooling (High — Med. — Low — SLow)	DRY (CFM)	212-254-283-311	212-258-297-332	212-293-346-403
		WET (CFM)	180-216-240-264	180-219-252-282	180-249-294-343
	Airflow at Heating (High — Med. — Low — SLow)	DRY (CFM)	212-247-290-325	212-272-311-350	212-311-364-417
	Sound Pressure Level (Cooling)	dB(A)	27-31-34-38	27-32-36-40	29-36-41-47
	Sound Pressure Level (Heating)	dB(A)	26-29-34-37	26-32-36-40	26-37-42-48
	Unit/Grille External Finish		White/Ivory Munsell 3Y 7.8/1.1		
	Dimension Unit (Grille)	W: In.	43-3/8 (47-1/4)		
		D: In.	14-3/16 (16-11/16)		
		H: In.	7-5/16 (15/16+1/2)		
	Weight Unit (Grille)	Lbs.	41 (10.8)		
	Drain-lift Mechanism	H: In.	19-11/16		
	Field Drainpipe Size O.D.	In.	1-1/4		
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®		
Outdoor Unit	MCA	A	9		14
	MOCP	A	15	16	24
	Fan Motor (ECM)	F.L.A.	0.50		0.67
	Compressor	Model (Type)	DC INVERTER-driven		DC INVERTER-driven Twin Rotary
		R.L.A.	6.2	6.6	10.0
		L.R.A.	7.7	8.2	12.5
	Airflow (Cooling/Heating)	CFM	1,229 / 1,172		1,691 / 1,691
	Refrigerant Control		Linear Expansion Valve		
	Defrost Method		Reverse Cycle		
	Sound Pressure Level at Cooling *1	dB(A)	48	49	54
	Sound Pressure Level at Heating *2	dB(A)	50	51	55
	External Finish Color		Munsell No. 3Y 7.8/1.1		
	Dimensions	W: In.	31-1/2		33-1/6
		D: In.	11-1/4		13
		H: In.	21-5/8		34-5/8
	Weight	Lbs.	81		127
Refrigerant	Type		R410A		
	Charge	Lbs., Oz.	2, 5	2, 9	3, 9
	Oil	Type (fl. oz.)	FV50S (9.1)		FV50S (11.8)
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2
	Liquid Side O.D.	In.	1/4		
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40		50
	Length (Max.)	Ft.	65		100

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | SEZ SYSTEM | HEAT PUMP



Model Name	Indoor Unit		SEZ-KD09NA4	SEZ-KD12NA4	SEZ-KD15NA4	SEZ-KD18NA4
	Outdoor Unit		SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA15NA2	SUZ-KA18NA2
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	15,000	18,000
	Capacity Range	Btu/h	3,900 – 9,000	4,000 – 12,000	5,200 – 15,000	6,100 – 18,000
	Rated Power Input	W	700	930	1,150	1,310
	Energy Efficiency	SEER	18.8	20.5	19.0	20.0
	Moisture Removal	Pints/h	1.5	1.9	1.9	2.8
	Sensible Heat Factor		0.82	0.82	0.86	0.82
Heating at 47° F *2	Rated Capacity	Btu/h	12,000	15,000	18,000	21,600
	Capacity Range	Btu/h	4,200 - 12,800	4,800-16,800	5,000 - 21,600	8,100 - 25,600
	Rated Power Input	W	1,100	1,330	1,440	1,580
	HSPF (IV)	Btu/h/W	11	12.4	11.4	13.1
Heating at 17° F *3	Rated Capacity	Btu/h	7,600	10,000	11,700	13,900
	Rated Power Input	W	880	1,180	1,280	1,420
	Maximum Capacity	Btu/h	6,700	9,000	11,900	13,100
Heating at 5° F	Maximum Capacity	Btu/h	6,000	7,900	10,000	12,000
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V			
Voltage	Indoor-Outdoor S1–S2		AC 208-230V			
	Indoor-Outdoor S2–S3		DC ±24V			
Indoor Unit	MCA	A	1			
	Fan Motor (ECM)	F.L.A.	0.51	0.57	0.74	
	Airflow at Cooling (Lo – Med – Hi)	DRY (CFM)	194-247-317	247-317-388	353-441-529	423-529-635
		WET (CFM)	174-222-285	222-285-349	317-396-476	381-476-572
	Airflow at Heating (Lo – Med – Hi)	DRY (CFM)	194-247-317	247-317-388	353-441-529	423-529-635
	External Static Pressure	In. W.G.	0.02-0.06-0.14-0.20			
	Sound Pressure Level (Lo – Med – Hi)	dB(A)	23-26-30	23-28-33	30-34-37	30-34-38
	External Finish		Galvanized – Steel Sheets			
	Dimension Unit	W: In.	31-1/8	39		46-7/8
		D: In.	27-9/16			
		H: In.	7-7/8			
	Weight Unit	Lbs.	42	50	54	62
	Drain-lift Mechanism	H: In.	21-21/32			
Field Drainpipe Size O.D.	In.	1-1/4				
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Outdoor Unit	MCA	A	9		10	14
	MOCP	A	15	16	18	24
	Fan Motor (ECM)	F.L.A.	0.50		0.67	
	Compressor	Model (Type)	DC INVERTER-driven		DC INVERTER-driven Twin Rotary	
		R.L.A.	6.2	6.6	7.4	10.0
		L.R.A.	7.7	8.2	9.3	12.5
	Airflow (Cooling/Heating)	CFM	1,229 / 1,172		1,243 / 1,229	1,691 / 1,691
	Refrigerant Control		Linear Expansion Valve			
	Defrost Method		Reverse Cycle			
	Sound Pressure Level at Cooling *1	dB(A)	48	49		54
	Sound Pressure Level at Heating *2	dB(A)	50	51		55
	External Finish Color		Munsell No. 3Y 7.8/1.1			
	Dimensions	W: In.	31-1/2		33-1/6	
		D: In.	11-1/4		13	
		H: In.	21-5/8		34-5/8	
	Weight	Lbs.	81		127	
Refrigerant	Type		R410A			
	Charge	Lbs., Oz.	2, 5	2, 9		3, 9
	Oil	Type (fl. oz.)	FV50S (9.1)	FV50S (11.8)		
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.	In.	1/4			
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50
	Length (Max.)	Ft.	65			100
Connection Method	Indoor/Outdoor		Flared/Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

SINGLE-ZONE | PEAD SYSTEM | HEAT PUMP



Model Name	Indoor Unit		PEAD-A09AA7	PEAD-A12AA7	PEAD-A15AA7	PEAD-A18AA7	PEAD-A24AA7	PEAD-A30AA7	PEAD-A36AA7	
	Outdoor Unit		SUZ-KA09NA2	SUZ-KA12NA2*5	SUZ-KA15NA2	SUZ-KA18NA2	SUZ-KA24NA2	SUZ-KA30NA2	SUZ-KA36NA2	
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	15,000	18,000	24,000	27,000	33,000	
	Capacity Range	Btu/h	4,300 – 9,000	4,400 – 12,000	5,500 – 15,000	6,200 – 18,000	12,000 – 24,000	13,200 – 27,000	14,000 – 33,000	
	Rated Power Input	W	720	930	1,150	1,270	1,920	2,160	3,510	
	Energy Efficiency	SEER	19.7	20.5	19.2	19.8	18.0	18.0	16.0	
	Moisture Removal	Pints/h	0.8	1.1	1.3	3.2	4.9	3.9	4.8	
	Sensible Heat Factor		0.9	0.9	0.9	0.8	0.77	0.84	0.84	
Heating at 47° F *2	Rated Capacity	Btu/h	12,000	15,000	18,000	21,600	25,000	30,000	33,500	
	Capacity Range	Btu/h	3,960 – 13,000	4,800 – 17,000	4,900 – 21,500	8,120 – 25,600	14,400 – 28,000	15,860 – 33,000	14,750 – 36,000	
	Rated Power Input	W	900	1,160	1,350	1,600	1,990	2,410	3,170	
	HSPF (IV)	Btu/h/W	12.6	13.0	11.6	12.9	11.2	12.6	11.6	
Heating at 17° F *3	Rated Capacity	Btu/h	7,600	9,900	11,300	14,000	15,000	22,400	23,100	
	Rated Power Input	W	880	1,070	1,350	1,440	1,650	1,920	2,830	
	Maximum Capacity	Btu/h	7,600	9,900	11,300	1,400	15,000	22,400	23,100	
Heating at 5° F	Maximum Capacity	Btu/h	6,100	7,900	10,100	12,000	-	-	-	
Power Supply *4	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V							
Voltage	Indoor-Outdoor S1 – S2		AC 208-230V							
	Indoor-Outdoor S2 – S3		DC ±24V							
Indoor Unit	MCA	A	1.45			1.69		2.63	2.73	3.3
	Blower Motor (ECM)	F.L.A.	1.16			1.35		2.1	2.18	2.64
	Airflow at Cooling/Heating (Lo – Med – Hi)	DRY (CFM)	282-318-353	353-424-494		424-512-600		512-636-742	618-742-883	847-1,024-1,201
		WET (CFM)	254-286-318	318-382-445		382-461-540		461-572-667	556-668-795	762-922-1,081
	External Static Pressure	In. W.G.	0.14-0.20-0.28-0.40-0.60							
	Sound Pressure Level (Lo – Med – Hi)	dB(A)	24-26-28	28-30-34		30-33-37		30-34-39	33-38-42	
	External Finish		Galvanized							
	Dimension Unit	W: In.	35-7/16						43-5/16	55-1/8
		D: In.	28-7/8							
		H: In.	9-7/8							
	Weight Unit	Lbs.	58			62		69		86
	Drain-lift Mechanism	H: In.	27-9/16							
	Field Drainpipe Size O.D.	In.	1-1/4							
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®							
Outdoor Unit	MCA	A	9			10	14	17		
	MOCP	A	15	16	18	24	31			
	Fan Motor (ECM)	F.L.A.	0.50				0.67	1		
	Compressor	Model (Type)	DC INVERTER-driven	DC INVERTER-driven Twin Rotary				DC INVERTER-driven	DC INVERTER-driven Twin Rotary	
		R.L.A.	6.2	6.6		7.4	10.0	13.0		
		L.R.A.	7.7	8.2		9.3	12.5	16.0		
	Airflow (Cooling/Heating)	CFM	1,229 / 1,172			1,243 / 1,229	1,691 / 1,691	2,020 / 1,930		
	Refrigerant Control		Linear Expansion Valve							
	Defrost Method		Reverse Cycle							
	Sound Pressure Level at Cooling *1	dB(A)	48	49			54	55		
	Sound Pressure Level at Heating *2	dB(A)	50	51			55	55		
	External Finish Color		Munsell No. 3Y 7.8/1.1							
	Dimensions	W: In.	31-1/2				33-1/6			
		D: In.	11-1/4				13			
		H: In.	21-5/8				34-5/8			
	Weight	Lbs.	66	77	80	127 (58)	129 (59)			
Refrigerant	Type		R410A							
	Charge	Lbs., Oz.	2, 5	2, 9			3, 9	4, 14		
	Oil	Type (fl. oz.)	FV50S (9.1)	FV50S (11.8)				FV50S (15.6)		
Refrigerant Pipe	Gas Side O.D.	In.	3/8			1/2		5/8		
	Liquid Side O.D.	In.	1/4							
Refrigerant Pipe Length	Height Difference (Max.)	Ft.	40			50		100		
	Length (Max.)	Ft.	65			100				
Connection Method	Indoor/Outdoor		Flared/Flared							

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*5. Port adapter (MAC-A455JP-E) is needed for PEAD-A12AA7 connection with SUZ-KA12NA2.

Specifications are subject to change without notice.

LIMITED WARRANTY I Five years parts and seven years compressor.

MULTI-ZONE | MXZ-C | HEAT PUMP



Model Name		Outdoor Unit		MXZ-2C20NA2 *5	MXZ-3C24NA2 *5	MXZ-3C30NA2	MXZ-4C36NA2 *6	MXZ-5C42NA2	
Indoor Unit	Cooling *1 Non-ducted/ Ducted	Rated Capacity	Btu/h	18,000/20,000	22,000/23,600	28,400/27,400	35,400/34,400	40,500/37,500	
		Capacity Range	Btu/h	5,700–20,000	12,600–22,000 / 12,600–25,500	12,600–28,400 / 12,600–27,400	12,600–36,400 / 12,600–34,800	6,000–43,000	
		Rated Power Input	W	1,417/ 2,000	1,620/2,100	2,680/2,840	3,760/3,940	4,403/4,112	
	Heating at 47° F *2 Non-ducted/ Ducted	Rated Capacity	Btu/h	22,000	25,000/24,600	28,600/27,600	36,000/34,400	45,000/41,000	
		Capacity Range	Btu/h	7,400 - 25,000	11,400–30,600/ 11,400–29,400	11,400–36,000/ 11,400–35,000	11,400–43,000/ 11,400–41,400	7,200–53,600	
		Rated Power Input	W	1,641/ 1,771	1,750/1,900	2,150/2,220	3,020/3,100	3,575/3,463	
	Heating at 17° F *3 Non-ducted/ Ducted	Rated Capacity	Btu/h	12,500/ 13,500	14,000/14,000	16,000/15,100	22,200/20,300	24,400/23,000	
		Maximum Capacity	Btu/h	15,500/14,500	19,600/19,600	21,000/21,000	26,600/26,600	30,500/29,100	
		Rated Power Input	W	1,300/1,350	2,120/2,230	2,120/2,140	3,340/3,450	2,943/2,869	
	Heating at 5° F	Maximum Capacity	Btu/h	11,100/10,900	18,200	18,200	24,000	26,000	
Power Supply *7		Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V					
Voltage		Indoor-Outdoor S1–S2		AC 208 / 230V					
		Indoor-Outdoor S2–S3		DC ±24V					
Outdoor Unit *4		MCA	A	17.2	22.1		22.1	32.5	
		MOCP	A	20	25		40		
		Fan Motor (ECM)	F.L.A.	1.77	2.43				
		Compressor	Model (Type)	DC INVERTER-driven Twin Rotary					
			R.L.A.	10.7	12				20
			L.R.A.	15.5	13.7				28.8
		Airflow (Cooling/Heating)	CFM	1,342/1,458			2,068/1,605	1,365/1,605	2,118/2,542
		Refrigerant Control		Linear Expansion Valve					
		Defrost Method		Reverse Cycle					
		Sound Pressure Level at Cooling *1	dB(A)	50	51	52	54	56	
		Sound Pressure Level at Heating *2	dB(A)	54	55	56		58	
		External Finish Color		Munsell No. 3.0Y 7.8 / 1.1					
		Dimensions	W: In.	33-1/16		37-13/32			
			D: In.	13					
			H: In.	27-15/16	31-11/32				41-9/32
		Weight	Lbs.	126	137	137		139	189
Indoor Unit		No. of Units		2	2, 3		2, 3, 4	2,3,4,5	
Remote Controller		Type		Associated with the Indoor Unit					
Refrigerant		Type		R410A					
		Charge	Lbs., Oz.	3, 15	6, 13				8, 13
		Oil	Type (fl. oz.)	NE022 (20.3)	FV50S (24.7)				FV50S (37.4)
Refrigerant Pipe		Gas Side O.D.	In.	A, B: 3/8	A: 1/2; B C: 3/8	A: 1/2; B, C: 3/8	A: 1/2; B, C, D: 3/8	A: 1/2; B,C,D,E: 3/8	
		Liquid Side O.D.	In.	1/4					
Max Refrigerant Line Length		Ft.		164	230				
Max. Piping Length for Each Indoor Unit				82					
Max. Refrigerant Pipe Height Difference		If IDU is Above ODU	Ft.	49					
		If IDU is Below ODU	Ft.	33	49				
Connection Method		Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. Systems actually exhibit higher energy efficiencies during normal operation.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Refer to pages 47–55 for Indoor Unit specifications.

*5. Data from combination of two Indoor Units 6,000 Btu/h and one 9,000 Btu/h (non-ducted) or three 9,000 Btu/h (ducted).

*6. Data from combination of four Indoor Units 9,000 Btu/h (non-ducted and ducted).

*7. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | MXZ-C | HEAT PUMP



Model Name		Outdoor Unit		MXZ-8C48NA *8	MXZ-8C60NA *8
Indoor Unit	Cooling *1 Non-ducted/ Ducted	Rated Capacity	Btu/h	48,000/48,000	60,000/60,000
		Capacity Range	Btu/h	6,000–48,000	6,000–60,000
		Rated Power Input	W	4,000/5,050	4,800/6,250
	Heating at 47° F *2 Non-ducted/ Ducted	Rated Capacity	Btu/h	54,000/54,000	66,000/66,000
		Capacity Range	Btu/h	7,200–54,000	7,200–66,000
		Rated Power Input	W	4,220/4,990	4,870/4,750
	Heating at 17° F *3 Non-ducted/ Ducted	Rated Capacity	Btu/h	36,600/36,600	41,500/40,500
		Maximum Capacity	Btu/h	36,600/36,600	65,000/58,000
		Rated Power Input	W	3,720/4,420	4,870/4,750
	Heating at 5° F Non-ducted/ Ducted	Maximum Capacity	Btu/h	57,000/42,000	57,000/42,000
Power Supply *7		Phase, Cycle, Voltage		1-phase, 60Hz, 208/230V	
Voltage		Indoor-Outdoor S1–S2		AC 208/230V	
		Indoor-Outdoor S2–S3		DC ±24V	
Outdoor Unit *4		MCA	A	37	46
		MOCP	A	52	52
		Compressor	Model (Type)	DC INVERTER-driven Scroll Hermetic	
			R.L.A.	19	18
			L.R.A.	22	29
		Airflow (Cooling/Heating)	CFM	3,885	4,879
		Refrigerant Control		Linear Expansion Valve	
		Defrost Method		Reverse Cycle	
		Sound Pressure Level at Cooling *1	dB(A)	51	58
		Sound Pressure Level at Heating *2	dB(A)	54	59
		External Finish Color		Munsell No. 3.0Y 7.8/1.1	
		Dimensions	W: In.	41-11/32	
			D: In.	13+1	
			H: In.	52-11/16	
		Weight	Lbs.	269	309
Indoor Unit	No. of Units			2, 3, 4, 5, 6, 7, 8	2, 3, 4, 5, 6*, 7, 8
Remote Controller	Type			Associated with the Indoor Unit	
Refrigerant	Type			R410A	
	Charge	Lbs., Oz.		10, 9	11, 4
	Oil	Type (fl. oz.)		FV50S (73)	
Refrigerant Pipe	Gas Side O.D.	In.		5/8	3/4
	Liquid Side O.D.	In.		3/8	
Max Refrigerant Line Length		Ft.		492	
Max. Piping Length for Each Indoor Unit				262	
Max. Refrigerant Pipe Height Difference	If IDU is Above ODU	Ft.		131**	131**
	If IDU is Below ODU	Ft.		164**	164**
Connection Method	Indoor/Outdoor			Flared/Flared	

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. Systems actually exhibit higher energy efficiencies during normal operation.

*1. Rating conditions (cooling)—Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)—Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating)—Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Refer to pages 47–55 for Indoor Unit specifications.

*5. Data from combination of two Indoor Units 6,000 Btu/h and one 9,000 Btu/h (non-ducted) or three 9,000 Btu/h (ducted).

*6. Data from combination of four Indoor Units 9,000 Btu/h (non-ducted and ducted).

*7. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*8. MXZ-8C48NA and MXZ-8C60NA require branch box for operation.

* When the system includes one or more PLA-A-EA7, the number of the maximum connectable indoor units is decreased as follows: 3 for MXZ-4C36NAHZ, 4 for MXZ-5C42NAHZ, and 6 for MXZ-8C48NA(HZ) and MXZ-8C60NA.

** Branch Box should be placed within the level between the outdoor unit and indoor units.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

Model Name			PAC-MKA31BC	PAC-MKA51BC
Connectable No. of Indoor Units			3	5
Power Supply	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V	
Power Input	W		3	
Current		A	0.05	
External Finish			Galvanized-Steel Sheets	
Dimensions	Width	In.	17-2 3/32	
	Depth	In.	11-1/32	
	Height	In.	6-11/16	
Net Weight		Lbs.	15	16
Refrigerant Pipe Dimensions	Outdoor Unit to Branch Box	Gas (In.)	5/8	
		Liquid (In.)	3/8	
	Branch Box to Indoor Units	Gas (In.)	A,B,C: 3/8	A, B, C, D: 3/8; E: 1/2
		Liquid (In.)	A,B,C: 1/4	A, B, C, D, E: 1/4

Only a single lineset is needed from the outdoor unit to branch box.
Branch Boxes: (At least one branch box required)



PAC-MKA31BC



PAC-MKA51BC

MULTI-ZONE | MXZ-C | H2i HEAT PUMP



Model Name		Outdoor Unit		MXZ-2C20NAHZ2	MXZ-3C24NAHZ2	MXZ-3C30NAHZ2		
Indoor Units	Cooling *1 Non-ducted/ Ducted	Rated Capacity	Btu/h	18,000 / 20,000	22,000 / 23,600	28,400 / 27,400		
		Capacity Range	Btu/h	6,000 – 20,000	6,000 – 23,600	6,000 – 28,400		
		Rated Power Input	W	1,334 / 1,819	1,630 / 2,360	2,272 / 2,661		
	Heating at 47° F *2 Non-ducted/Ducted	Rated Capacity	Btu/h	22,000 / 22,000	25,000 / 24,600	28,600 / 27,600		
		Capacity Range	Btu/h	7,400 - 25,500	7,200 - 30,600	7,200 - 36,000		
		Rated Power Input	W	1,612 / 1,748	1,725 / 1,871	2,096 / 2,187		
	Heating at 17° F *3 Non-ducted/Ducted	Rated Capacity	Btu/h	13,700 / 13,700	14,000 / 14,000	18,000 / 16,500		
		Maximum Capacity	Btu/h	22,000 / 22,000	25,000 / 24, 600	28,600 / 27, 600		
		Rated Power Input	W	1,450 / 1,588	1,622 / 1,635	1,991 / 1,993		
Heating at 5° F	Maximum Capacity	Btu/h	22,000	25,000	28,600			
Power Supply *5		Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V				
Voltage		Indoor - Outdoor S1 - S2		AC 208 / 230V				
		Indoor - Outdoor S2 - S3		DC ±24V				
Outdoor Unit *4		MCA	A	29.5	30.5			
		MOCP	A	40				
		Fan Motor (ECM)	F.L.A.	2.43				
		Compressor	Model (Type)	DC INVERTER-driven Twin Rotary				
			R.L.A.	12				
			L.R.A.	28.8				
		Airflow (Cooling/Heating)	CFM	2,118 / 2,542	2,118 / 2,542	2,224 / 2,542		
		Refrigerant Control		Linear Expansion Valve				
		Defrost Method		Reverse Cycle				
		Sound Pressure Level at Cooling *1		dB(A)	54			
		Sound Pressure Level at Heating *2		dB(A)	58			
		External Finish Color		Munsell No. 3.0Y 7.8 / 1.1				
		Dimensions	W: In.	37-13/32				
			D: In.	13				
			H: In.	41-9/32				
		Weight		Lbs.	187	189		
Indoor Unit		No. of Units		2	2, 3	2, 3		
Remote Controller		Type		Associated with the Indoor Unit				
Refrigerant		Type		R410A				
		Charge	Lbs., Oz.	6, 13				
		Oil	Type (fl. oz.)	FV50S (24.7)				
Refrigerant Pipe		Gas Side O.D.	In.	A,B: 3/8	A: 1/2; B,C: 3/8	A: 1/2; B,C: 3/8		
		Liquid Side O.D.	In.	1/4				
Max Refrigerant Line Length		Ft.		164	230			
Max. Piping Length for Each Indoor Unit					82			
Max. Refrigerant Pipe Height Difference		If IDU is Above ODU	Ft.	49				
		If IDU is Below ODU	Ft.	49				
Connection Method		Indoor/Outdoor		Flared/Flared				

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Refer to pages 47–55 for Indoor Unit specifications.

*5. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | MXZ-C | H2i HEAT PUMP



Model Name		Outdoor Unit		MXZ-4C36NAHZ *6	MXZ-5C42NAHZ *6	MXZ-8C48NAHZ *6
Indoor Unit	Cooling *1 Non-ducted/Ducted	Rated Capacity	Btu/h	36,000 / 36,000	42,000 / 42,000	48,000 / 48,000
		Capacity Range	Btu/h	6,000 – 36,000	6,000 – 42,000	6,000 – 48,000
		Rated Power Input	W	2,570 / 3,180	3,130 / 3,890	4,000 / 5,050
	Heating at 47° F *2 Non-ducted/Ducted	Rated Capacity	Btu/h	45,000 / 45,000	48,000 / 48,000	54,000 / 54,000
		Capacity Range	Btu/h	7,200 - 45,000	7,200 - 48,000	7200 - 54,000
		Rated Power Input	W	3,340 / 4,250	3,430 / 4,350	4,220 / 4,990
	Heating at 17° F *3 Non-ducted/Ducted	Rated Capacity	Btu/h	34,000 / 36,000	35,800 / 36,600	40,000 / 43,000
		Maximum Capacity	Btu/h	45,000 / 45,000	48,000 / 48,000	54,000 / 54,000
		Rated Power Input	W	3,500 / 4,590	3,650 / 4,290	4,340 / 5,250
	Heating at 5° F	Maximum Capacity	Btu/h	45,000	48,000	54,000
Power Supply		Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V		
Voltage		Indoor — Outdoor S1 – S2		AC 208 / 230V		
		Indoor — Outdoor S2 – S3		DC ±24V		
Outdoor Unit *4		MCA	A	42		
		MOCP	A	52		
		Fan Motor (ECM)	F.L.A.	0.4+0.4		
		Compressor	Model (Type)	DC INVERTER-driven Scroll Hermetic		
			R.L.A.	19		
			L.R.A.	22		
		Airflow (Cooling/Heating)	CFM	3,885 / 3,885		
		Refrigerant Control		Linear Expansion Valve		
		Defrost Method		Reverse Cycle		
		Sound Pressure Level at Cooling *1	dB(A)	49	50	51
		Sound Pressure Level at Heating *2	dB(A)	53	54	54
		External Finish Color		Munsell No. 3Y 7.8/1.1		
		Dimensions	W: In.	41-11/32		
			D: In.	13+1		
			H: In.	52-11/16		
		Weight	Lbs.	276		
Indoor Unit		No. of Units		2,3*,4	2,3,4*,5	2,3,4,5,6*,7,8
Remote Controller		Type		Associated with indoor unit		
Refrigerant		Type		R410A		
		Charge	Lbs., Oz.	10, 9		
		Oil	Type (fl. oz.)	FV50S (3.7)	FV50S (37.4)	FV50S (73)
Refrigerant Pipe		Gas Side O.D.	In.	5/8		
		Liquid Side O.D.	In.	3/8		
Max Refrigerant Line Length			Ft.	492		
Max. Piping Length for Each Indoor Unit				262		
Max. Refrigerant Pipe Height Difference		If IDU is Above ODU	Ft.	131**		
		If IDU is Below ODU	Ft.	164**		
Connection Method		Indoor/Outdoor		Flared/Flared		

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. Systems actually exhibit higher energy efficiencies during normal operation.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4. Refer to pages 47–55 for Indoor Unit specifications.

*5. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*6. MXZ-4C36NAHZ, MXZ-5C42NAHZ and MXZ-8C48NAHZ require branch box for operation.

* When the system includes one or more PLA-A-EA7, the number of the maximum connectable indoor units is decreased as follows: 3 for MXZ-4C36NAHZ, 4 for MXZ-5C42NAHZ, and 6 for MXZ-8C48NAHZ and MXZ-8C60NA.

** Branch box should be placed within the level between the outdoor unit and indoor units.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

Only a single lineset is needed from the outdoor unit to branch box.
Branch Boxes: (At least one branch box required)

Model Name			PAC-MKA31BC	PAC-MKA51BC
Connectable No. of Indoor Units			3	5
Power Supply	Phase, Cycle, Voltage		1 Phase, 60Hz, 208 / 230V	
Power Input		W	3	
Current		A	0.05	
External Finish			Galvanized-Steel Sheets	
Dimensions	Width	In.	17-23/32	
	Depth	In.	11-1/32	
	Height	In.	6-11/16	
Net Weight		Lbs.	15	16
Refrigerant Pipe Dimensions	Outdoor Unit to Branch Box	Gas (In.)	5/8	
		Liquid (In.)	3/8	
	Branch Box to Indoor Units	Gas (In.)	A,B,C: 3/8	A, B, C, D: 3/8; E: 1/2
		Liquid (In.)	A,B,C: 1/4	A, B, C, D, E: 1/4



PAC-MKA31BC



PAC-MKA51BC

MULTI-ZONE | MSZ-FH | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		MSZ-FH06NA	MSZ-FH09NA	MSZ-FH12NA	MSZ-FH15NA	MSZ-FH18NA2
Cooling *1	Rated Capacity	Btu/h	6,000	9,000	12,000	15,000	17,200
Heating at 47° F *2	Rated Capacity	Btu/h	8,700	10,900	13,600	18,000	20,300
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V				
Voltage	Indoor-Outdoor S1 – S2		AC 208 / 230V				
	Indoor-Outdoor S2 – S3		DC ±24V				
	MCA	A	1.0				
Fan	Blower Motor	F.L.A.	0.67				
	Airflow at Cooling (Quiet – Lo – Med – Hi – Super Hi)*1	DRY (CFM)	137-167-221-304-381	137-167-221-304-381	137-167-221-304-398	225-262-304-355-411	225-262-304-355-459
		WET (CFM)	117-143-190-261-328	117-143-190-261-328	117-143-190-261-342	194-225-261-305-354	194-225-261-305-395
	Airflow at Heating (Quiet – Lo – Med – Hi – Super Hi) *2	DRY (CFM)	140-167-225-325-437	140-167-225-325-437	140-167-225-325-454	201-254-317-394-497	201-254-317-394-514
Sound Pressure Level at Cooling (Quiet – Lo – Med – Hi – Super – Hi) *1		dB(A)	20-23-29-36-40	20-23-29-36-40	21-24-29-36-41	27-31-35-39-44	27-31-35-39-47
Sound Pressure Level at Heating (Quiet – Lo – Med – Hi – Super Hi) *2		dB(A)	20-24-29-36-42	20-24-29-36-42	21-24-29-36-42	25-29-34-39-46	25-29-34-39-46
External Finish Color			Munsell 1.0Y 9.2 / 0.2				
Dimension Unit		W: In.	36-7/16				
		D: In.	9-3/16				
		H: In.	12(+11/16)				
Weight Unit		Lbs.	29				
Field Drainpipe Size O.D.		In.	5/8				
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®				
Refrigerant	Type		R410A				
Refrigerant Pipe	Gas Side O.D.	In.	3/8			1/2	
	Liquid Side O.D.	In.	1/4				
Connection Method	Indoor/Outdoor		Flared/Flared				

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | MSZ-GL | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		MSZ-GL06NA	MSZ-GL09NA	MSZ-GL12NA	MSZ-GL15NA	MSZ-GL18NA	MSZ-GL24NA
Cooling *1	Rated Capacity	Btu/h	6,000	9,000	12,000	14,000	18,000	22,400
Heating at 47° F *2	Rated Capacity	Btu/h	7,200	10,900	14,400	18,000	21,600	27,600
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V					
Voltage	Indoor - Outdoor S1 - S2		AC 208 / 230V					
	Indoor - Outdoor S2 - S3		DC ±24V					
	MCA	A	1.0					
Fan	Blower Motor	F.L.A.	0.76				0.67	0.76
	Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi)*1	DRY (CFM)	145-170-237-321-399	145-170-237-321-399		205-272-335-420-533	258-332-416-523-646	388-469-544-628-738
		WET (CFM)	109-134-201-286-364	109-134-201-286-364		170-237-300-385-498	232-299-375-470-581	347-420-487-562-661
	Airflow at Heating (Quiet-Lo-Med-Hi-Super Hi) *2	DRY (CFM)	145-170-237-321-406	145-170-237-321-406		205-247-304-367-463	297-385-469-563-646	388-469-544-628-738
Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1		dB(A)	19-22-30-37-43	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-45-49-53
Sound Pressure Level at Heating (Quiet-Lo-Med-Hi-Super Hi) *2		dB(A)	19-22-30-37-43	19-22-30-37-43		26-30-35-40-46	28-33-38-43-48	32-41-45-49-52
External Finish Color			Munsell 1.0Y 9.2 / 0.2					
Dimension Unit		W: In.	31-7/16				36-5/16	43-5/16
		D: In.	9-1/8				9-13/16	9-3/8
		H: In.	11-5/8				12	12-13/16
Weight Unit		Lbs.	22				28	37
Field Drainpipe Size O.D.		In.	5/8					
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®					
Refrigerant	Type		R410A					
Refrigerant Pipe	Gas Side O.D.	In.	3/8			1/2		5/8
	Liquid Side O.D.	In.	1/4					3/8
Connection Method	Indoor/Outdoor		Flared/Flared					

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Indoor units receive power from outdoor units through field-supplied wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

MULTI-ZONE | MSZ-EF | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		MSZ-EF09NAW(S)(B)	MSZ-EF12NAW(S)(B)	MSZ-EF15NAW(S)(B)	MSZ-EF18NAW(S)(B)
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,000	17,200
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	14,400	18,000	21,600
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208/230V			
Voltage	Indoor-Outdoor S1－S2		AC 208/230V			
	Indoor-Outdoor S2－S3		DC ±24V			
	MCA	A	1.0			
Fan	Blower Motor	F.L.A.	0.67			
	Airflow at Cooling (Quiet－Lo－Med－Hi－Super Hi)*1	DRY (CFM)	141-162-222-293-371	141-162-222-293-371	205-233-272-314-364	205-240-279-328-388
		WET (CFM)	121-140-191-252-319	121-140-191-252-319	176-200-234-270-313	176-206-240-282-334
	Airflow at Heating (Quiet－Lo－Med－Hi－Super Hi) *2	DRY (CFM)	141-162-219-314-420	141-162-219-314-448	194-222-275-350-448	226-258-318-392-466
Sound Pressure Level at Cooling (Quiet－Lo－Med－Hi－Super Hi) *1		dB(A)	21-23-29-36-42	21-24-29-36-42	28-31-35-39-42	30-33-36-40-43
Sound Pressure Level at Heating (Quiet－Lo－Med－Hi－Super Hi) *2		dB(A)	21-24-29-37-45	21-24-30-38-46	28-30-35-41-48	30-33-37-43-49
External Finish Color			W: Munsell 1.0Y 9.2/0.2 S: Munsell 3.1PB 8.2/0.2 B: Munsell 3.7PB 2.0/0.1			
Dimension Unit		W: In.	34-13/16			
		D: In.	7-11/16			
		H: In.	11-3/4			
Weight Unit		Lbs.	26			
Field Drainpipe Size O.D.		In.	5/8			
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Refrigerant	Type		R410A			
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.	In.	1/4			
Connection Method	Indoor / Outdoor		Flared / Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Indoor units receive power from outdoor units through field-supplied wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

For data on specific indoor unit combinations, visit www.mitsubishipro.com/multizone

MULTI-ZONE | MFZ-KJ | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		MFZ-KJ09NA	MFZ-KJ12NA	MFZ-KJ15NA	MFZ-KJ18NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	15,000	17,000
Heating at 47° F *2	Rated Capacity	Btu/h	11,000	13,000	18,000	21,000
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208/230V			
Voltage	Indoor-Outdoor S1-S2		AC 208/230V			
	Indoor-Outdoor S2-S3		DC ±24V			
	MCA	A	1.0			
Fan	Motor FLA	A	0.62			0.72
	Motor Output	W	30			40
	Airflow at Cooling (Quiet — Lo — Med — Hi — Super Hi) *1	DRY (CFM)	138-173-208-251-275			198-237-282-328-374
		WET (CFM)	117-147-177-213-234			168-201-240-279-318
	Airflow at Heating (Quiet — Lo — Med — Hi — Super Hi) *2	DRY (CFM)	138-159-180-219-343			212-254-290-325-470
Sound Pressure Level at Cooling (Quiet — Lo — Med — Hi — Super Hi) *1		dB(A)	21-25-30-34-38			28-31-36-40-43
Sound Pressure Level at Heating (Quiet — Lo — Med — Hi — Super Hi) *2		dB(A)	21-24-27-32-41			29-34-36-39-49
External Finish Color			Munsell 1.0Y 9.2 / 0.2			
Dimension Unit	W: In.		29-17/32			
	D: In.		8-15/32			
	H: In.		23-5/8			
Weight Unit		Lbs.	33			
Field Drainpipe Size O.D.		In.	5/8			
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Refrigerant	Type		R410A			
Refrigerant Pipe	Gas Side O.D.	In.	3/8			1/2
	Liquid Side O.D.	In.	1/4			
Connection Method	Indoor/Outdoor		Flared / Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3. Indoor units receive power from outdoor units through field-supplied wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | SVZ | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		SVZ-KP12NA	SVZ-KP18NA	SVZ-KP24NA	SVZ-KP30NA	SVZ-KP36NA
Cooling *1	Rated Capacity	Btu/h	12,000	18,000	24,000	27,000	33,000
Heating at 47° F *2	Rated Capacity	Btu/h	15,000	21,600	25,000	30,000	33,500
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V				
Voltage	Indoor-Outdoor S1－S2		AC 208－230V				
	Indoor-Outdoor S2－S3		DC ±24V				
	MCA	A	3			4.13	
Fan	Airflow at Cooling (Lo－Med－Hi)	DRY (CFM)	278-381-448	471-573-675	515-625-735	613-744-875	767-910-910
	Airflow at Heating (Lo－Med－Hi)	DRY (CFM)	278-381-448	471-573-675	515-625-735	613-744-875	767-910-910
	External Static Pressure	In. W.G.	0.3 - 0.5 - 0.8				
Sound Pressure Level at Cooling/Heating (Lo－Med－Hi) *1		dB(A)	29-36-39	33-36-41	30-34-38	32-46-40	35-39-43
External Finish Color			Black				
Remote Controller		Type	Compatible with multiple controls options including kumo cloud®				
Dimension Unit		W: In.	17			21	
		D: In.	21-5/8				
		H: In.	39-13/16			43-3/4	
Weight Unit		Lbs.	93			119	
Refrigerant	Type		R410A				
Refrigerant Pipe	Gas Side O.D.	In.	3/8	1/2	5/8		
	Liquid Side O.D.	In.	1/4		3/8		
Connection Method	Indoor/Outdoor		Flared/Flared				

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

*3. Indoor units receive power from outdoor units through field-supplied wiring.

*4. External static pressure is factory set to 0.5" W.G. at factory shipment.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | SLZ | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		SLZ-KF09NA	SLZ-KF12NA	SLZ-KF15NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	14,100
Heating at 47° F *2	Rated Capacity	Btu/h	11,000	13,000	18,000
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208/230V		
Voltage	Indoor-Outdoor S1 – S2		AC 208/230V		
	Indoor-Outdoor S2 – S3		DC ±24V		
	MCA	A	0.25	0.30	0.40
Fan	Fan Motor (ECM)	F.L.A.	0.20	0.24	0.32
	Airflow at Cooling (Lo – Med – Hi)	DRY (CFM)	230-265-300	230-265-335	245-315-405
		WET (CFM)	207-239-270	207-252-302	221-284-365
	Airflow at Heating (Lo – Med – Hi)	DRY (CFM)	230-265-335	230-265-335	245-315-405
Sound Pressure Level at Cooling *1		dB(A)	25-28-31	25-30-34	27-34-39
Sound Pressure Level at Heating *2		dB(A)			
Grille/Unit External Finish Color			Galvanized Steel Sheets / Grille: Munsell 1.0Y 9.2/0.2		
Dimension Unit (Grille)		W: In.	22-7/16		
		D: In.	22-7/16		
		H: In.	9-1/4		
Weight Unit (Grille)		Lbs.	37		
Drain-lift Mechanism (Included)		In.	33		
Field Drainpipe Size O.D.		In.	1-1/4		
Remote Controller		Type	Compatible with multiple controls options including kumo cloud®		
Refrigerant	Type		R410		
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2
	Liquid Side O.D.	In.	1/4		
Connection Method	Indoor/Outdoor		Flared/Flared		

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).


*3. Indoor units receive power from outdoor units through field supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | MLZ | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		MLZ-KP09NA	MLZ-KP12NA	MLZ-KP18NA
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	18,000
Heating at 47° F *2	Rated Capacity	Btu/h	12,000	15,000	21,000
Power Supply *3	Phase, Cycle, Voltage		1-phase, 60Hz, 208 / 230V		
Voltage	Indoor-Outdoor S1 – S2		AC 208–230V		
	Indoor-Outdoor S2 – S3		±24VDC		
	MCA	A	1.0		
Fan	Fan Motor (ECM)	F.L.A.	0.68		
	Airflow at Cooling (Lo – Med – Hi)	DRY (CFM)	212-254-283-311	212-258-297-332	212-293-346-403
		WET (CFM)	180-216-240-264	180-219-252-282	180-249-294-343
	Airflow at Heating (Lo – Med – Hi)	DRY (CFM)	212-247-290-325	212-272-311-350	212-311-364-417
Sound Pressure Level at Cooling *1		dB(A)	27-31-34-38	27-32-36-40	29-36-41-47
Sound Pressure Level at Heating *2		dB(A)	26-29-34-37	26-32-36-40	26-37-42-48
Grille/Unit External Finish Color			White/Ivory Munsell 3Y 7.8/1.1		
Dimension Unit (Grille)		W: In.	43-3/8 (47-1/4)		
		D: In.	14-3/16 (16-11/16)		
		H: In.	7-5/16 (15/16+1/2)		
Weight Unit (Grille)		Lbs.	41 (10.8)		
Drain-lift Mechanism (Included)		In.	19-11/16		
Field Drainpipe Size O.D.			1		
Remote Controller			Compatible with multiple controls options including kumo cloud®		
Refrigerant	Type		R410A		
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2
	Liquid Side O.D.	In.	1/4		
Connection Method	Indoor/Outdoor		Flared/Flared		

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling) — Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2. Rating conditions (heating) — Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).


*3. Indoor units receive power from outdoor units through field-supplied wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | SEZ | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		SEZ-KD09NA4	SEZ-KD12NA4	SEZ-KD15NA4	SEZ-KD18NA4
Cooling *1	Rated Capacity	Btu/h	8,100	11,500	14,100	17,200
Heating at 47° F *2	Rated Capacity	Btu/h	10,900	13,600	18,000	21,600
Power Supply *4	Phase, Cycle, Voltage		1-Phase, 60Hz, 208/230V			
Voltage	Indoor-Outdoor S1 – S2		AC 208–230V			
	Indoor-Outdoor S2 – S3		DC ±24V			
	MCA	A	1.0			
Fan	Blower Motor (ECM)	F.L.A.	0.51	0.57	0.74	
	Airflow at Cooling/Heating (Lo — Med — Hi)	DRY (CFM)	194-247-317	247-317-388	353-441-529	423-529-635
		WET (CFM)	174-222-285	222-285-349	317-396-476	381-476-572
	External Static Pressure		In. W.G.	0.02-0.06-0.14-0.20		
Sound Pressure Levels (Lo — Med — Hi)		dB(A)	23-26-30	23-28-33	30-34-37	30-34-38
External Finish			Galvanized-steel Sheets			
Dimension		W: In.	31-1/8	39		46-7/8
		D: In.	27-9/16			
		H: In.	7-7/8			
Weight		Lbs.	42	50	54	62
Drain-lift Mechanism (Included)		H: In.	21-11/16			
Field Drainpipe Size O.D.		In.	1-1/4			
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®			
Refrigerant	Type		R410A			
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2	
	Liquid Side O.D.		1/4			
Connection Method			Flared/Flared			

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

*3. External static pressure is factory set to 0.06" W.G. Adjustable via remote controller.


*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

MULTI-ZONE | PEAD | HEAT PUMP

(FOR MXZ-C OUTDOOR UNITS)



Model Name	Indoor Unit		PEAD-A09AA7	PEAD-A12AA7	PEAD-A15AA7	PEAD-A18AA7	PEAD-A24AA7	PEAD-A30AA7	PEAD-A36AA7
Cooling *1	Rated Capacity	Btu/h	9,000	12,000	15,000	18,000	24,000	27,000	33,000
Heating at 47° F *2	Rated Capacity	Btu/h	12,000	15,000	18,000	21,600	25,000	30,000	33,500
Power Supply *4	Phase, Cycle, Voltage		1-Phase, 60Hz, 208/230V						
Voltage	Indoor-Outdoor S1 – S2		AC 208–230V						
	Indoor-Outdoor S2 – S3		DC ±24V						
	MCA	A	1.45		1.69		2.63	2.73	3.3
Fan	Blower Motor (ECM)	F.L.A.	1.16		1.35		2.1	2.18	2.64
	Airflow at Cooling/Heating (Lo — Med — Hi)	DRY (CFM)	282-318-353	353-424-494	424-512-600		512-636-742	618-742-883	847-1,024-1,201
		WET (CFM)	254-286-318	318-382-445	382-461-540		461-572-667	556-668-795	762-922-1,081
	External Static Pressure	In. W.G.	0.14-0.20-0.28-0.40-0.60						
Sound Pressure Levels (Lo — Med — Hi)		dB(A)	24-26-28	28-30-34	30-33-37			30-34-39	33-38-42
External Finish			Galvanized						
Dimension	W: In.	35-7/16						43-5/16	55-1/8
	D: In.	28-7/8							
	H: In.	9-7/8							
Weight	Lbs.	58		62		69		86	
Drain-lift Mechanism (Included)		H: In.	27-9/16						
Field Drainpipe Size O.D.		In.	1-1/4						
Remote Controller	Type		Compatible with multiple controls options including kumo cloud®						
Refrigerant	Type		R410A						
Refrigerant Pipe	Gas Side O.D.	In.	3/8		1/2		5/8		
	Liquid Side O.D.		1/4			3/8			
Connection Method			Flared/Flared						

NOTES: Test conditions are based on AHRI 210/240.

*1. Rating conditions (cooling)-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2. Rating conditions (heating)-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

*3. External static pressure is factory set to 0.06" W.G. Adjustable via remote controller.

*4. Indoor units receive power from outdoor units through field-supplied interconnected wiring.


Specifications are subject to change without notice.

LIMITED WARRANTY | Five years parts and seven years compressor.

ADDITIONAL M-SERIES INFORMATION

PORT ADAPTERS PART NUMBERS

Model Name	Diameter A	Diameter B
MAC-A454JP-E	3/8"	1/2"
MAC-A455JP-E	1/2"	3/8"
MAC-A456JP-E	1/2"	5/8"
PAC-SG76RJ-E	3/8"	5/8"
ADP5834	5/8"	3/4"
PAC-493PI	1/4"	3/8"

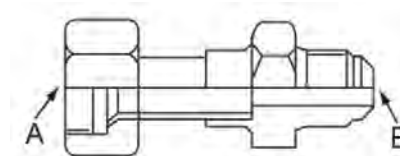

Diameter A = Female

Diameter B = Male

PORT ADAPTER GUIDE

Available Indoor Units	Line Set Size
MSZ Wall-mounted	
MSZ-FH06NA	3/8" gas x 1/4" liquid
MSZ-FH09NA	3/8" gas x 1/4" liquid
MSZ-FH12NA	3/8" gas x 1/4" liquid
MSZ-FH15NA	1/2" gas x 1/4" liquid
MSZ-FH18NA2	1/2" gas x 1/4" liquid
MSZ-GL06NA	3/8" gas x 1/4" liquid
MSZ-GL09NA	3/8" gas x 1/4" liquid
MSZ-GL12NA	3/8" gas x 1/4" liquid
MSZ-GL15NA	1/2" gas x 1/4" liquid
MSZ-GL18NA	1/2" gas x 1/4" liquid
MSZ-GL24NA	5/8" gas x 3/8" liquid
MSZ-EF09NAW(S)(B)	3/8" gas x 1/4" liquid
MSZ-EF12NAW(S)(B)	3/8" gas x 1/4" liquid
MSZ-EF15NAW(S)(B)	1/2" gas x 1/4" liquid
MSZ-EF18NAW(S)(B)	1/2" gas x 1/4" liquid
MFZ Floor-standing	
MFZ-KJ09NA	3/8" gas x 1/4" liquid
MFZ-KJ12NA	3/8" gas x 1/4" liquid
MFZ-KJ15NA	1/2" gas x 1/4" liquid
MFZ-KJ18NA	1/2" gas x 1/4" liquid
SVZ Multi-position	
SVZ-KP12NA	3/8" gas x 1/4" liquid
SVZ-KP18NA	1/2" gas x 1/4" liquid
SVZ-KP24NA	5/8" gas x 3/8" liquid
SVZ-KP30NA	5/8" gas x 3/8" liquid
SVZ-KP36NA	5/8" gas x 3/8" liquid
SLZ Ceiling-cassette	
SLZ-KF09NA	3/8" gas x 1/4" liquid
SLZ-KF12NA	3/8" gas x 1/4" liquid
SLZ-KF15NA	1/2" gas x 1/4" liquid
SLZ-KF18NA	1/2" gas x 1/4" liquid
MLZ One-way Ceiling-cassette	
MLZ-KP09NA	3/8" gas x 1/4" liquid
MLZ-KP12NA	3/8" gas x 1/4" liquid
MLZ-KP18NA	1/2" gas x 1/4" liquid
SEZ Horizontal-ducted	
SEZ-KD09NA4	3/8" gas x 1/4" liquid
SEZ-KD12NA4	3/8" gas x 1/4" liquid
SEZ-KD15NA4	1/2" gas x 1/4" liquid
SEZ-KD18NA4	1/2" gas x 1/4" liquid
PEAD Horizontal-ducted	
PEAD-A09AA7	3/8" gas x 1/4" liquid
PEAD-A12AA7*	3/8" gas x 1/4" liquid
PEAD-A15AA7	1/2" gas x 1/4" liquid
PEAD-A18AA7	1/2" gas x 1/4" liquid
PEAD-A24AA7	5/8" gas x 3/8" liquid
PEAD-A30AA7	5/8" gas x 3/8" liquid
PEAD-A36AA7	5/8" gas x 3/8" liquid

The following MXZ units must utilize at least one branch box	
MXZ-8C48NA	MXZ-4C36NAHZ
MXZ-8C60NA	MXZ-5C42NAHZ
	MXZ-8C48NAHZ

Branch Boxes		
Port	Gas	Liquid
PAC-MKA31BC [3-Port]		
A; B; C	3/8"	1/4"
PAC-MKA51BC [5-Port]		
A; B; C; D	3/8"	1/4"
E	1/2"	1/4"

Notes for application:

Check the lineset sizes for your indoor selected models.

Select the branch box or boxes needed for your application.

Compare indoor unit lineset sizes to branch box or outdoor unit port sizes.

* Connect 15K+ indoor units to the larger 1/2" port on the PAC-MKA51BC branch box or outdoor unit.

Adapt lineset size with appropriate port adapter from above list.

Notes:

* Port adapter (MAC-A4555JP-E) is needed for PEAD-A12AA7 connection with SUZ-KA12NA2

ADDITIONAL M-SERIES INFORMATION

M-SERIES OPERATING CONDITIONS

		Indoor Intake Air Temperature	
		Models	Conditions
Cooling	Maximum	SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-2C20/3C24/3C30NAHZ2	95° F D.B., 71° F W.B.
		MUZ-FH MUZ-Y-GL MUZ-Y-D MUZ-HM MUZ-JP MUZ-WR MUZ-FZ MXZ-8C48NA/8C60NA MXZ-4C36/5C42/8C48NAHZ	90° F D.B., 73° F W.B.
	Minimum	MUZ-FH MUZ-Y-GL MUZ-Y-D MUZ-HM MUZ-JP MUZ-WR MUZ-FZ SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-8C48NA/8C60NA MXZ-2C20/3C24/3C30NAHZ2 MXZ-4C36/5C42/8C48NAHZ	67° F D.B., 57° F W.B.
Heating	Maximum	MUZ-FH MUZ-GL MUZ-D MUZ-HM MUZ-JP MUZ-WR MUZ-FZ SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-8C48NA/8C60NA MXZ-2C20/3C24/3C30NAHZ2 MXZ-4C36/5C42/8C48NAHZ	80° F D.B., 67° F W.B.
	Minimum	MUZ-FH MUZ-GL MUZ-D MUZ-HM MUZ-JP MUZ-WR MUZ-FZ SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-8C48NA/8C60NA MXZ-2C20/3C24/3C30NAHZ2 MXZ-4C36/5C42/8C48NAHZ	70° F D.B., 67° F W.B.

		Outdoor Intake Air Temperature	
		Models	Conditions
Cooling	Maximum	MUZ-FH MUZ-Y-GL MUZ-Y-D MUZ-HM MUZ-JP MUZ-WR MUZ-FZ SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-8C48NA/8C60NA MXZ-2C20/3C24/3C30NAHZ2 MXZ-4C36/5C42/8C48NAHZ	115° F D.B.
	Minimum	MUZ-FH MUZ-Y-GL MUZ-Y-D MUZ-HM MUZ-JP MUZ-FZ SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-2C20/3C24/3C30NAHZ MXZ-8C48NA/8C60NA MXZ-4C36/5C42/8C48NAHZ	14° F D.B.
		MUZ-WR	32° F D.B.
Heating	Maximum	MUZ-FH MUZ-GL MUZ-D MUZ-HM MUZ-JP MUZ-WR MUZ-FZ SUZ-KA-NA2 MXZ-2C20NA2 MXZ-3C24/3C30/4C36/5C42NA2 MXZ-8C48NA/8C60NA	75° F D.B., 65° F W.B.
		MUZ-2C20/3C24/3C30NAHZ2 MXZ-4C36/5C42/8C48NAHZ	70° F D.B., 59° F W.B.
	Minimum	MUZ-GL MUZ-HM MUZ-JP	-4° F D.B., -5° F W.B.
		MUZ-WR	5° F D.B., 4° F W.B.
		MUZ-FZ	-13° F D.B., -14° F W.B.
		MUZ-FH	-13° F D.B., -14° F W.B.
		MUZ-D	14° F D.B., 13° F W.B.
		SUZ-KA-NA2	-4° F D.B., -5° F W.B. (09/12/15/18) 14° F D.B., 12° F W.B. (24/30/36)
		MUZ-2C20/3C24/3C30NAHZ2	-12° F D.B., -13° F W.B.
		MUZ-4C36/5C42/8C48NAHZ	-13° F W.B.
		MUZ-8C48NA/8C60NA	-4° F W.B.
		MUZ-2C20NA2	
		MUZ-3C24/3C30/4C36/5C42NA2	6° F D.B., 5° F W.B.

ADDITIONAL M-SERIES INFORMATION

REFRIGERANT LINE LENGTH FLARE/FLARE

Indoor Unit	Outdoor Unit	Length in Feet	Vertical Separation in Feet
MSZ-FH06NA	MUZ-FH06NA(H)	65	40
MSZ-FH09NA	MUZ-FH09NA(H)	65	40
MSZ-FH12NA	MUZ-FH12NA(H)	65	40
MSZ-FH15NA	MUZ-FH15NA(H)	100	50
MSZ-FH18NA	MUZ-FH18NA(H)2	100	50
MSY-GL09NA	MUY-GL09NA	65	40
MSY-GL12NA	MUY-GL12NA	65	40
MSY-GL15NA	MUY-GL15NA	65	40
MSY-GL18NA	MUY-GL18NA	100	50
MSY-GL24NA	MUY-GL24NA	100	50
MSZ-GL09NA	MUZ-GL09NA	65	40
MSZ-GL12NA	MUZ-GL12NA	65	40
MSZ-GL15NA	MUZ-GL15NA	65	40
MSZ-GL18NA	MUZ-GL18NA	100	50
MSZ-GL24NA	MUZ-GL24NA	100	50
MSY-D30NA	MUY-D30NA	100	50
MSY-D36NA	MUY-D36NA	100	50
MSZ-D30NA	MUZ-D30NA	100	50
MSZ-D36NA	MUZ-D36NA	100	50
MSZ-HM09NA	MUZ-HM09NA	65	40
MSZ-HM12NA	MUZ-HM12NA	65	40
MSZ-HM15NA	MUZ-HM15NA	65	40
MSZ-HM18NA	MUZ-HM18NA	65	40
MSZ-HM24NA	MUZ-HM24NA	100	50
MSZ-JP09WA	MUZ-JP09WA	65	40
MSZ-JP12WA	MUZ-JP12WA	65	40
MSZ-WR09NA	MUZ-WR09NA	65	40
MSZ-WR12NA	MUZ-WR12NA	65	40
MSZ-WR18NA	MUZ-WR18NA	65	40
MSZ-WR24NA	MUZ-WR24NA	100	50
MFZ-KJ09NA	MUFZ-KJ09NAHZ	65	40
MFZ-KJ12NA	MUFZ-KJ12NAHZ	65	40
MFZ-KJ15NA	MUFZ-KJ15NAHZ	100	50
MFZ-KJ18NA	MUFZ-KJ18NAHZ	100	50
MLZ-KP09NA; SLZ-KF09NA; SEZ-KD09NA4; PEAD-A09AA7	SUZ-KA09NA2	65	40
MLZ-KP12NA; SVZ-KP12NA; SEZ-KD12NA4; SLZ-KF12NA; PEAD-A12AA7	SUZ-KA12NA2	65	40
MLZ-KP15NA; SLZ-KF15NA; SEZ-KD15NA4; PEAD-A15AA7	SUZ-KA15NA2	65	40
SVZ-KP18NA; SLZ-KF18NA; SEZ-KD18NA4; PEAD-A18AA7	SUZ-KA18NA2	100	50
SVZ-KP24NA; PEAD-A24AA7	SUZ-KA24NA2	100	100
SVZ-KP30NA; PEAD-A30AA7	SUZ-KA30NA2	100	100
SVZ-KP36NA; PEAD-A36AA7	SUZ-KA36NA2	100	100

Indoor Unit	Outdoor Unit	Length in Feet	Vertical Separation in Feet
MSZ-GL06/09/12/15NA; MFZ; SLZ-KF09/12/15; MLZ-KP09/12; SEZ; PEAD-A09/12/15AA7; SVZ-KP12NA; MSZ-FH06/09/12/15; MSZ-EF09/12/15; MFZ-KJ09/12/15; SEZ-KD09/12/15	MXZ-2C20NA2	164	49*/33
MSZ-GL06/09/12/15/18NA; MSZ-FH; MSZ-EF; MFZ; SVZ-KP12/18NA; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A09/12/15/18AA7	MXZ-3C24NA2	230	49
MSZ-GL; MSZ-FH; MSZ-EF; MFZ; SVZ-KP12/18/24NA; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A09/12/15/18/24AA7	MXZ-3C30NA2	230	49
	MXZ-4C36NA2	230	49
MSZ-GL; MSZ-FH; MSZ-EF; MFZ; SVZ-KP12/18/24NA; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A09/12/15/18/24AA7	MXZ-5C42NA2	262	49
MSZ-GL; MSZ-FH; MSZ-EF; MFZ; SVZ; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A12/18/24/36AA7	MXZ-8C48NA/8C60NA	492	131*/164
MSZ-GL06/09/12/15NA; MSZ-FH06/09/12/15NA; MSZ-EF; MFZ; SVZ-KP12NA; SLZ; MLZ-KP09/12; SEZ; PEAD-A09/12/15AA7	MXZ-2C20NAHZ2	164	49
MSZ-GL06/09/12/15/18NA; MSZ-FH; MSZ-EF; MFZ; SVZ-KP12/18NA; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A09/12/15/18AA7	MXZ-3C24NAHZ2	230	49
MSZ-GL; MSZ-FH; MSZ-EF; MFZ; SVZ-KP12/18/24NA; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A09/12/15/18/24AA7	MXZ-3C30NAHZ2	230	49
MSZ-GL; MSZ-FH; MSZ-EF; MFZ; SVZ; SLZ-KF09/12/15; MLZ; SEZ; PEAD-A12/18/24/36AA7	MXZ-4C36NAHZ	492	131*/164
	MXZ-5C42NAHZ	492	131*/164
	MXZ-8C48NAHZ	492	131*/164

Notes

- * Branch Box should be placed within the level between the outdoor unit and indoor units.

ADDITIONAL M-SERIES INFORMATION

M-SERIES AIR OUTLET COVERAGE RANGE*

Model	Mode	Function	Airflow (CFM)	Coverage (FT)
MSZ-FH06NA MSZ-FH09NA	HEAT	DRY	437	29.8
	COOL	WET	328	22.5
MSZ-FH12NA	HEAT	DRY	454	31.0
	COOL	WET	342	23.5
MSZ-FH15NA	HEAT	DRY	497	33.8
	COOL	WET	354	24.1
MSZ-FH18NA2	HEAT	DRY	514	34.9
	COOL	WET	395	27.0
MSZ-GL06NA MSZ/Y-GL09NA MSZ/Y-GL12NA	HEAT	DRY	406	29.5
	COOL	WET	286	21.0
MSZ/Y-GL15NA	HEAT	DRY	463	33.5
	COOL	WET	385	28.0
MSZ/Y-GL18NA	HEAT	DRY	646	44.0
	COOL	WET	581	39.7
MSZ/Y-GL24NA	HEAT	DRY	738	36.9
	COOL	WET	661	33.2
MSZ/Y-D30NA MSZ/Y-D36NA	HEAT	DRY	848	45.0
	COOL	WET	763	40.7
MFZ-KJ09NA MFZ-KJ12NA	HEAT	DRY	417	29.6
	COOL	WET	354	25.3
MFZ-KJ15NA	HEAT	DRY	470	33.3
	COOL	WET	366	26.2
MFZ-KJ18NA	HEAT	DRY	470	33.3
	COOL	WET	417	29.7
SLZ-KF09NA	HEAT	DRY	300	15.1
	COOL	WET	270	13.7
SLZ-KF12NA	HEAT	DRY	336	16.9
	COOL	WET	302	15.2
SLZ-KF15NA	HEAT	DRY	405	20.3
	COOL	WET	365	18.3
SLZ-KF18NA	HEAT	DRY	475	23.7
	COOL	WET	429	21.4
MSZ-EF09NAW(B)(S)	HEAT	DRY	420	29.2
	COOL	WET	319	22.3
MSZ-EF12NAW(B)(S)	HEAT	DRY	448	31.1
	COOL	WET	319	22.3
MSZ-EF15NAW(B)(S)	HEAT	DRY	448	31.1
	COOL	WET	313	21.9
MSZ-EF18NAW(B)(S)	HEAT	DRY	466	32.3
	COOL	WET	334	23.4

MSZ-HM09NA MSZ-HM12NA	HEAT	DRY	406	29.5
	COOL	WET	286	21.0
MSZ-HM15NA	HEAT	DRY	463	33.5
	COOL	WET	385	28.0
MSZ-HM18NA	HEAT	DRY	625	42.6
	COOL	WET	562	38.4
MSZ-HM24NA	HEAT	DRY	702	47.7
	COOL	WET	632	43.1
MSZ-JP09WA	HEAT	DRY	406	29.5
	COOL	WET	364	26.5
MSZ-JP12WA	HEAT	DRY	406	29.5
	COOL	WET	364	26.5
MSZ-WR09NA	HEAT	DRY	406	29.5
	COOL	WET	286	21.0
MSZ-WR12NA	HEAT	DRY	406	29.5
	COOL	WET	286	21.0
MSZ-WR18NA	HEAT	DRY	625	42.6
	COOL	WET	562	38.4
MSZ-WR24NA	HEAT	DRY	702	47.7
	COOL	WET	632	43.1
MLZ-KP09NA	HEAT	DRY	311	20.7
	COOL	WET	325	21.7
MLZ-KP12NA	HEAT	DRY	332	22.1
	COOL	WET	350	23.3
MLZ-KP18NA	HEAT	DRY	403	26.7
	COOL	WET	417	27.6

ADDITIONAL M-SERIES INFORMATION

M-SERIES COOLING CAPACITY CORRECTION FACTOR

Model	Refrigerant Piping Length (One-way)			
	25 Ft. (Std)	40 Ft.	65 Ft.	100 Ft.
MUZ-FH06NA(H)	Capacity x 1.0	Capacity x 0.988	Capacity x 0.967	-
MUZ-FH09NA(H)				
MUZ-FH12NA(H)				
MUZ-FH15NA(H)	Capacity x 1.0	Capacity x 0.985	Capacity x 0.963	Capacity x 0.933
MUZ-FH18NA(H)2				
MUZ/Y-GL09NA	Capacity x 1.0	Capacity x 0.988	Capacity x 0.968	-
MUZ/Y-GL12NA				
MUZ/Y-GL15NA				
MUZ/Y-GL18NA	Capacity x 1.0	Capacity x 0.985	Capacity x 0.963	Capacity x 0.933
MUZ/Y-GL24NA		Capacity x 0.983	Capacity x 0.956	Capacity x 0.921
MUZ/Y-D30NA-1		Capacity x 0.976	Capacity x 0.937	Capacity x 0.887
MUZ/Y-D36NA-1		Capacity x 0.974	Capacity x 0.932	Capacity x 0.878
MUZ-HM09NA	Capacity x 1.0	Capacity x 0.988	Capacity x 0.967	-
MUZ-HM12NA				
MUZ-HM15NA				
MUZ-HM18NA	Capacity x 1.0	Capacity x 0.985	Capacity x 0.963	Capacity x 0.933
MUZ-HM24NA	Capacity x 1.0	Capacity x 0.983	Capacity x 0.956	Capacity x 0.921
MUZ-JP09WA	Capacity x 1.0	Capacity x 0.988	Capacity x 0.967	-
MUZ-JP12WA				
MUZ-WR09NA				
MUZ-WR12NA				
MUZ-WR18NA	Capacity x 1.0	Capacity x 0.985	Capacity x 0.963	Capacity x 0.933
MUZ-WR24NA	Capacity x 1.0	Capacity x 0.983	Capacity x 0.956	Capacity x 0.921
MUFZ-KJ09NAHZ	Capacity x 1.0	Capacity x 0.988	Capacity x 0.967	-
MUFZ-KJ12NAHZ				-
MUFZ-KJ15NAHZ	Capacity x 1.0	Capacity x 0.985	Capacity x 0.963	Capacity x 0.933
MUFZ-KJ18NAHZ				
SUZ-KA09NA2	Capacity x 1.0	Capacity x 0.988	Capacity x 0.967	-
SUZ-KA12NA2				
SUZ-KA15NA2				
SUZ-KA18NA2	Capacity x 1.0	Capacity x 0.985	Capacity x 0.963	Capacity x 0.933
SUZ-KA24NA2	Capacity x 1.0	Capacity x 0.983	Capacity x 0.956	Capacity x 0.921
SUZ-KA30NA2				
SUZ-KA36NA2				

Notes:

*Air coverage represents the distance with one ft/sec air speed when blowing out horizontally from the unit operating at the High fan speed. This is only a general guideline; actual coverage depends on size and layout of the room.

MULTI-ZONE EFFICIENCY RATINGS

Model	Configuration	SEER	EER	HSPF
MXZ-2C20NA2	Ducted	16	10	9.3
	Mixed	18	11.35	9.65
	Non-Ducted	20	12.7	10
MXZ-3C24NA2	Ducted	16	11.2	9.2
	Mixed	18	12.4	9.5
	Non-Ducted	20	13.6	9.8
MXZ-3C30NA2	Ducted	16.2	9.6	9.6
	Mixed	17.6	10.1	10.1
	Non-Ducted	19	10.6	10.6
MXZ-4C36NA2	Ducted	16	8.7	9.8
	Mixed	17.6	9.05	10.4
	Non-Ducted	19.2	9.4	11
MXZ-5C42NA2	Ducted	15.2	9	9.1
	Mixed	17.45	9.1	9.7
	Non-Ducted	19.7	9.2	10.3
MXZ-8C48NA	Ducted	14.7	9.5	10.1
	Mixed	16.8	10.75	10.75
	Non-Ducted	18.9	12	11.4
MXZ-8C60NA	Ducted	15.1	9.6	10
	Mixed	16.25	11.05	10.25
	Non-Ducted	17.4	12.5	10.5
MXZ-2C20NAHZ2	Ducted	15	11	9.5
	Mixed	16	12.25	9.65
	Non-Ducted	17	13.5	9.8
MXZ-3C24NAHZ2	Ducted	15.5	10	9
	Mixed	17.25	11.75	9.5
	Non-Ducted	19	13.5	10
MXZ-3C30NAHZ2	Ducted	16	10.3	9.8
	Mixed	17	11.4	10.4
	Non-Ducted	18	12.5	11
MXZ-4C36NAHZ	Ducted	15.8	11.3	10.1
	Mixed	17.45	12.65	10.7
	Non-Ducted	19.1	14	11.3
MXZ-5C42NAHZ	Ducted	15	10.8	10.1
	Mixed	17	12.1	10.55
	Non-Ducted	19	13.4	11
MXZ-8C48NAHZ	Ducted	14.7	9.5	10
	Mixed	16.8	10.75	10.5
	Non-Ducted	18.9	12	11

ADDITIONAL M-SERIES INFORMATION

HEATING CAPACITY

Outdoor Temperature Degrees (° F)		50	41.0	32.0	23.0	14.0	5.0	-4	-13
MSZ-FH06NA/MUZ-FH06NA	Heating Capacity (Btu/h)	8,700	8,700	8,700	8,700	8,700	8,700	7,650	6,430
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	74%
MSZ-FH09NA/MUZ-FH09NA	Heating Capacity (Btu/h)	10,900	10,900	10,900	10,900	10,900	10,900	9,260	7,630
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	85%	70%
MSZ-FH12NA/MUZ-FH12NA	Heating Capacity (Btu/h)	13,600	13,600	13,600	13,600	13,600	13,600	11,690	9,920
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	73%
MSZ-FH15NA/MUZ-FH15NA	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	16,200	14,580
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	90%	81%
MSZ-FH18NA2/MUZ-FH18NA2	Heating Capacity (Btu/h)	20,300	20,300	20,300	20,300	20,300	20,300	17,250	14,210
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	85%	70%
MSZ-FH06NA/MUZ-FH06NAH	Heating Capacity (Btu/h)	8,700	8,700	8,700	8,700	8,700	8,700	7,650	6,430
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	74%
MSZ-FH09NA/MUZ-FH09NAH	Heating Capacity (Btu/h)	10,900	10,900	10,900	10,900	10,900	10,900	9,370	7,950
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	73%
MSZ-FH12NA/MUZ-FH12NAH	Heating Capacity (Btu/h)	13,600	13,600	13,600	13,600	13,600	13,600	11,690	9,920
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	73%
MSZ-FH15NA/MUZ-FH15NAH	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	16,200	14,580
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	90%	81%
MSZ-FH18NA2/MUZ-FH18NAH2	Heating Capacity (Btu/h)	20,300	20,300	20,300	20,300	20,300	20,300	17,250	14,210
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	85%	70%
MSZ-GL09NA/MUZ-GL09NA	Heating Capacity (Btu/h)	10,900	10,900	10,900	10,460	9,480	8,170	6,860	-
	Percentage of Rated Capacity	100%	100%	100%	96%	87%	75%	63%	0%
MSZ-GL12NA/MUZ-GL12NA	Heating Capacity (Btu/h)	14,400	14,400	14,110	12,960	11,660	9,790	7,920	-
	Percentage of Rated Capacity	100%	100%	98%	90%	81%	68%	55%	0%
MSZ-GL15NA/MUZ-GL15NA	Heating Capacity (Btu/h)	18,000	17,100	16,920	16,920	16,200	13,680	11,160	-
	Percentage of Rated Capacity	100%	95%	94%	94%	90%	76%	62%	0%
MSZ-GL18NA/MUZ-GL18NA	Heating Capacity (Btu/h)	21,600	21,600	21,600	19,440	17,060	14,900	12,520	-
	Percentage of Rated Capacity	100%	100%	100%	90%	79%	69%	58%	0%
MSZ-GL24NA/MUZ-GL24NA	Heating Capacity (Btu/h)	27,600	27,600	27,600	26,220	23,460	19,320	15,450	-
	Percentage of Rated Capacity	100%	100%	100%	95%	85%	70%	56%	0%
MSZ-HM09NA/MUZ-HM09NA	Heating Capacity (Btu/h)	10,900	10,570	9,480	8,500	7,300	5,990	4,680	-
	Percentage of Rated Capacity	100%	97%	87%	78%	67%	55%	43%	0%
MSZ-HM12NA/MUZ-HM12NA	Heating Capacity (Btu/h)	12,200	12,200	11,220	10,120	9,020	7,440	5,850	-
	Percentage of Rated Capacity	100%	100%	92%	83%	74%	61%	48%	0%
MSZ-HM15NA/MUZ-HM15NA	Heating Capacity (Btu/h)	18,000	15,300	14,940	14,400	13,680	12,240	10,620	-
	Percentage of Rated Capacity	100%	85%	83%	80%	76%	68%	59%	0%
MSZ-HM18NA/MUZ-HM18NA	Heating Capacity (Btu/h)	18,000	18,000	18,000	16,560	14,580	12,780	10,980	-
	Percentage of Rated Capacity	100%	100%	100%	92%	81%	71%	61%	0%
MSZ-HM24NA/MUZ-HM24NA	Heating Capacity (Btu/h)	26,000	24,440	22,360	20,020	17,680	15,600	13,260	-
	Percentage of Rated Capacity	100%	94%	86%	77%	68%	60%	51%	0%
MSZ-D30NA/MUZ-D30NA	Heating Capacity (Btu/h)	32,600	28,030	25,420	22,820	19,880	-	-	-
	Percentage of Rated Capacity	100%	86%	78%	70%	61%	0%	0%	0%
MSZ-D36NA/MUZ-D36NA	Heating Capacity (Btu/h)	35,200	29,560	27,450	25,340	22,880	-	-	-
	Percentage of Rated Capacity	100%	84%	78%	72%	65%	0%	0%	0%
MSZ-JP09NA/MUZ-JP09NA	Heating Capacity (Btu/h)	10,900	10,570	9,480	8,500	7,300	5,990	4,680	-
	Percentage of Rated Capacity	100%	97%	87%	78%	67%	55%	43%	0%
MSZ-JP12NA/MUZ-JP12NA	Heating Capacity (Btu/h)	12,200	12,200	11,220	10,120	9,020	7,440	5,850	-
	Percentage of Rated Capacity	100%	100%	92%	83%	74%	61%	48%	0%
MSZ-WR09NA/MUZ-WR09NA	Heating Capacity (Btu/h)	10,900	10,570	9,480	8,500	7,300	5,990	-	-
	Percentage of Rated Capacity	100%	97%	87%	78%	67%	55%	0%	0%
MSZ-WR12NA/MUZ-WR12NA	Heating Capacity (Btu/h)	12,200	12,200	11,220	10,120	9,020	7,440	-	-
	Percentage of Rated Capacity	100%	100%	92%	83%	74%	61%	0%	0%
MSZ-WR18NA/MUZ-WR18NA	Heating Capacity (Btu/h)	18,000	18,000	18,000	16,560	14,580	12,780	-	-
	Percentage of Rated Capacity	100%	100%	100%	92%	81%	71%	0%	0%
MSZ-WR24NA/MUZ-WR24NA	Heating Capacity (Btu/h)	26,000	24,440	22,360	20,020	17,680	15,600	-	-
	Percentage of Rated Capacity	100%	94%	86%	77%	68%	60%	0%	0%
MFZ-KJ09NA/MUFZ-KJ09NAHZ	Heating Capacity (Btu/h)	11,000	11,000	11,000	11,000	11,000	11,000	9,130	7,260
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	83%	66%
MFZ-KJ12NA/MUFZ-KJ12NAHZ	Heating Capacity (Btu/h)	13,000	13,000	13,000	13,000	13,000	13,000	10,790	8,450
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	83%	65%
MFZ-KJ15NA/MUFZ-KJ15NAHZ	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	14,940	13,860
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	83%	77%
MFZ-KJ18NA/MUFZ-KJ18NAHZ	Heating Capacity (Btu/h)	21,000	21,000	21,000	21,000	21,000	21,000	18,480	15,960
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	76%

ADDITIONAL M-SERIES INFORMATION

HEATING CAPACITY

Outdoor Temperature Degrees (° F)		50	41.0	32.0	23.0	14.0	5.0	-4	-13
MLZ-KP09NA/SUZ-KA09NA2	Heating Capacity (Btu/h)	12,000	10,620	9,230	7,840	6,450	5,090	3,770	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
MLZ-KP12NA/SUZ-KA12NA2	Heating Capacity (Btu/h)	15,400	13,630	11,850	10,060	8,280	6,540	4,840	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
MLZ-KP18NA/SUZ-KA18NA2	Heating Capacity (Btu/h)	20,000	17,700	15,390	13,060	10,760	8,490	6,290	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SLZ-KF09NA/SUZ-KA09NA2	Heating Capacity (Btu/h)	11,000	9,730	8,460	7,180	5,920	4,670	3,460	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SLZ-KF12NA/SUZ-KA12NA2	Heating Capacity (Btu/h)	13,000	11,510	10,000	8,490	6,990	5,520	4,080	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SLZ-KF15NA/SUZ-KA15NA2	Heating Capacity (Btu/h)	18,000	15,930	13,850	11,760	9,680	7,640	5,660	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SLZ-KF18NA/SUZ-KA15NA2	Heating Capacity (Btu/h)	19,700	17,440	15,150	12,870	10,600	8,370	6,190	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SEZ-KD09NA4/SUZ-KA09NA2	Heating Capacity (Btu/h)	12,000	10,620	9,230	7,840	6,450	5,090	3,770	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SEZ-KD12NA4/SUZ-KA12NA2	Heating Capacity (Btu/h)	15,000	13,280	11,540	9,800	8,070	6,370	4,710	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SEZ-KD15NA4/SUZ-KA15NA2	Heating Capacity (Btu/h)	18,000	15,930	13,850	11,760	9,680	7,640	5,660	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SEZ-KD18NA4/SUZ-KA18NA2	Heating Capacity (Btu/h)	21,600	19,120	16,620	14,110	11,620	9,170	6,790	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A09AA7/SUZ-KA09NA2	Heating Capacity (Btu/h)	12,000	10,620	9,230	7,840	6,450	5,090	3,770	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A12AA7/SUZ-KA12NA2	Heating Capacity (Btu/h)	15,000	13,280	11,540	9,800	8,070	6,370	4,710	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A15AA7/SUZ-KA15NA2	Heating Capacity (Btu/h)	18,000	15,930	13,850	11,760	9,680	7,640	5,660	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A18AA7/SUZ-KA18NA2	Heating Capacity (Btu/h)	21,600	19,120	16,620	14,110	11,620	9,170	6,790	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A24AA7/SUZ-KA24NA2	Heating Capacity (Btu/h)	25,000	22,130	19,230	16,330	13,450	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
PEAD-A30AA7/SUZ-KA30NA2	Heating Capacity (Btu/h)	30,000	26,560	23,080	19,600	16,140	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
PEAD-A36AA7/SUZ-KA36NA2	Heating Capacity (Btu/h)	33,500	29,660	25,770	21,890	18,030	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
SVZ-KP12NA/SUZ-KA12NA2	Heating Capacity (Btu/h)	15,000	13,280	11,540	9,800	8,070	6,370	4,710	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SVZ-KP18NA/SUZ-KA18NA2	Heating Capacity (Btu/h)	21,600	19,120	16,620	14,110	11,620	9,170	6,790	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
SVZ-KP24NA/SUZ-KA24NA2	Heating Capacity (Btu/h)	25,000	22,130	19,230	16,330	13,450	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
SVZ-KP30NA/SUZ-KA36NA2	Heating Capacity (Btu/h)	30,000	26,560	23,080	19,600	16,140	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
SVZ-KP36NA/SUZ-KA36NA2	Heating Capacity (Btu/h)	33,500	29,660	25,770	21,890	18,030	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%

ADDITIONAL M-SERIES INFORMATION

HEATING CAPACITY

Outdoor Temperature Degrees (° F)		50	41.0	32.0	23.0	14.0	5.0	-4	-13
MXZ-2C20NA2	Heating Capacity (Btu/h)	22,000	22,000	18,920	15,840	12,980	9,900	-	-
	Percentage of Rated Capacity	100%	100%	86%	72%	59%	45%	0%	0%
MXZ-3C24NA2	Heating Capacity (Btu/h)	25,000	25,000	24,000	20,750	17,250	13,250	-	-
	Percentage of Rated Capacity	100%	100%	96%	83%	69%	53%	0%	0%
MXZ-3C30NA2	Heating Capacity (Btu/h)	28600	28,600	28,020	24,310	20,300	15,730	-	-
	Percentage of Rated Capacity	100%	100%	98%	85%	71%	55%	0%	0%
MXZ-4C36NA2	Heating Capacity (Btu/h)	36000	36,000	33,480	29,160	24,120	18,720	-	-
	Percentage of Rated Capacity	100%	100%	93%	81%	67%	52%	0%	0%
MXZ-5C42NA2	Heating Capacity (Btu/h)	45000	45,000	41,850	36,450	30,150	23,400	-	-
	Percentage of Rated Capacity	100%	100%	93%	81%	67%	52%	0%	0%
MXZ-8C48NA	Heating Capacity (Btu/h)	48000	48,000	48,000	39,840	32,160	28,800	25440	-
	Percentage of Rated Capacity	100%	100%	100%	83%	67%	60%	53%	0%
MXZ-8C60NA	Heating Capacity (Btu/h)	60000	60,000	60,000	-	-	51,600	-	-
	Percentage of Rated Capacity	100%	100%	100%	0%	0%	86%	0%	0%
MXZ-2C20NAHZ2	Heating Capacity (Btu/h)	22,000	22,000	22,000	22,000	22,000	22,000	21,120	20,460
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	96%	93%
MXZ-3C24NAHZ2	Heating Capacity (Btu/h)	25,000	25,000	25,000	25,000	25,000	25,000	23,750	22,500
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	95%	90%
MXZ-3C30NAHZ2	Heating Capacity (Btu/h)	28,600	28,600	28,600	28,600	28,600	28,600	26,880	25,160
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	94%	88%
MXZ-4C36NAHZ	Heating Capacity (Btu/h)	36,000	36,000	36,000	36,000	36,000	36,000	31,680	27,360
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	76%
MXZ-5C42NAHZ	Heating Capacity (Btu/h)	42,000	42,000	42,000	42,000	42,000	42,000	36,960	31,920
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	76%
MXZ-8C48NAHZ	Heating Capacity (Btu/h)	48,000	48,000	48,000	48,000	48,000	48,000	42,240	36,480
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	76%



Visit mitsubishicomfort.com to find a Diamond Contractor® in your area.



© 2019 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.
Mitsubishi Electric, Lossnay, and the three-diamond logo are trademarks of Mitsubishi Electric Corporation. H2i and kumo cloud are registered trademarks of Mitsubishi Electric US, Inc. All other product names mentioned herein are trademarks or registered trademarks of their respective owners.
ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the United States Environmental Protection Agency.
Use of the AHRI Certified™ mark indicates a manufacturer's participation in the certification program. For verification of certification for individual products, go to www.ahridirectory.org.
Specifications shown in this brochure are subject to change without notice. See complete warranty for terms, conditions and limitations. A copy is available from Mitsubishi Electric.

M-SERIES CATALOG | 01.2019 REVISED | SKU: ME-1022 | Printed in the USA



MAKE COMFORT *Personal*

Mitsubishi Electric Cooling & Heating
1340 Satellite Boulevard, Suwanee, GA 30024
Phone: 800-433-4822 Fax: 800-658-1458

